

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Cumberland Homes
PROPERTY LOCATION: Hoover Rd
SUBDIVISION: Persimmon Hill
NEW [X] REPAIR [] EXPANSION []
Type of Structure: 52x43 SFD-4BR
Proposed Wastewater System Type: Pump to 25% Red. syst
Projected Daily Flow: 480 GPD
Number of bedrooms: 4 Number of Occupants: 8 max
Basement [] Yes [X] No
Pump Required: [X] Yes [] No [] May be required based on final location and elevations of facilities
Type of Water Supply: [] Community [X] Public [] Well Distance from well 50 feet
Permit conditions: Meet onsite - maintain all set back, must bring in 8 to 12" approved cover soil stub out plumbing shallow well

Authorized State Agent: J. Woods Date: 08-07-07 SEE ATTACHED
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate government requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be installed in accordance with the attached system layout.

ISSUED TO: Cumberland Homes
PROPERTY LOCATION: Hoover Rd
SUBDIVISION: Persimmon Hill
Facility Type: SFD-52x43 4BR [X] New [] Expansion [] Repair
Basement? [] Yes [X] No Basement Fixtures? [] Yes [X] No
Type of Wastewater System** Pump to 25% Red. syst (Initial) Wastewater Flow: 480 GPD
(See note below, if applicable [X]) 640 LF of LPP (Repair)

Installation Requirements/Conditions

Septic Tank Size 1000 gallons Exact length of each trench 1x410 feet Trench Spacing: 9 feet
Pump Tank Size 1000 gallons Trenches shall be installed on contour at a Soil Cover: 6 inches
Maximum Trench Depth of: 12 max inches (Maximum soil cover shall not exceed 36" above the trench bottom)
Pump Requirements: _____ ft. TDH vs. _____ GPM
Aggregate Depth: _____
Conditions: _____

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change of ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: J. Woods Date: 08-07-07 SEE ATTACHED
Construction Authorization Expiration Date: 08-07-2012

HTE# 07-500-17818

Permit # 24259

Harnett County Department of Public Health Site Sketch

ISSUED TO: Cumber Land Homes


PROPERTY LOCATION: Hoover Rd

SUBDIVISION Persimmon Hill

LO'

Authorized State Agent: J. Lani

Date: 08-07-07

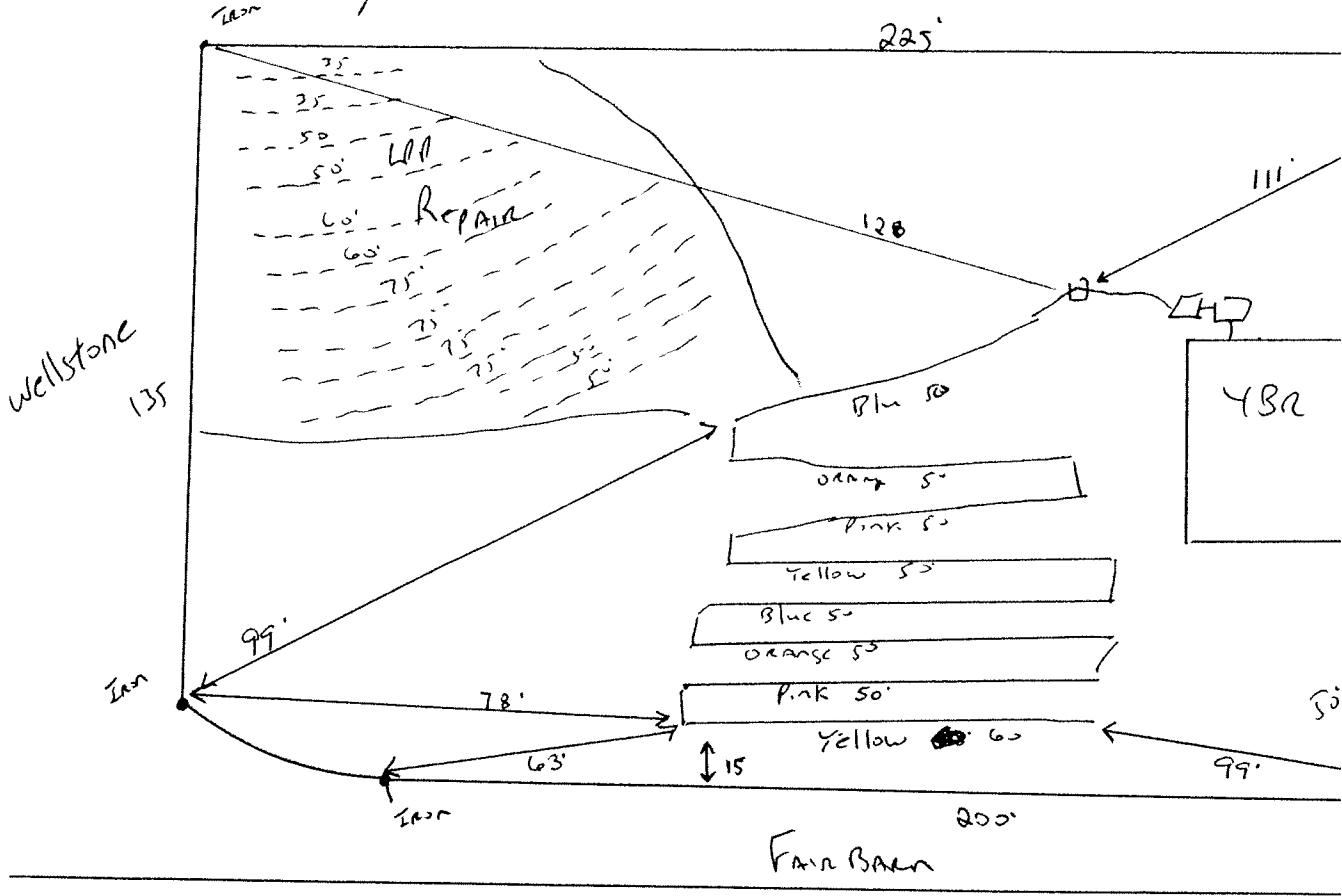

Meet onsite for layout

Maintain all setbacks

Install 1x410 125% Reduction system at 12" max

Must bury in 8 to 12" approved soil