

HTE# 07-50017849

Harrell County Department of Public Health

24168

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Cumberland Homes
PROPERTY LOCATION: 1115
SUBDIVISION: Crestview Est
LOT #: 192
Type of Structure: SFD-56x38-3BR
Proposed Wastewater System Type: 25% Reduction system
Projected Daily Flow: 360 GPD
Number of bedrooms: 3
Number of Occupants: 6 max
Basement: No
Pump Required: No
Type of Water Supply: Public
Distance from well: 50 feet
Permit valid for: Five years
Permit conditions: STUB OUT PLUMBING SHALLOW AT GROUND LEVEL OR HIGHER WHERE SHOWN MAINTAIN ALL SETBACKS MEET INSIDE IF PROBLEMS OR QUESTIONS ARISE

Authorized State Agent: [Signature] Date: 07-03-07 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Cumberland Homes
PROPERTY LOCATION: 1115
SUBDIVISION: Crestview Est
LOT #: 192
Facility Type: SFD-56x38-3BR
Basement?: No
Type of Wastewater System: 25% Reduction sys (Initial)
Wastewater Flow: 360 GPD
(See note below, if applicable) 240 LF 1 WPP (Repair)

Installation Requirements/Conditions

Septic Tank Size: 1000 gallons
Pump Tank Size:
Exact length of each trench: 1x150 feet
Trench Spacing: 9 Feet on Center
Soil Cover: 6 inches
Maximum Trench Depth of: 18.24 inches
(Pump Requirements: ft. TDH vs. GPM)
Aggregate Depth: inches below pipe, inches above pipe, inches total

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: Date:

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: [Signature] Date: 07-03-07 SEE ATTACHED SITE SKETCH
Construction Authorization Expiration Date: 07-03-2012


HTE# 07-500-17849

Permit # 24168

# Harnett County Department of Public Health Site Sketch

ISSUED TO: Cumberland Homes PROPERTY LOCATOR: 1115  
SUBDIVISION: CRESTVIEW Est. LOT # 192

Authorized State Agent: Ja Wares Date: 07-27-07

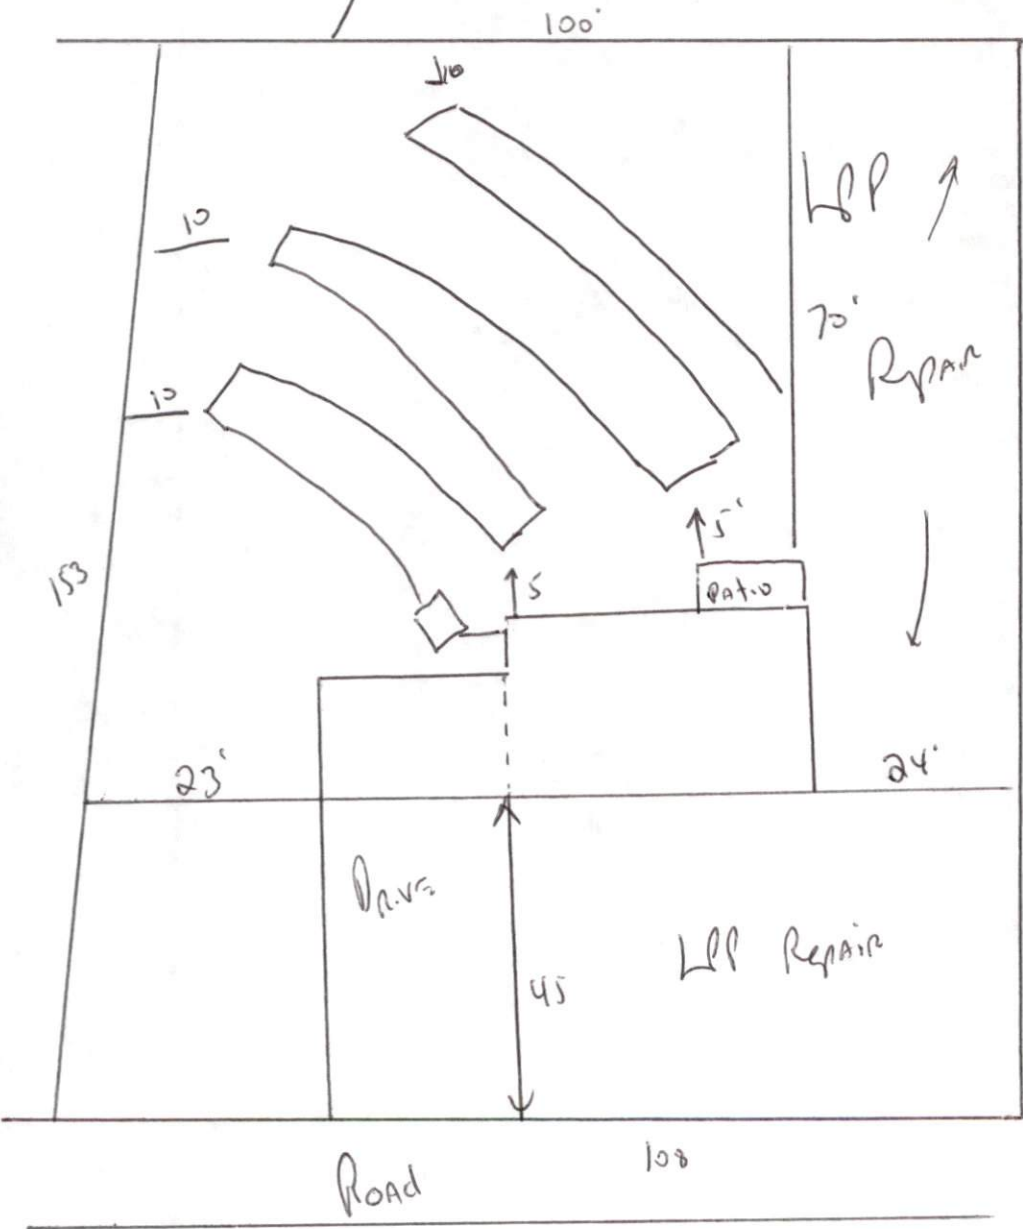

STUB out  
Plumbing Shallow  
At ground level or  
higher where shown  
maintain all  
Setbacks

153  
Install 1x150  
25% Reduction system  
At 18 to 24" Deep.  
Meet onsite if  
Problems or Questions  
ARISE