

HTE# 07-50017973

Harrison County Department of Public Health

24189

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Blackwell Homes
PROPERTY LOCATION: 1229
SUBDIVISION: Summer H. 11
LOT #: 35
Type of Structure: SFD-68x47 3BR
Proposed Wastewater System Type: 25% Reduction System
Projected Daily Flow: 360 GPD
Number of bedrooms: 3 Number of Occupants: 6 max
Basement: No
Pump Required: No

Type of Water Supply: Public
Permit valid for: Five years
Permit conditions: Meet on site for final layout maintain all set back
SUBST plumbing shallow at ground level or higher where shown
Key Plan: 1/4" = 20' from Rear Property Line 1/32" from side property line Along SR 1229

Authorized State Agent: J. W. ... Date: 07-20-07 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Blackwell Homes
PROPERTY LOCATION: 1229
SUBDIVISION: Summer H. 11
LOT #: 35
Facility Type: SFD-68x47-3BR New
Basement? No
Type of Wastewater System: 25% Reduction System (Initial)
Wastewater Flow: 360 GPD
(See note below, if applicable) 480 LF of LPP Repair (Repair)

Installation Requirements/Conditions

Septic Tank Size: 1000 gallons
Exact length of each trench: 1 x 300 feet
Trench Spacing: 9 Feet on Center
Pump Tank Size: ... gallons
Trenches shall be installed on contour at a
Maximum Trench Depth of: 18 inches
(Pump Requirements: ... ft. TDH vs. ... GPM)
Aggregate Depth: ... inches above pipe
Conditions: ... inches total

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: ... Date: ...

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: J. W. ... Date: 07-20-07 SEE ATTACHED SITE SKETCH
Construction Authorization Expiration Date: 07-20-2012


HTE# 07-50017973

Permit # 24189

Harnett County Department of Public Health Site Sketch

ISSUED TO: Blackwell Homes PROPERTY LOCATOR: 1229
SUBDIVISION: summerhills LOT # 35

Authorized State Agent: [Signature] Date: 07-20-07

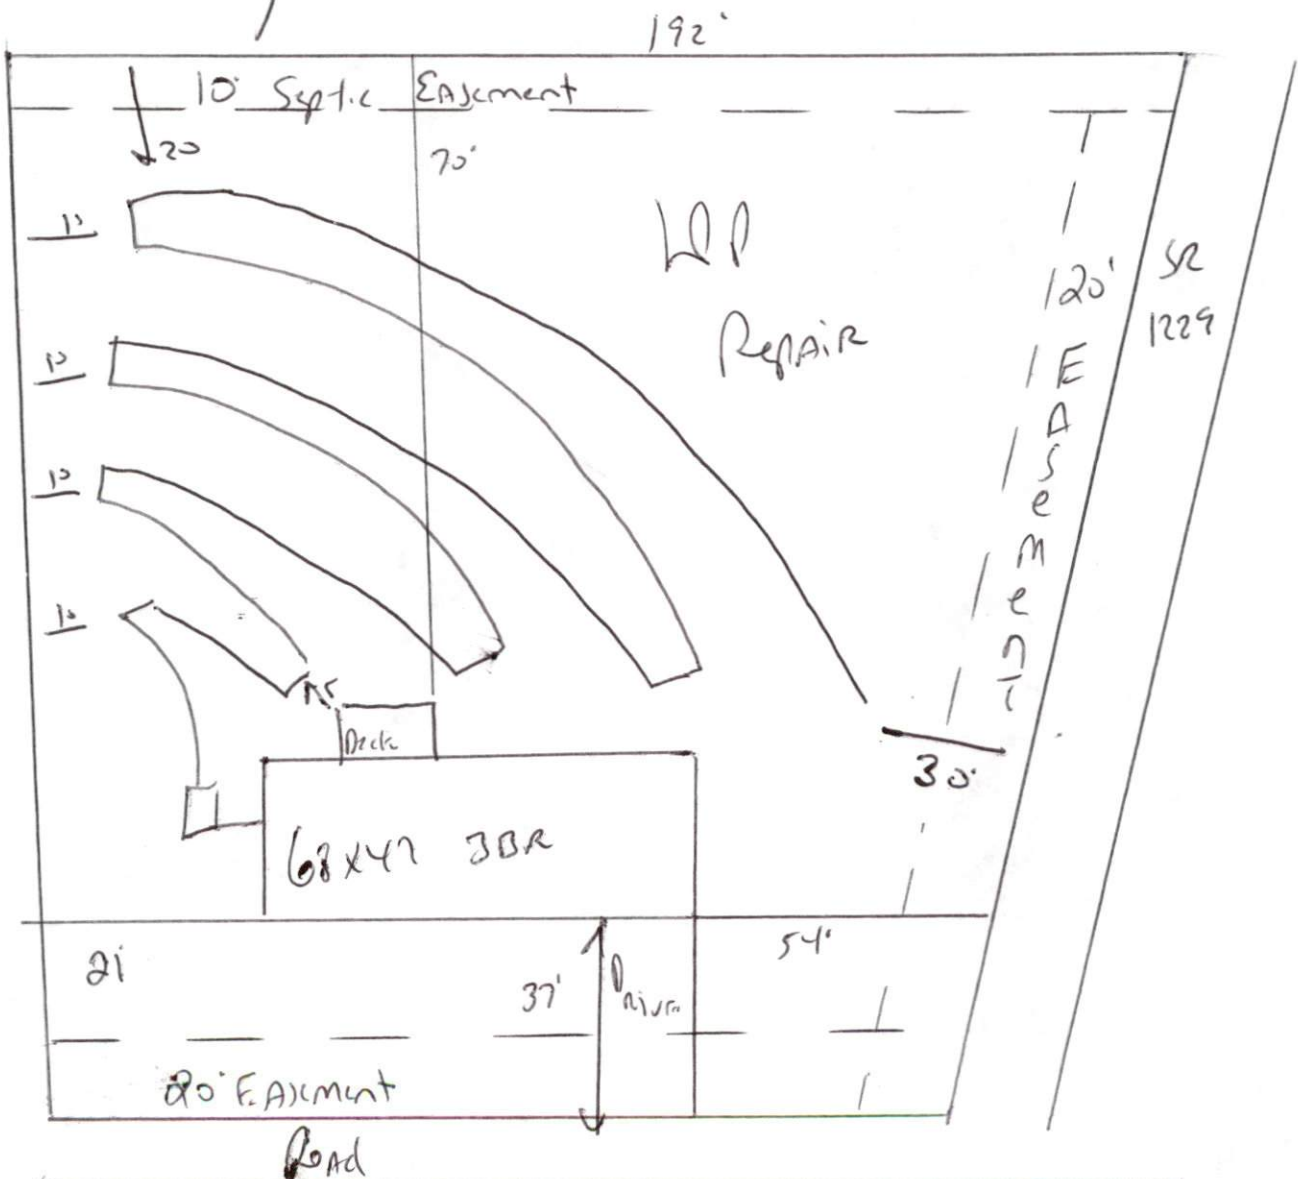

Meet onsite for final layout maintain all set backs
 STUB out Plumbing shallow, At ground level or higher where shown
 INSTALL 1x300 of 25% Reduction system at 18"