

HTE# 07-50017982R

Harford County Department of Public Health

24252

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Cumberland Homes PROPERTY LOCATION: 1115
SUBDIVISION: CRISTINA EST LOT # 253

NEW REPAIR EXPANSION Site Improvements required prior to Construction Authorization Issuance:

Type of Structure: SFD - 56x46 3BR

Proposed Wastewater System Type: Pump to 257- Red. Sys.

Projected Daily Flow: 360 GPD

Number of bedrooms: 3 Number of Occupants: 6 max

Basement Yes No

Pump Required: Yes No May be required based on final location and elevations of facilities

Type of Water Supply: Community Public Well Distance from well 50 feet Permit valid for: Five years

Permit conditions: Sheet on site maintain all set backs No expiration

Stub out Plumbing shall be at ground level or higher where shown and Pump may not be needed if 18 to 24" ditch depths can be maintained

Authorized State Agent: J. L. HARRIS Date: 7-27-07 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Cumberland Homes PROPERTY LOCATION: 1115
SUBDIVISION: CRISTINA EST LOT # 253

Facility Type: SFD-56x46-3BR New Expansion Repair

Basement? Yes No Basement Fixtures? Yes No

Type of Wastewater System** Pump to 257 Red. Sys. (Initial) Wastewater Flow: 360 GPD

(See note below, if applicable) 250 LF 1 LPP (Repair)

Installation Requirements/Conditions

Septic Tank Size 1000 gallons Exact length of each trench 1x180 feet Trench Spacing: 9 Feet on Center

Pump Tank Size 1000 gallons Trenches shall be installed on contour at a Soil Cover: 6 inches

Maximum Trench Depth of: 18-24 inches (Maximum soil cover shall not exceed 36" above the trench bottom)

(Trench bottoms shall be level to +/-1/4" in all directions)

Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: _____ inches below pipe

Conditions: _____ inches above pipe _____ inches total

**If applicable: *I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.*

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: J. L. HARRIS Date: 07-27-07 SEE ATTACHED SITE SKETCH

Construction Authorization Expiration Date: 07-27-2012

HTE# 07-50017982R

Permit # 24252

Harnett County Department of Public Health Site Sketch

ISSUED TO: Cumberland Home


PROPERTY LOCATOR: 1115

SUBDIVISION CRESTVIEW

LOT # 253

Authorized State Agent: J. W. [Signature]

Date: 07-27-07

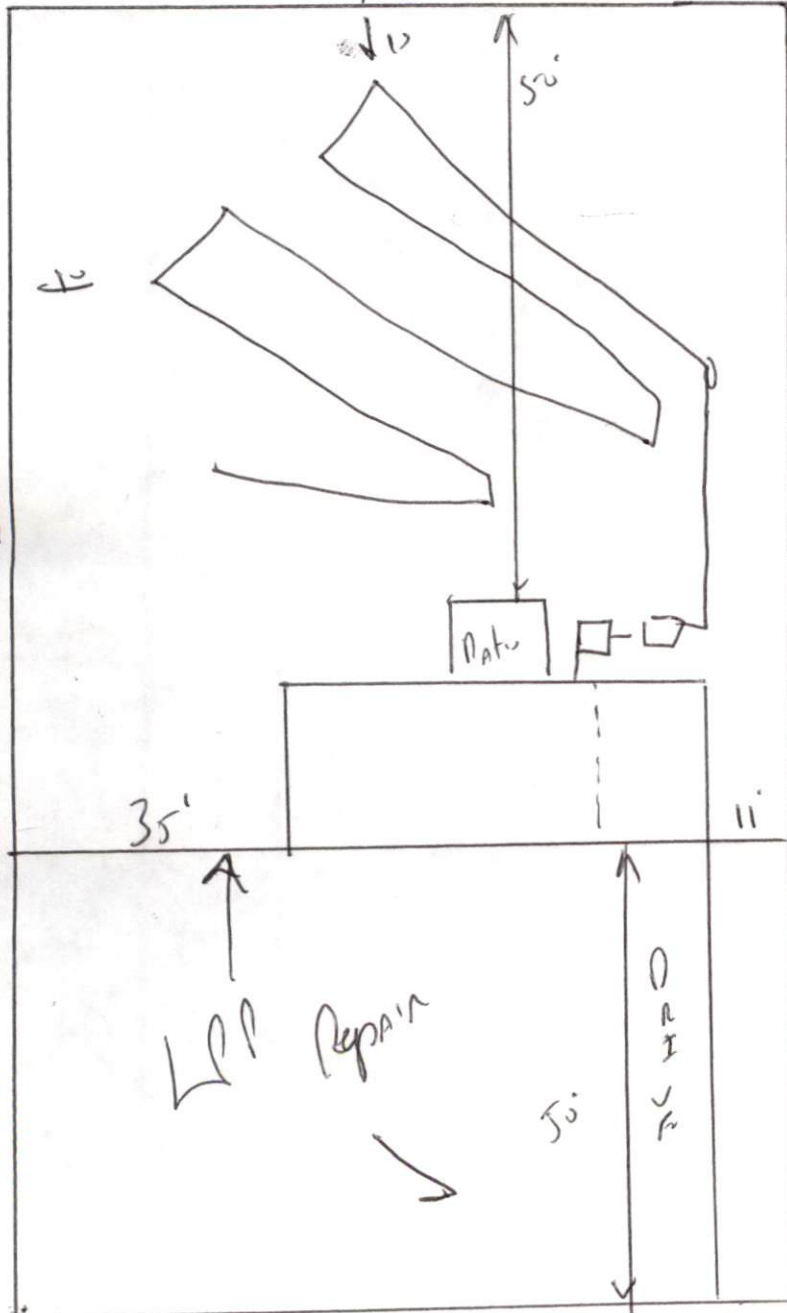

Mat onsite
 Maintain all set backs
 Stub out Plumbing shallow
 at ground level or higher
 where shown and Pump
 may not be required if
 18 to 24" Ditch Depth
 can be maintain

Install 1x180 of 25%
 Reduction system at
 18 to 24"

102

Road