

**Improvement Permit**

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: JBC Dev. PROPERTY LOCATION: 1115  
 SUBDIVISION: Crestview LOT # 209  
 NEW  REPAIR  EXPANSION   
 Type of Structure: SFD-56x36-3BR Site Improvements required prior to Construction Authorization Issuance:  
 Proposed Wastewater System Type: Pump to 25% Red system  
 Projected Daily Flow: 360 GPD  
 Number of bedrooms: 3 Number of Occupants: 6 max  
 Basement  Yes  No  
 Pump Required:  Yes  No  May be required based on final location and elevations of facilities  
 Type of Water Supply:  Community  Public  Well Distance from well 50 feet Permit valid for:  Five years  
 Permit conditions: Meet onsite maintain all set back  No expiration  
ST&B out plumbing shallow where shown & pump may not be required if  
18" Ditch depth can be maintained

Authorized State Agent: J. Wani Date: 08-21-07 SEE ATTACHED SITE SKETCH  
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

**Construction Authorization**

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: JBC Dev. PROPERTY LOCATION: 1115  
 SUBDIVISION: Crestview LOT # 209  
 Facility Type: SFD-56x36-3BR  New  Expansion  Repair  
 Basement?  Yes  No Basement Fixtures?  Yes  No  
 Type of Wastewater System\*\* Pump to 25% Red. 5779 (initial) Wastewater Flow: 360 GPD  
 (See note below, if applicable ) 480 LF of LPP (Repair)

**Installation Requirements/Conditions**

Septic Tank Size 1000 gallons Exact length of each trench 1x300 feet Trench Spacing: 9 Feet on Center  
 Pump Tank Size 1000 gallons Trenches shall be installed on contour at a Soil Cover: 6 inches  
 Maximum Trench Depth of: 18 inches (Maximum soil cover shall not exceed 36" above the trench bottom)  
 (Trench bottoms shall be level to +/-1/4" in all directions)  
 Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM Aggregate Depth: \_\_\_\_\_ inches below pipe  
 \_\_\_\_\_ inches above pipe  
 \_\_\_\_\_ inches total  
 Conditions: \_\_\_\_\_

\*\*If applicable: *I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.*

Owner/Legal Representative Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: J. Wani Date: 08-21-07 SEE ATTACHED SITE SKETCH  
 Construction Authorization Expiration Date: 08-21-12

HTE# 07-520 18091R

Permit # 24273

# Harnett County Department of Public Health Site Sketch

ISSUED TO: JBC Dev.


PROPERTY LOCATOR: 1115

SUBDIVISION: Clearview

LOT # 209

Authorized State Agent: J. W. M. I.

Date: 08-21-07

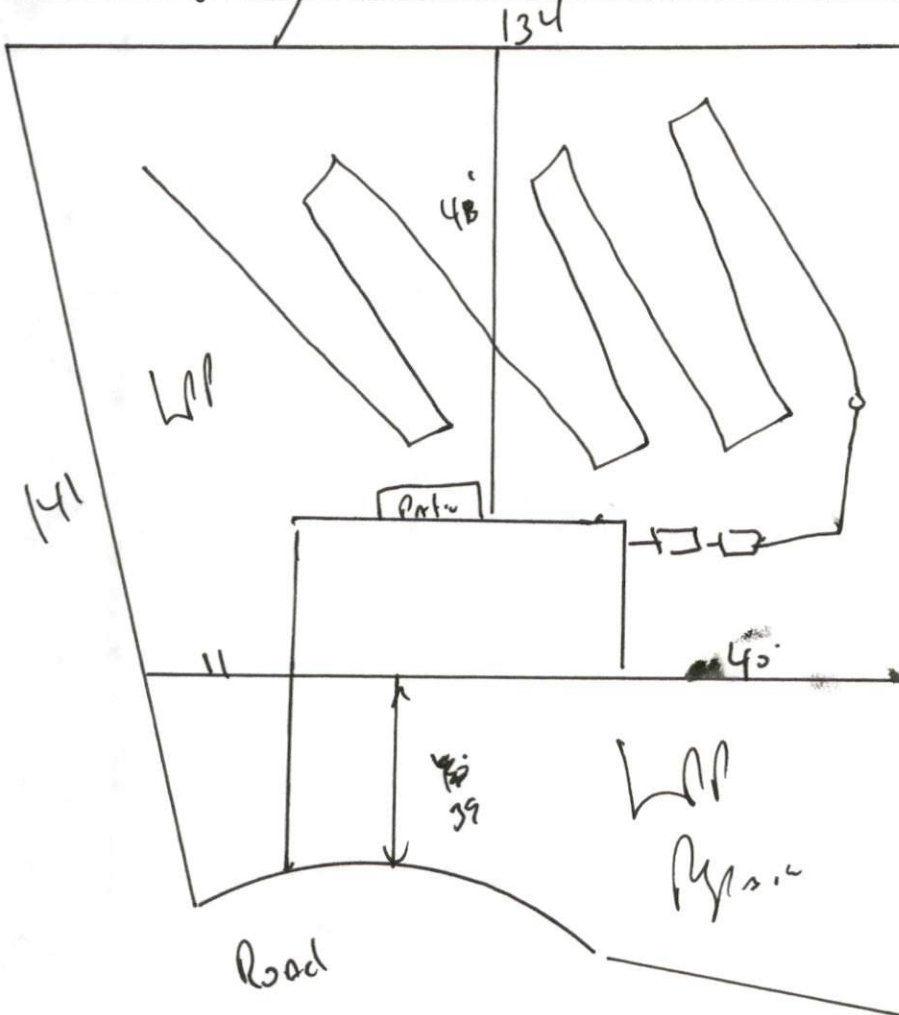

Meet onsite for  
Final layout  
If Plumbing is stubbed  
at shallow, at ground  
level or higher where  
shown a 18" ditch  
depth can be  
maintained then  
pump may not be needed  
Install 1x300 1  
ped. system.  
2 1/2% at 18"

