

HTE# 07-5-18571

Harnett County Department of Public Health 24338

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: RAM DEVELOPMENT PROPERTY LOCATION: _____
 SUBDIVISION CAROLINA OAKS LOT # 3
 NEW REPAIR EXPANSION
 Type of Structure: SFD (58'x50')
 Proposed Wastewater System Type: CONVENTIONAL
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well 100 feet
 Permit conditions: _____ Permit valid for: Five years
 No expiration

Authorized State Agent: [Signature] Date: 10/24/07 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: RAM DEVELOPMENT PROPERTY LOCATION: _____
 SUBDIVISION CAROLINA OAKS LOT # 3
 Facility Type: SFD (58'x50') New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** CONVENTIONAL (Initial) Wastewater Flow: _____ GPD
 (See note below, if applicable)
INNOVATIVE (Repair)

Installation Requirements/Conditions

1 TRENCH
 Septic Tank Size 1000 gallons Exact length of each trench 200 feet Trench Spacing: 9 Feet on Center
 Pump Tank Size _____ gallons Trenches shall be installed on contour at a Soil Cover: 18 inches
 Maximum Trench Depth of: 30 inches (Maximum soil cover shall not exceed
 (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom)
 in all directions)
 Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: 6 inches below pipe
2 inches above pipe
 Conditions: _____ 12 inches total

**If applicable: *I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.*
 Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: [Signature] Date: 10/24/07 SEE ATTACHED SITE SKETCH
 Construction Authorization Expiration Date: 10/24/12

HTE# 07-5-18371


Permit # 24338

Harnett County Department of Public Health Site Sketch

ISSUED TO: Ram Development PROPERTY LOCATOR: _____
SUBDIVISION CAROLINA OAKS LOT # 3

Authorized State Agent: [Signature] AS (OLIVER TOLKSDORF) Date: 10/24/07

* DRAINAGE EASEMENT
MEASURED TO 45'

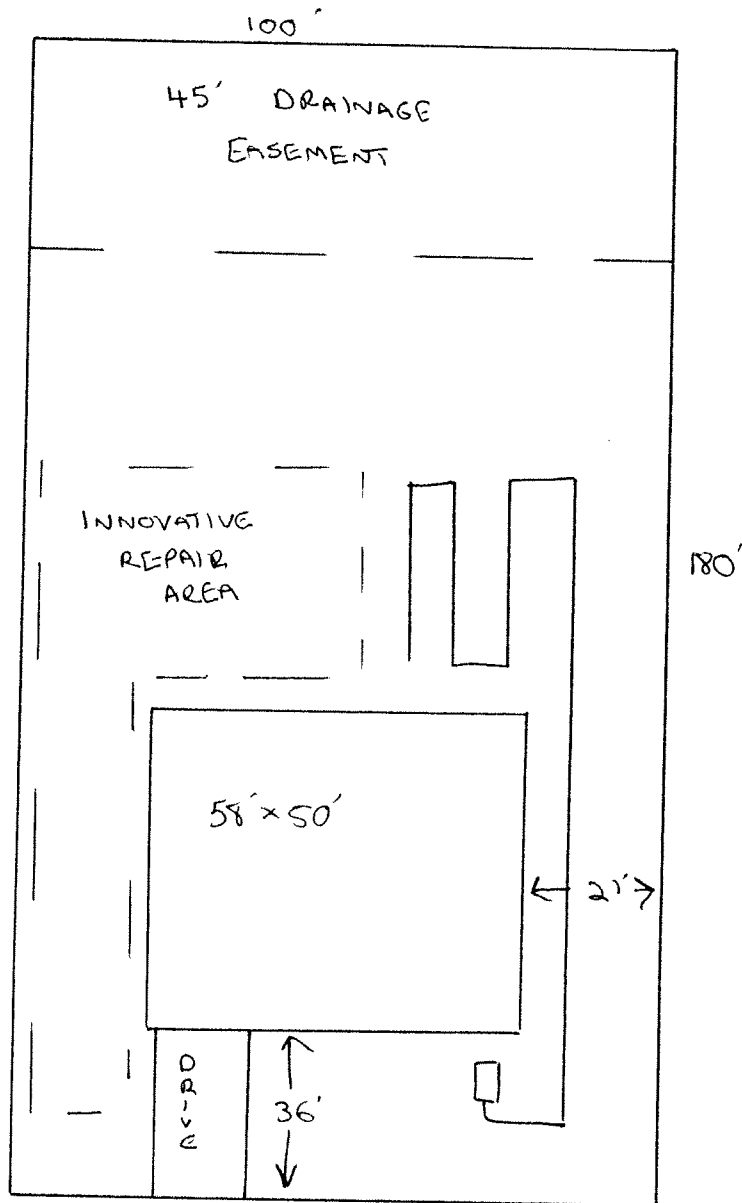

CAROLINA OAKS CIRCLE