

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Wynn Const. PROPERTY LOCATION: NC 27
 REPAIR EXPANSION SUBDIVISION: Tingen Pointe LOT # 17
 NEW Site Improvements required prior to Construction Authorization Issuance:
 Type of Structure: SFO-48x58-3BR
 Proposed Wastewater System Type: Pump to 25% Red. sys.
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max

Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well 50 feet Permit valid for: Five years
 Permit conditions: Meet on site for Final Layout maintain all set backs No expiration
STUB at Plumbing shall be at ground level or higher where shown, and if
18 to 24" Ditch Depth can be maintained then pump may not be needed

Authorized State Agent: Ju W. An Date: 10-19-07 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Wynn Const. PROPERTY LOCATION: NC 27
 SUBDIVISION: Tingen Pointe LOT # 17
 Facility Type: SFO-48x58-3BR New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** Pump to 25% Red. sys. (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable) 25% Reduction system (Repair)

Installation Requirements/Conditions

Septic Tank Size 1000 gallons Exact length of each trench 1x180 feet Trench Spacing: 9 Feet on Center
 Pump Tank Size 1000 gallons Trenches shall be installed on contour at a Soil Cover: 6 inches
 ↳ ZF Needed Maximum Trench Depth of: 18.24 inches (Maximum soil cover shall not exceed 36" above the trench bottom)
 in all directions)
 Pump Requirements: _____ ft. TDH vs. _____ GPM _____ inches below pipe
 Aggregate Depth: _____ inches above pipe
 Conditions: _____ inches total

**If applicable: *I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.*

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: Ju W. An Date: 10-19-07 SEE ATTACHED SITE SKETCH
 Construction Authorization Expiration Date: 10-19-2012

HTE# 07-500-18606

Permit # 24376

Harnett County Department of Public Health Site Sketch

ISSUED TO: Wynn Cont.


PROPERTY LOCATOR: NC 27

SUBDIVISION: Tinsler Pointe

LOT # 17

Authorized State Agent: Joe W. [Signature]

Date: 10-15-07

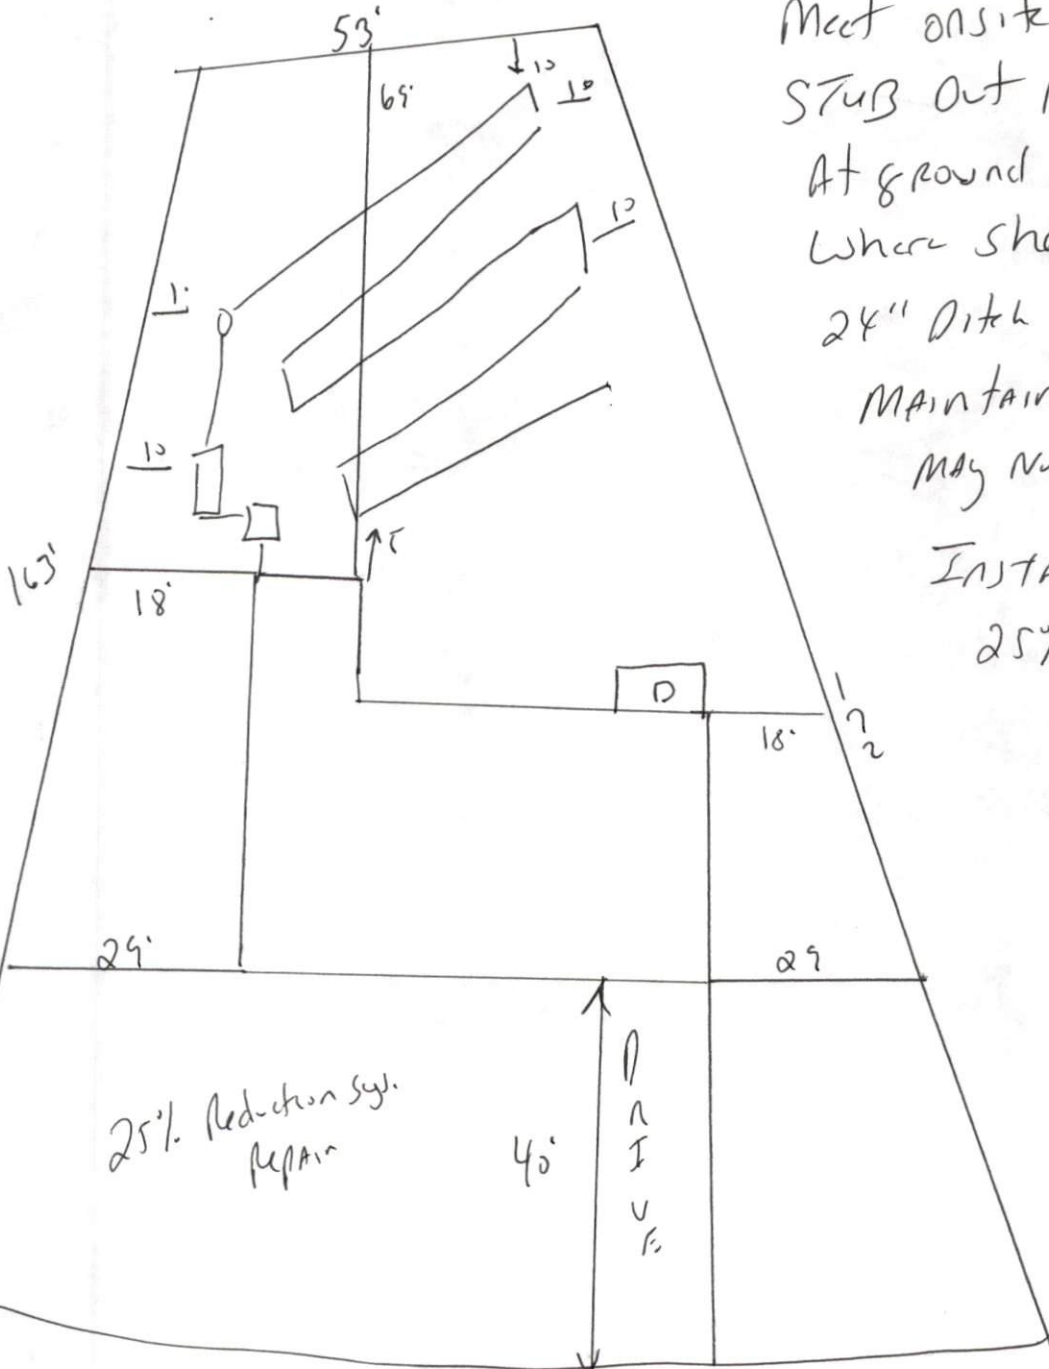

Meet onsite for Final Layout
 STUB OUT Plumbing shallow,
 At ground level or higher
 Where shown and if 18 to
 24" Ditch Depth can be
 MAINTAINED Then pump
 may not be needed.

INSTALL 1x180 +
 25% Reduction system
 At 18 to 24"
 Deep.

Road