

### Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Wynn Const. PROPERTY LOCATION: NC27  
SUBDIVISION Tingen Pointe LOT # 21  
NEW  REPAIR  EXPANSION   
Type of Structure: SFO - 47x40 3BR Site Improvements required prior to Construction Authorization Issuance:  
Proposed Wastewater System Type: Pump to 25% Red. sys.  
Projected Daily Flow: 360 GPD  
Number of bedrooms: 3 Number of Occupants: 6 max  
Basement  Yes  No

Pump Required:  Yes  No  May be required based on final location and elevations of facilities  
Type of Water Supply:  Community  Public  Well Distance from well 50 feet Permit valid for:  Five years  
Permit conditions: Meet onsite for Final Layout maintain all set Backs  No expiration  
STUB OUT PLUMBING SHALLOW, AT GROUND LEVEL or higher Where Shown  
And if 18" Ditch Depth can be maintained then Pump may not be Required

Authorized State Agent: Ja Waters Date: 10-16-07 SEE ATTACHED SITE SKETCH  
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

### Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Wynn Const. PROPERTY LOCATION: NC27  
SUBDIVISION Tingen Pointe LOT # 21  
Facility Type: SFO- 47x40 3BR  New  Expansion  Repair  
Basement?  Yes  No Basement Fixtures?  Yes  No  
Type of Wastewater System\*\* Pump to 25% Red. Sys (Initial) Wastewater Flow: 360 GPD  
(See note below, if applicable  Pump to 25% Red. system (Repair))

#### Installation Requirements/Conditions

Septic Tank Size 1000 gallons Exact length of each trench 1x180 feet Trench Spacing: 9 Feet on Center  
Pump Tank Size 1000 gallons Trenches shall be installed on contour at a Soil Cover: 6 inches  
Maximum Trench Depth of: 18.24 inches (Maximum soil cover shall not exceed 36" above the trench bottom)  
(Trench bottoms shall be level to +/-1/4" in all directions)  
Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM Aggregate Depth: \_\_\_\_\_ inches below pipe  
Conditions: \_\_\_\_\_ Aggregate Depth: \_\_\_\_\_ inches above pipe  
\_\_\_\_\_ inches total

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: Ja Waters Date: 10-16-07 SEE ATTACHED SITE SKETCH  
Construction Authorization Expiration Date: 10-16-2012

HTE# 07-50018608

Permit # 24370

# Harnett County Department of Public Health Site Sketch

ISSUED TO: Wynn Cont.


PROPERTY LOCATOR: NC 27

SUBDIVISION: Tingen Pointe

LOT # 21

Authorized State Agent: Joe Waters

Date: 10-16-07

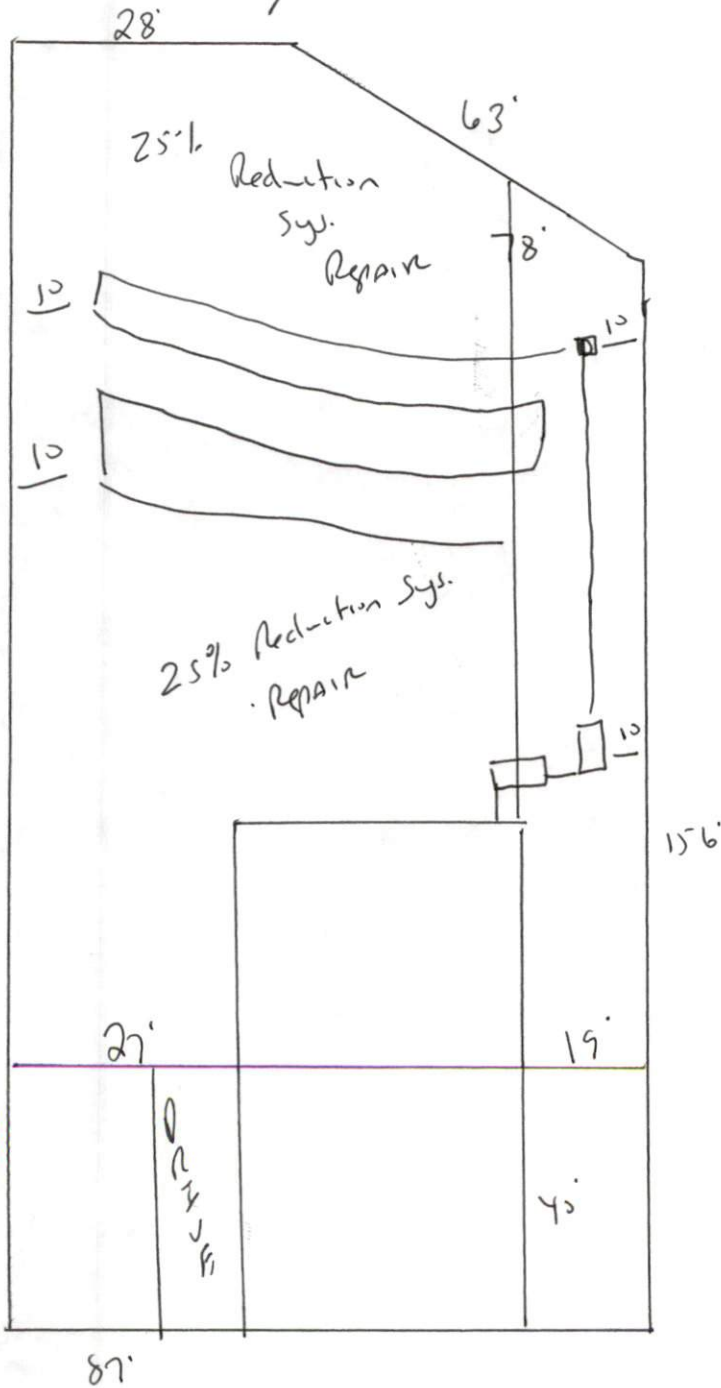

Meet onsite for Final Layout  
Maintain all setbacks

STUB out Plumbing shallow  
At ground level or higher where  
shown and if 18" Ditch depth  
can be maintained then  
Pump MAY not be needed

Install 1x180 of 25%  
Reduction system at 18 to  
24" Deep.