

HTE# 07-500 18611

Harris County Department of Public Health

23554

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Wynn Const.

PROPERTY LOCATION: NC27

SUBDIVISION Tingen Pointe

LOT # 28

NEW REPAIR EXPANSION

Site Improvements required prior to Construction Authorization Issuance:

Type of Structure: SFD- 65x39 3BR

Proposed Wastewater System Type: 25% Reduction system

Projected Daily Flow: 360 GPD

Number of bedrooms: 3 Number of Occupants: 6 max

Basement Yes No

Pump Required: Yes No May be required based on final location and elevations of facilities

Type of Water Supply: Community Public Well Distance from well 50 feet

Permit valid for: Five years

Permit conditions: STUB Out Plumbing Shallow, At ground level or higher where No expiration

Shown, maintain all set BACK, meet onsite for Final Layout. Place clear fill in Area shown on permit.

Authorized State Agent: [Signature]

Date: 11-07-07

SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Wynn Const.

PROPERTY LOCATION: NC27

SUBDIVISION Tingen Pointe

LOT # 28

Facility Type: SFD- 65x39 3BR New Expansion Repair

Basement? Yes No Basement Fixtures? Yes No

Type of Wastewater System** 25% Reduction sys. (Initial)

Wastewater Flow: 360 GPD

(See note below, if applicable)

25% Reduction system (Repair)

Installation Requirements/Conditions

Septic Tank Size 1000 gallons

Exact length of each trench 1x150 feet

Trench Spacing: 9 Feet on Center

Pump Tank Size _____ gallons

Trenches shall be installed on contour at a

Soil Cover: 6 inches

Maximum Trench Depth of: 18 ~~24~~ inches

(Maximum soil cover shall not exceed

(Trench bottoms shall be level to +1-1/4"

36" above the trench bottom)

in all directions)

Pump Requirements: _____ ft. TDH vs. _____ GPM

Aggregate Depth: _____ inches below pipe

Conditions: _____

Aggregate Depth: _____ inches above pipe

Aggregate Depth: _____ inches total

**If applicable: *I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.*

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature]

Date: 11-7-07

Construction Authorization Expiration Date: 11-07-2012

HTE# 07-500-18611

Permit # 23554

Harnett County Department of Public Health Site Sketch

ISSUED TO: Wynn Const.


PROPERTY LOCATOR: Nc27

SUBDIVISION TWGen Pointe

LOT # 28

Authorized State Agent: Joe W. [Signature]

Date: 11-07-07

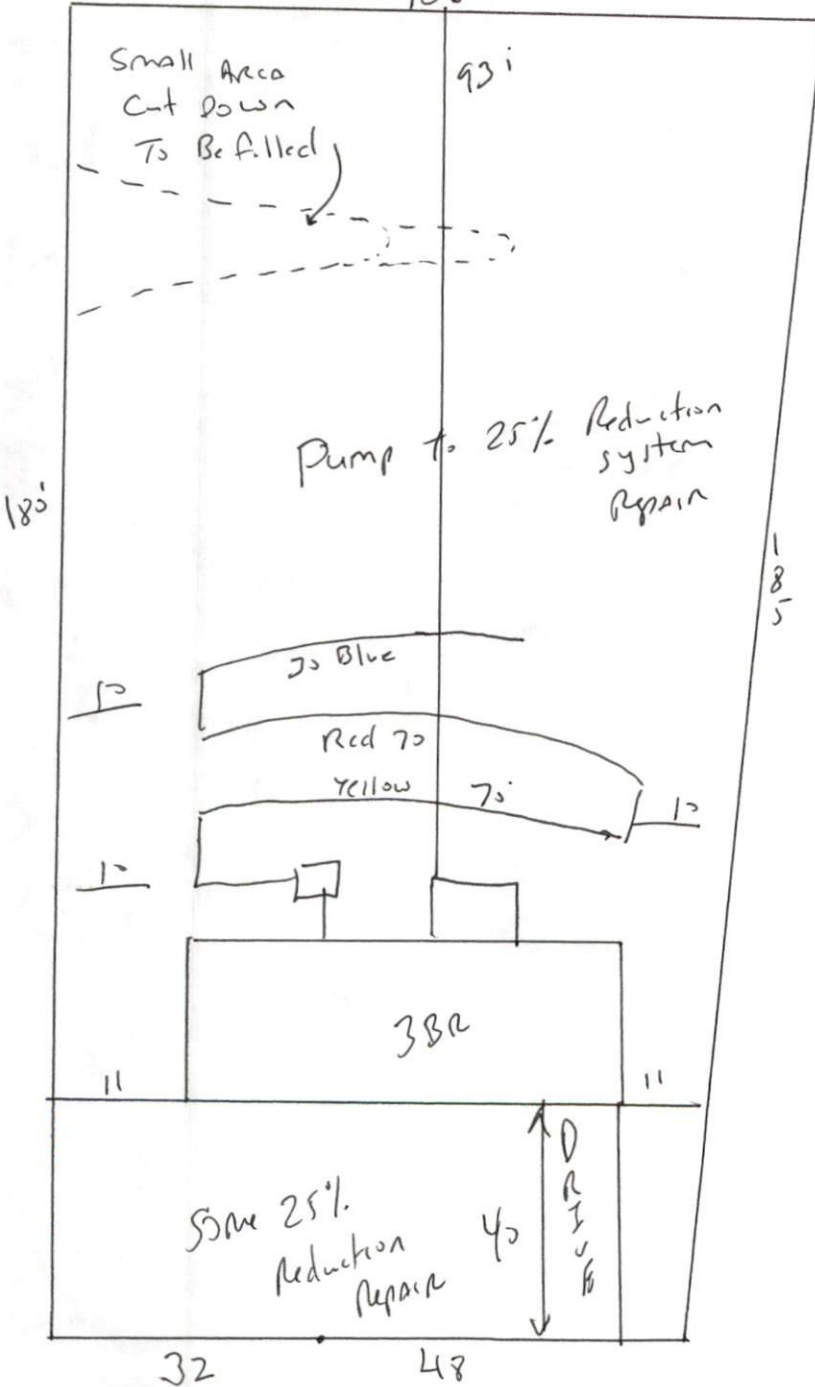

STUB out Plumbing shallow, at ground level or higher
 maintain all setbacks
 Being in clear fill to fill in cut down area
 meet onsite
 INSTALL 1x150 + 25% Reduction system at 18%
 24"