

GOODMAN MANUFACTURING COMPANY, L.P.
5151 SAN FELIPE ST., SUITE 500, HOUSTON, TX 77056

MODEL GSZ140481KF SERIAL NO. 2002319857
A.C. VOLTS 208-230 PHASE 1 HERTZ 60
VOLTAGE RANGE MIN. 197 MAX. 253
MAX. FUSE AMPS OR MAX. CIRCUIT BREAKER (TIME DELAY FUSE OR HACR CIRCUIT BREAKER REQUIRED) 40
MIN. CIRCUIT AMPS 24.4
FAN MOTOR FLA 1.1 H.P. 1/4
COMPRESSOR RLA 18.5 LRA 134
SHORT-CIRCUIT CURRENT: 5KA RMS SYMMETRICAL, 60KV MAXIMUM
MAX. WORKING PRESSURE PSIG 157
FACTORY CHARGE OZ. R418A
FACTORY TEST PRESSURE PSIG LOW 240 HIGH 416



Intertek
500-4994



WARNING

DISCONNECT ALL ELECTRICAL POWER BEFORE SERVICE



ADVERTISSEMENT

COUPEZ TOUT LE COURANT ELECTRIQUE AVANT TOUT TRAVAIL DE REPARATION



ADVERTENCIA

DESCONECTE TODAS LAS FUENTES DE ENERGIA ELECTRICA ANTES DE MANEJARLO O SERVICIARLO

USE COPPER CONDUCTORS ONLY
THIS EQUIPMENT IS NOT SUITABLE FOR OUTDOOR USE



PART NO. 80888818
58767





















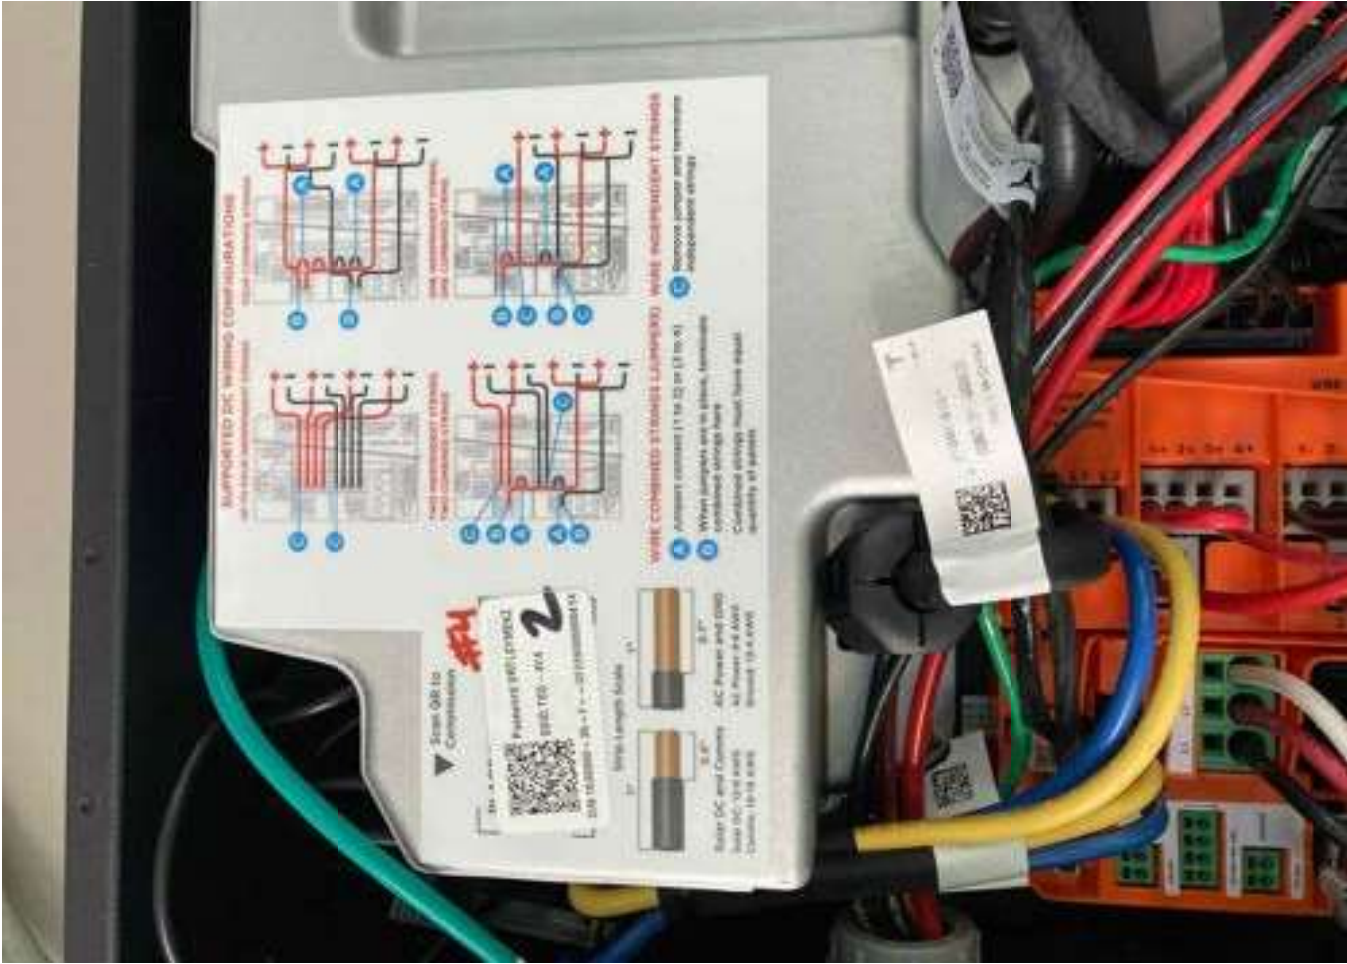






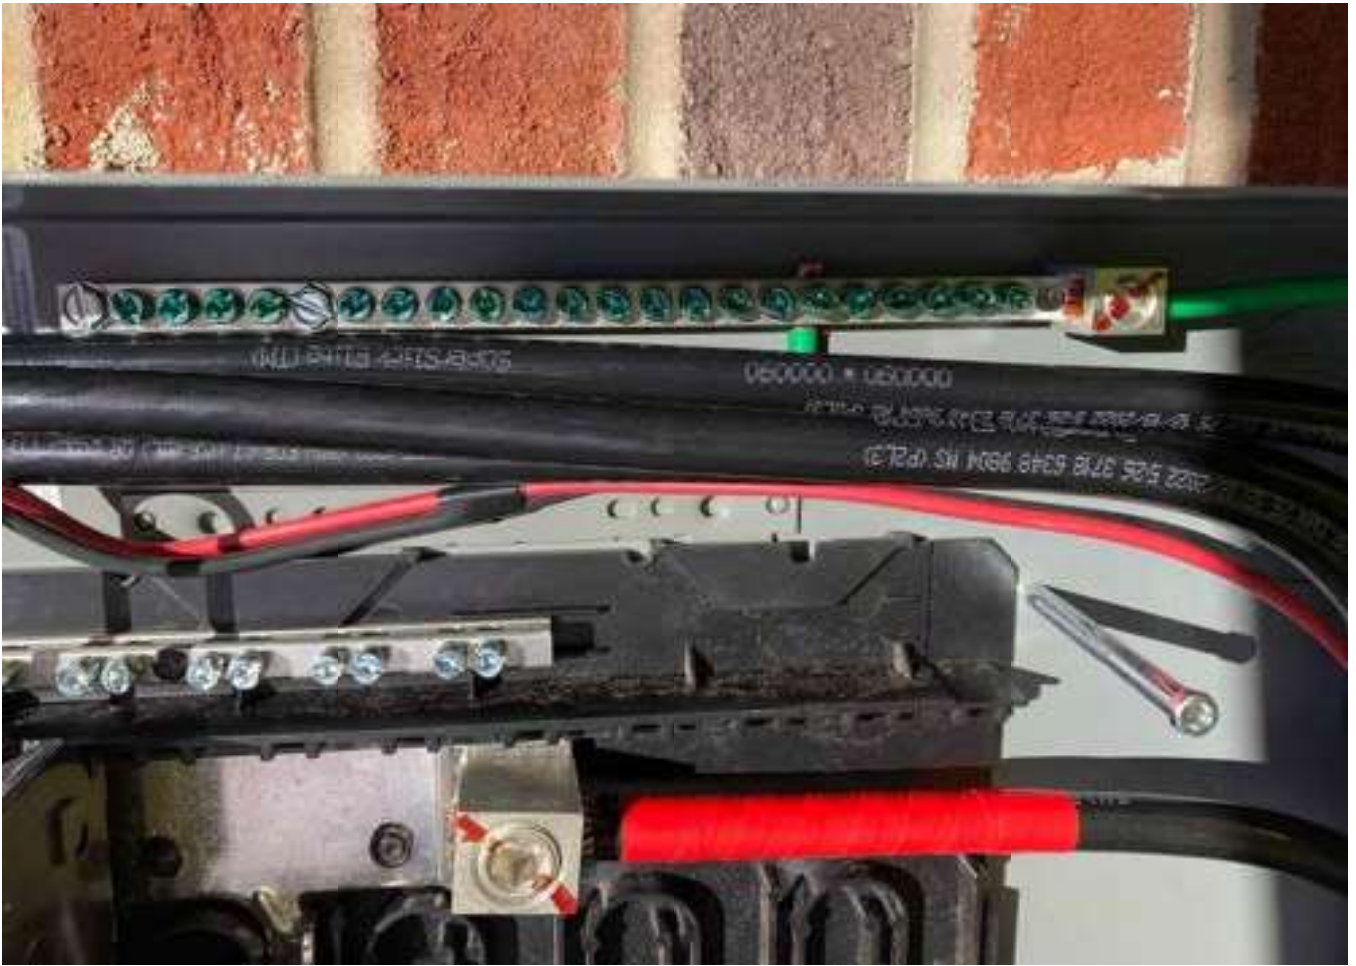



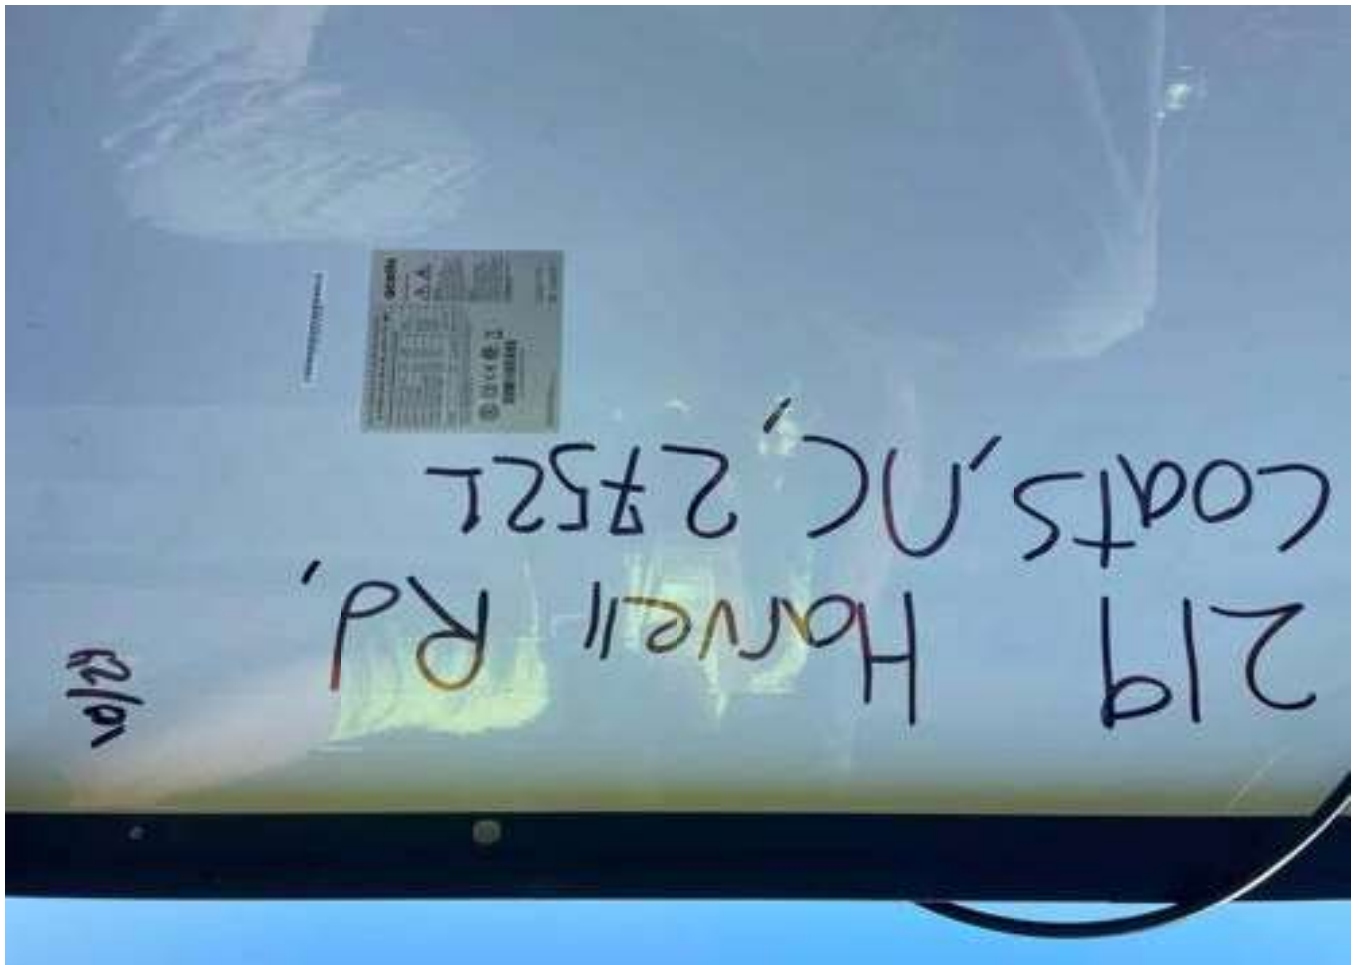





201223356620200895


We aim for a greener tomorrow with completely clean energy solutions

Q-PEAK DUO BLK ML-G10+ / TS 405

PERFORMANCE AT STANDARD TEST CONDITIONS*

Nominal Power* (P _{nom})	P _{nom}	[W]	405
Short circuit current*	I _{sc}	[A]	11.17
Open circuit voltage*	V _{oc}	[V]	45.34
Current at maximum power	I _{mp}	[A]	10.83
Voltage at maximum power	V _{mp}	[V]	37.39
Maximum system voltage	V _{sys}	[V]	1000 (UL)
Weight	M	[kg / lbs]	23.5 / 51.8


* Measurement tolerances: P_{nom} ± 3%, I_{sc}, V_{oc} ± 3% at STC: 1000 W/m², 25 ± 3 °C, AM 1.5 according to IEC 60904-3. Data given are rated (nominal) values IEC 61215-2:2016, SEC 61730:2016.



201223356620200895



Assembled in USA



DANGER
 Risk of electric shock!
 DO NOT connect or disconnect plug contacts while system is under load current. Refer to the Installer and Operation Manual before installing, operating or servicing this unit.

DANGER
 Risque de choc électrique!
 NE PAS connecter ou déconnecter les contacts branchés à l'installation sans interruption de l'alimentation électrique. Consulter le manuel d'installation et d'utilisation avant installation, utilisation et entretien de produit.

Fire Rating: Class C / Type 3
 Fuse Rating: 20A

U.S. Patent No. 8,893,213
 (Solar Cells)

EMAIL: info@qcells.com
 WEB: www.qcells.com

Harsha Q CELLS USA, Inc.
 300 Nexus Drive, Dalton, GA 30721, USA