

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Blackwell Homes PROPERTY LOCATION: 1125
 NEW REPAIR EXPANSION SUBDIVISION: Wood Shire
 Type of Structure: SFD 46x55-3BR Site Improvements required prior to Construction Authorizati
 Proposed Wastewater System Type: Pump to 25% Reduction sys.
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 max Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well 100 feet Permit valid for:
 Permit conditions: Meet onsite for Final layout maintain all set Back
Must sleeve supply line when crossing under drive way. maintain all set B

Authorized State Agent: _____ Date: _____ SEE ATTACH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in mee site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to comp the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall with the attached system layout.

ISSUED TO: Blackwell Homes PROPERTY LOCATION: 1125
 SUBDIVISION: Wood Shire
 Facility Type: SFD 46x55-3BR New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% Reduction system (Initial) Wastewater Flow: 3
 (See note below, if applicable)
Panel Block (Repair)

Installation Requirements/Conditions

Septic Tank Size <u>1000</u> gallons	Number of trenches <u>4</u>	Trench Spacing: <u>9</u> Feet
Pump Tank Size <u>1000</u> gallons	Exact length of each trench <u>50</u> feet	Soil Cover: <u>6</u> inch
	Trenches shall be installed on contour at a	(Maximum soil cover shall not
	Maximum Trench Depth of: <u>18.24</u> inches	36" above the trench bottom)
	(Trench bottoms shall be level to +/-1/4" in all directions)	

Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: _____

Conditions: _____

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this,

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in owners! Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTA

Authorized State Agent: [Signature] Date: 11-12-08
Construction Authorization Expiration Date: 11-12-2013

HTE# 50019048RRRR

Permit # 25099

Harnett County Department of Public Health Site Sketch

ISSUED TO: Blackwell Homes


PROPERTY LOCATOR: 1125

SUBDIVISION Wood Shire

Authorized State Agent: Ju LAR

Date: 11-12-08

SONORA DRIVE 99

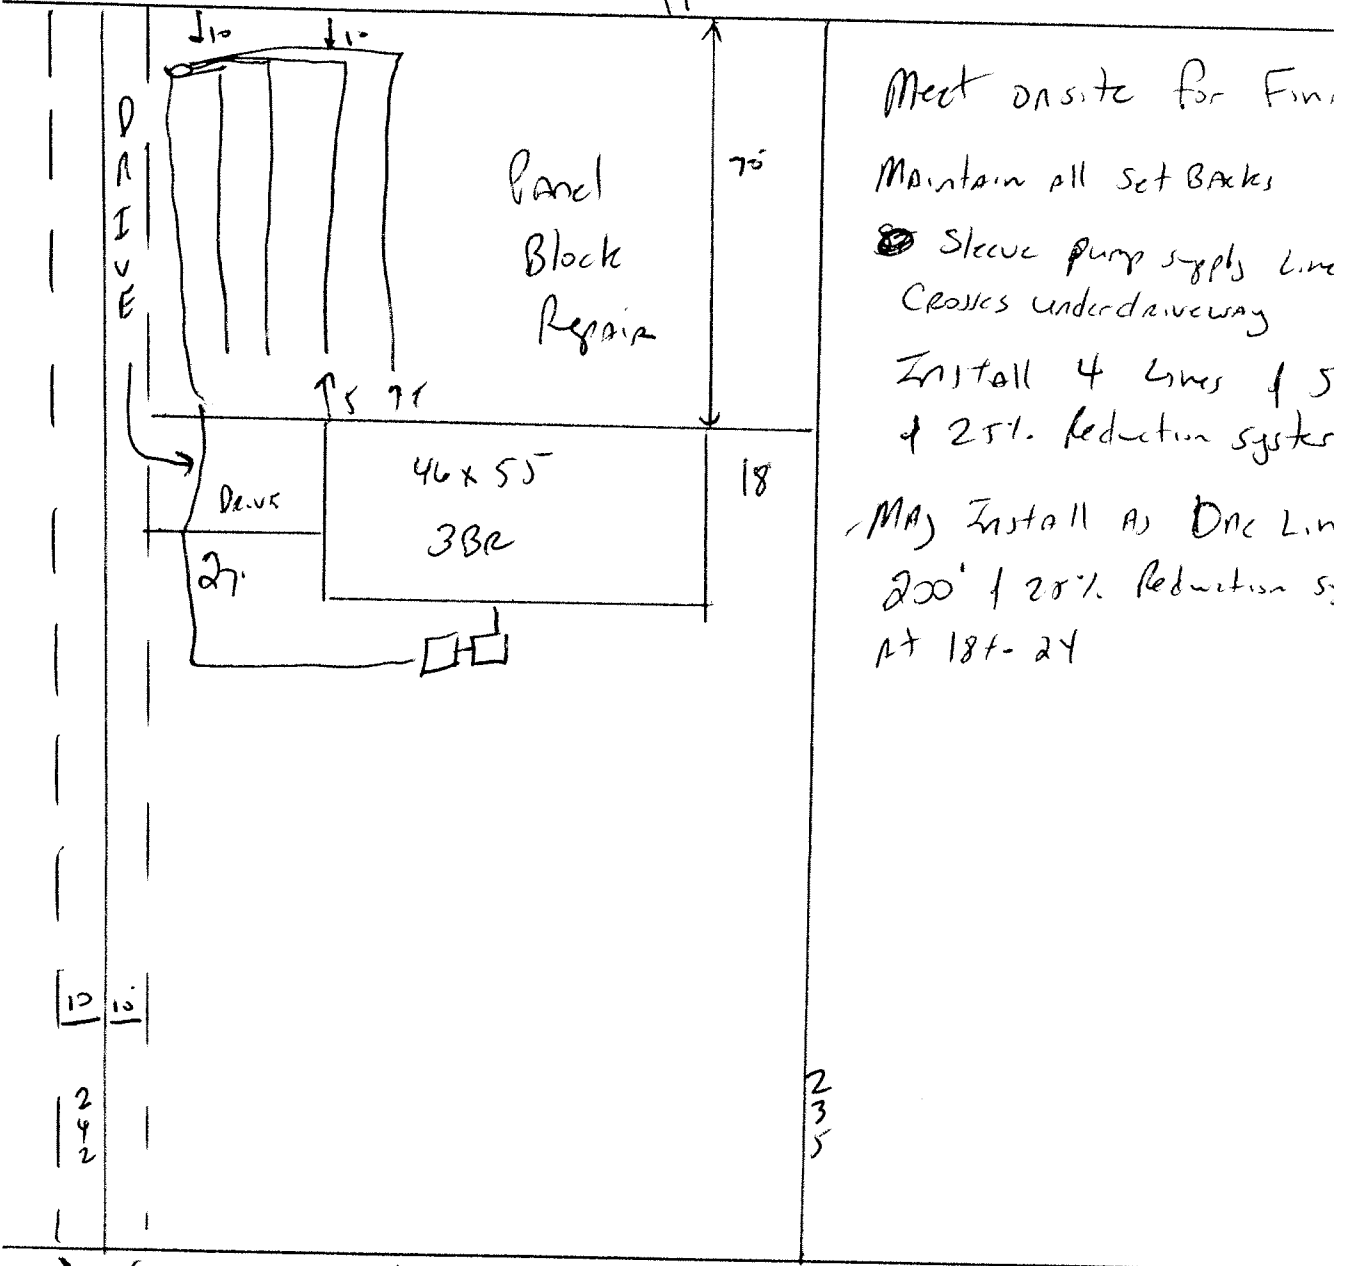

Meet onsite for Final
 Maintain all Set Backs
 ⓧ Sleeve pump supply line
 crosses under driveway
 Install 4 Lines of 5
 & 25% Reduction system
 - MAY Install As One Lin
 200' of 25% Reduction s:
 AT 18'-24'

2 - FAX ment

SR 1125