

HTE# 08-500-19311R

Harrison County Department of Public Health

24867

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: CAUINNESS LAND
PROPERTY LOCATION: 1125
SUBDIVISION: Woodshire
LOT #: 225
Type of Structure: SFD-44x54-3BR
Proposed Wastewater System Type: Pump to 25% Reduction system
Projected Daily Flow: 360 GPD
Number of bedrooms: 3
Number of Occupants: 6 max
Basement: No
Pump Required: No
Type of Water Supply: Well
Distance from well: 50 feet
Permit valid for: Five years
Permit conditions: Meet code for final layout MAINTAIN ALL SET BACKS
STUB out plumbing shallow, at ground level or higher where shown and pump may not be required.

Authorized State Agent: J. L. ... Date: 06-24-08 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: CAUINNESS LAND
PROPERTY LOCATION: 1125
SUBDIVISION: Woodshire
LOT #: 225
Facility Type: SFD-44x54-3BR New
Basement? No
Type of Wastewater System: Pump to 25% Reduction system
(Initial) Wastewater Flow: GPD
25% Reduction system (Repair)

Installation Requirements/Conditions
Septic Tank Size: 1000 gallons
Pump Tank Size: 1000 gallons
Number of trenches: 1
Exact length of each trench: 150 feet
Trench Spacing: 9 Feet on Center
Soil Cover: 6 inches
Maximum Trench Depth: 18.24 inches
Pump Requirements: ft. TDH vs. GPM
Aggregate Depth: inches below pipe, inches above pipe, inches total

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.
Owner/Legal Representative Signature: Date:

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: J. L. ... Date: 06-24-08
Construction Authorization Expiration Date: 06-24-2013

HTE# 08-500-19311R

Permit # 24867

Harnett County Department of Public Health Site Sketch

ISSUED TO: CAUVNESS Land

PROPERTY LOCATOR: 1125

SUBDIVISION Woodshire


LOT # 225

Authorized State Agent: Ju WARS

Date: 06-24-08

SE1125

5' Streetscape Buffer

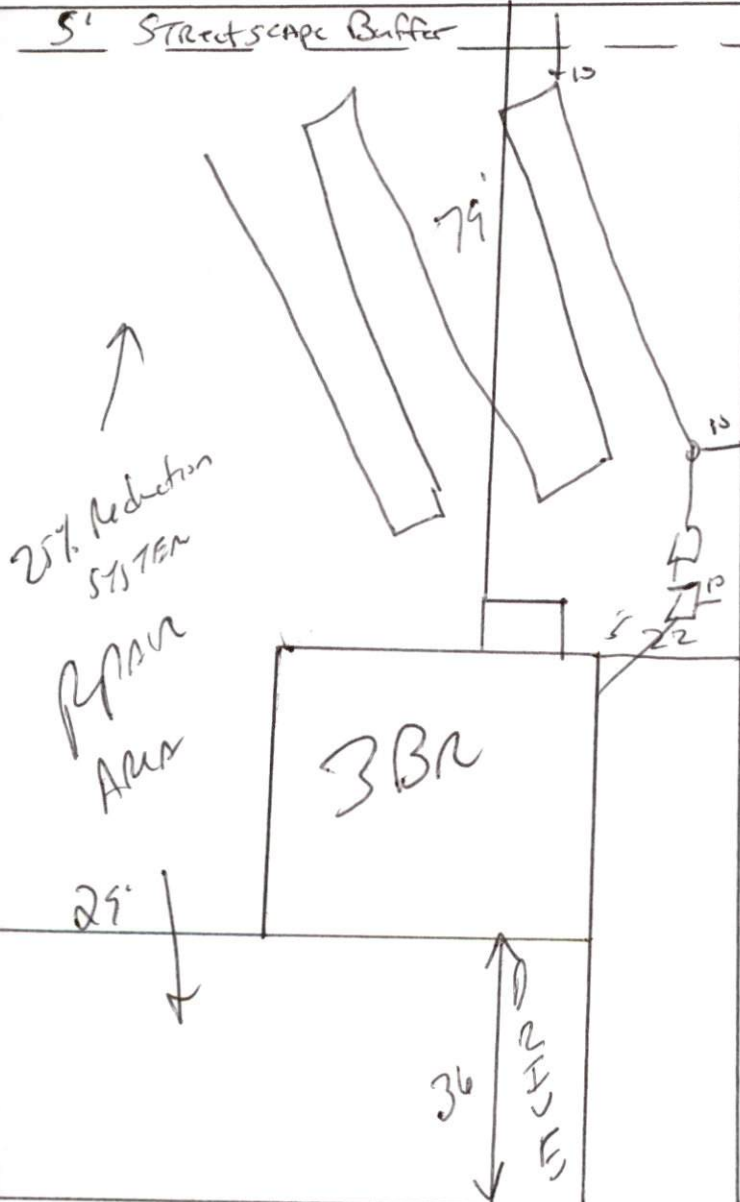

Meet onsite for Final Layout

MAINTAIN ALL SET BACKS
STUB OUT PLUMBING
SHALLOW AT GROUND LEVEL
OR HIGHER WHERE SHOWN.

INSTALL 150' x 25%
REDUCTION SYSTEM AT
18 x 24"

SNORA