

HTE# 08-500-19878RR

# Harnett County Department of Public Health

24873

## Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: STANCI Builders PROPERTY LOCATION: 1141  
 SUBDIVISION: Patton's Point II LOT # 121  
 NEW  REPAIR  EXPANSION   
 Type of Structure: SFD-40x60-3BR  
 Proposed Wastewater System Type: 25% Reduction system  
 Projected Daily Flow: 360 GPD  
 Number of bedrooms: 3 Number of Occupants: 6 max  
 Basement  Yes  No  
 Pump Required:  Yes  No  May be required based on final location and elevations of facilities  
 Type of Water Supply:  Community  Public  Well Distance from well 50 feet Permit valid for:  Five years  
 No expiration  
 Permit conditions: Meet on site for final layout start plumbing  
Shallow at ground level or higher where shown keep septic system  
50' from storm pond  
 Authorized State Agent: [Signature] Date: 06-25-08 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

## Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: STANCI Builders PROPERTY LOCATION: 1141  
 SUBDIVISION: Patton's Point LOT # 121  
 Facility Type: SFD-40x60-3BR  New  Expansion  Repair  
 Basement?  Yes  No Basement Fixtures?  Yes  No  
 Type of Wastewater System\*\* 25% Reduction system (Initial) Wastewater Flow: 360 GPD  
 (See note below, if applicable)  25% Reduction system (Repair)

**Installation Requirements/Conditions**  
 Septic Tank Size 1000 gallons  
 Pump Tank Size \_\_\_\_\_ gallons  
 Number of trenches 1  
 Exact length of each trench 150 feet  
 Trenches shall be installed on contour at a  
 Maximum Trench Depth of: 18.24 inches  
 (Trench bottoms shall be level to +/- 1/4"  
 in all directions)  
 Trench Spacing: 9 Feet on Center  
 Soil Cover: 6 inches  
 (Maximum soil cover shall not exceed  
 36" above the trench bottom)  
 Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM  
 Aggregate Depth: \_\_\_\_\_ inches below pipe  
 \_\_\_\_\_ inches above pipe  
 \_\_\_\_\_ inches total  
 Conditions: \_\_\_\_\_

**\*\*If applicable:** I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 06-25-08  
 Construction Authorization Expiration Date: 06-25-2013

HTE# 08500-19878RN

Permit # 24873


# Harnett County Department of Public Health Site Sketch

ISSUED TO: STANvil Builders

PROPERTY LOCATOR: 1141  
SUBDIVISION: Patton Point II LOT # 121

Authorized State Agent: [Signature]

Date: 062508

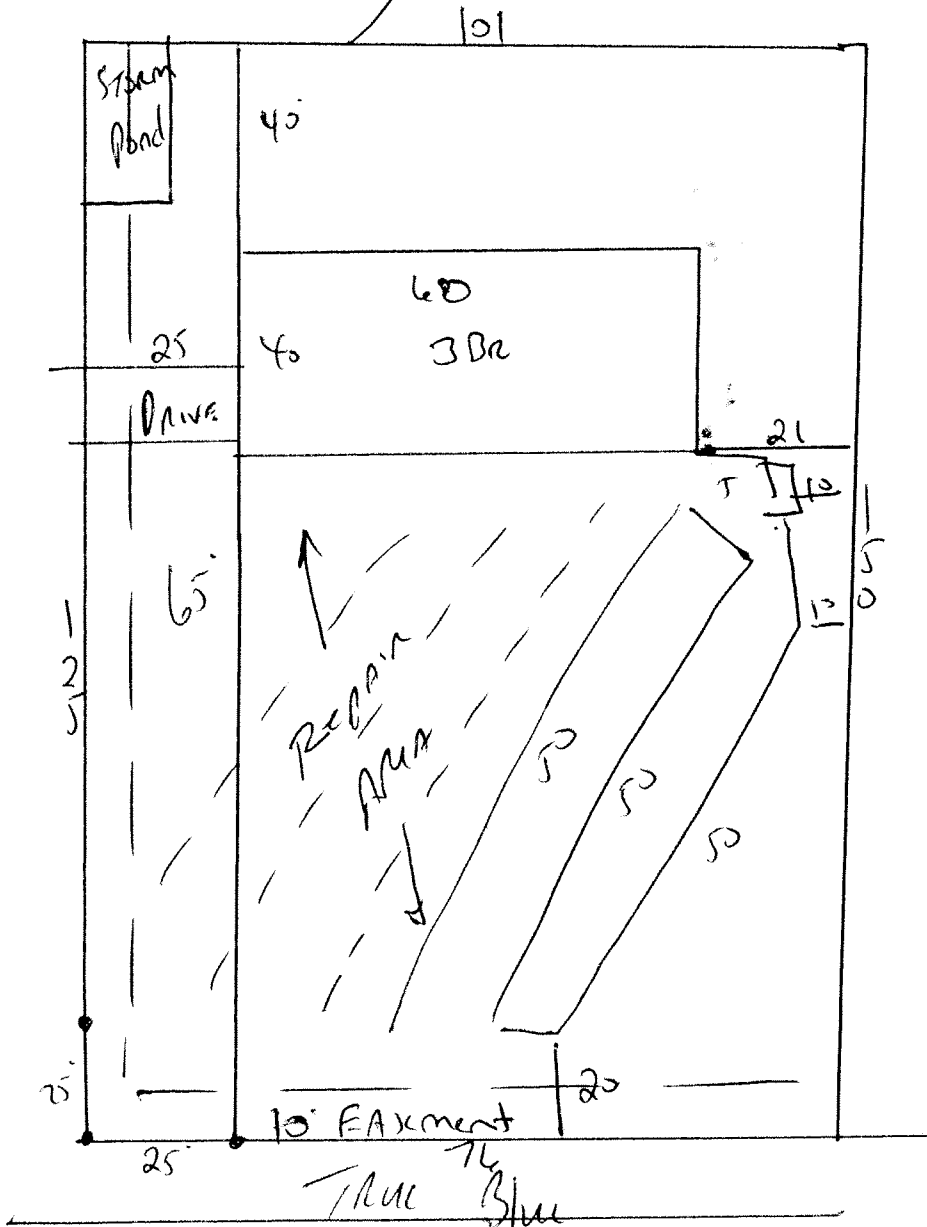

Keep septic system  
 50' from storm  
 Pond  
 STUB out Plumbing  
 shallow AT  
 ground level or  
 higher where shown  
 MAINTAIN ALL set BACK,  
 meet on site for Final  
 layout  
 INSTALL 150' of 25%  
 Reduction system  
 AT 18 to 24" Deep.