

HTE# 07-500-19884R

# Harnett County Department of Public Health

25373

## Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Stanc. Builders PROPERTY LOCATION: Tinzen Rd  
 SUBDIVISION: Patton's Point LOT # 17r  
 NEW  REPAIR  EXPANSION   
 Type of Structure: SFD- 40x60- 3BR  
 Proposed Wastewater System Type: 25% Reduction system  
 Projected Daily Flow: 360 GPD  
 Number of bedrooms: 3 Number of Occupants: 6 max  
 Basement  Yes  No  
 Pump Required:  Yes  No  May be required based on final location and elevations of facilities  
 Type of Water Supply:  Community  Public  Well Distance from well 100 feet Permit valid for:  Five years  
 Permit conditions: Meet on site for Final Layout MAINTAIN ALL SETBACKS  No expiration  
STUD out Plumbing shall be at ground level or higher where shown

Authorized State Agent: [Signature] Date: 4-19-09 SEE ATTACHED SITE SKETCH  
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

## Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Stanc. Builders PROPERTY LOCATION: Tinzen Road  
 SUBDIVISION: Patton's Point LOT # 17r  
 Facility Type: SFD- 40x60- 3BR  New  Expansion  Repair  
 Basement?  Yes  No Basement Fixtures?  Yes  No  
 Type of Wastewater System\*\* 25% Reduction system (Initial) Wastewater Flow: 360 GPD  
 (See note below, if applicable ) Panel Block (Repair)

**Installation Requirements/Conditions**  
 Septic Tank Size 1000 gallons  
 Pump Tank Size \_\_\_\_\_ gallons  
 Number of trenches 2  
 Exact length of each trench 80 feet  
 Trenches shall be installed on contour at a Maximum Trench Depth of: 18-24 inches (Trench bottoms shall be level to +/- 1/4" in all directions)  
 Trench Spacing: 9 Feet on Center  
 Soil Cover: 6 inches (Maximum soil cover shall not exceed 36" above the trench bottom)  
 Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM  
 Aggregate Depth: \_\_\_\_\_ inches below pipe  
 \_\_\_\_\_ inches above pipe  
 \_\_\_\_\_ inches total

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.  
 Owner/Legal Representative Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 04-14-09  
 Construction Authorization Expiration Date: 04-14-2014

HTE# 08-500-198842

Permit # 25373

# Harnett County Department of Public Health Site Sketch

ISSUED TO: Stancel Builders


PROPERTY LOCATOR: Tinsgen Road

SUBDIVISION: Patton's Point

LOT # 175

Authorized State Agent: J. W. [Signature]

Date: 04-14-09

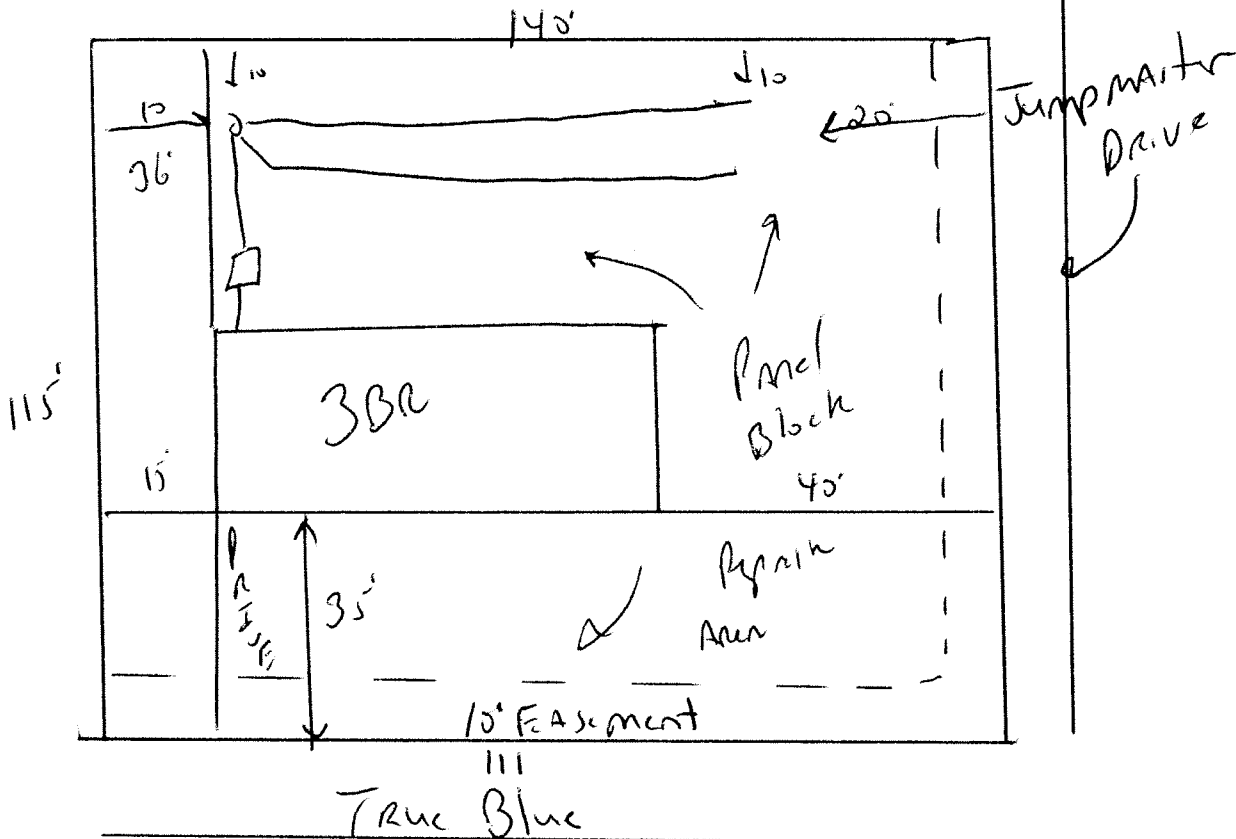

Meet onsite for Final Layout

Maintain All setbacks

STUB out plumbing shallow, AT ground level or higher  
Where shown

INSTALL 2 Lines 80' each of 25% Reduction System AT 18 to 24" Deep