

HTE# 08-5-19932

Harris County Department of Public Health

24632

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Comfort Homes INC PROPERTY LOCATION: 511448 ATKINS RD
 SUBDIVISION: STRETSON LOT # 5
 NEW REPAIR EXPANSION Site Improvements required prior to Construction Authorization Issuance:
 Type of Structure: SFD
 Proposed Wastewater System Type: 25% REDUCTION
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well _____ feet Permit valid for: Five years
 Permit conditions: _____ No expiration

Authorized State Agent: James E. Markantora Date: 5-12-08 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Comfort Homes INC PROPERTY LOCATION: 511448 ATKINS RD
 SUBDIVISION _____ LOT # 5
 Facility Type: SFD New Expansion Repair
 Basement? Yes No Pump Basement Fixtures? Yes No
 Type of Wastewater System** 25% REDUCTION (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable) MANIFOLD
25% REDUCTION system (Repair)

Installation Requirements/Conditions

Pump to manifold
4 x 80
 Septic Tank Size 1000 gallons Exact length of each trench 80 feet Trench Spacing: 9 Feet on Center
 Pump Tank Size 1000 gallons Trenches shall be installed on contour at a Soil Cover: 6 inches
4 x 1/2" sch 40 valves Maximum Trench Depth of: 28-18 inches (Maximum soil cover shall not exceed
2" supply - 2' of HEAD (Trench bottoms shall be level to +1-1/4" 36" above the trench bottom)
 Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: 6 inches below pipe
 _____ inches above pipe
 _____ inches total

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: James E. Markantora Date: 5-12-08 SEE ATTACHED SITE SKETCH
 Construction Authorization Expiration Date: 5-12-13


HTE# 08-5-19932

Permit # 24632

Harnett County Department of Public Health Site Sketch

ISSUED TO: Comfort Homes Inc PROPERTY LOCATOR: 521448 ATKINS RD
SUBDIVISION STATSDN LOT # 5

Authorized State Agent: James E. Marhart Date: 5-12-08

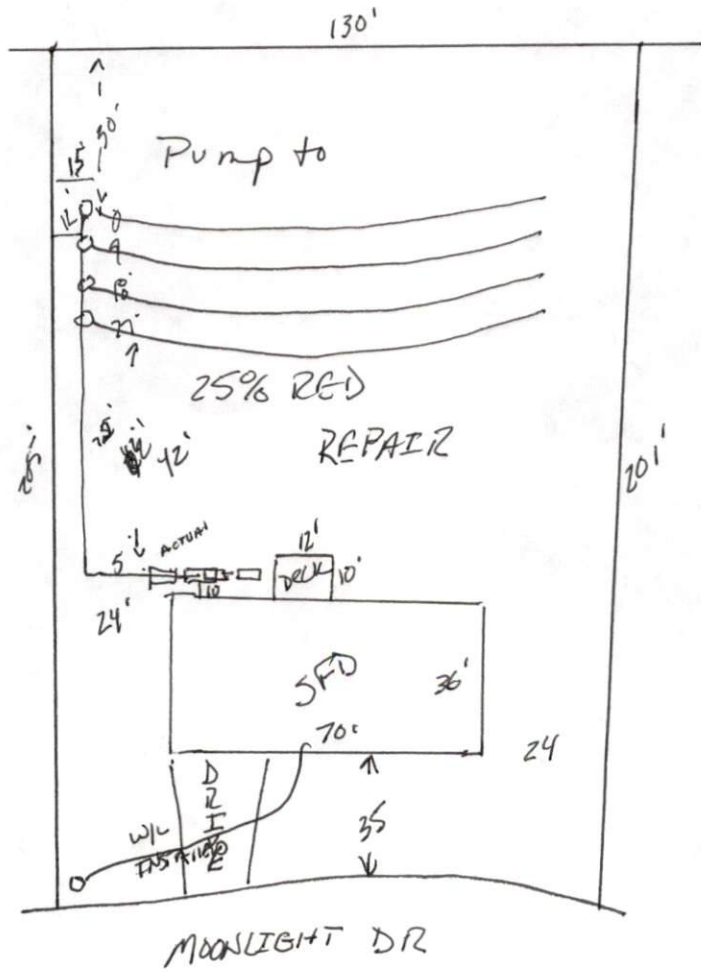

* ALL EXPOSED TO BE VISIBLE FOR FUND!