

HTE# 08-500-20003

Harnett County Department of Public Health

24782

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: ISRAEL LUCA PROPERTY LOCATION: 1141 SUBDIVISION: Sunset Ridge LOT # 167

NEW [X] REPAIR [] EXPANSION [] Type of Structure: SFO-58x42-3BR Proposed Wastewater System Type: Pump to 25% Reduction sys. Projected Daily Flow: 360 GPD Number of bedrooms: 3 Number of Occupants: 6 max

Site Improvements required prior to Construction Authorization Issuance:

Basement [] Yes [X] No Pump Required: [] Yes [] No [X] May be required based on final location and elevations of facilities Type of Water Supply: [] Community [X] Public [] Well Distance from well: 50 feet Permit valid for: [X] Five years [] No expiration

Permit conditions: STUB out Plumbing shallow, at ground level or higher where shown & pump may not be required if 18" ditch depth can be maintained next onsite maintain all set backs Authorized State Agent: J. LAM Date: 05-21-08 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: ISRAEL LUCA PROPERTY LOCATION: 1141 SUBDIVISION: Sunset Ridge LOT # 167

Facility Type: SFO-58x42-3BR [X] New [] Expansion [] Repair Basement? [] Yes [X] No Basement Fixtures? [] Yes [X] No Type of Wastewater System: Pump to 25% Reduction system (Initial) Wastewater Flow: GPD (See note below, if applicable) [X] 25% Reduction system (Repair)

Installation Requirements/Conditions Number of trenches: 1 Septic Tank Size: 1000 gallons Exact length of each trench: 230 feet Trench Spacing: 9 Feet on Center Pump Tank Size: 1000 gallons Trenches shall be installed on contour at a Maximum Trench Depth of: 18 inches Soil Cover: 6 inches (Maximum soil cover shall not exceed 36" above the trench bottom) Pump Requirements: ft. TDH vs. GPM Aggregate Depth: inches below pipe inches above pipe inches total

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit. Owner/Legal Representative Signature: Date:

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: J. LAM Date: 05-21-08 Construction Authorization Expiration Date: 05-21-2013

HTE# 08-500-20003

Permit # 24782

Harnett County Department of Public Health Site Sketch

ISSUED TO: ISRAEL Lucas


PROPERTY LOCATOR: 1171

SUBDIVISION Sunset Ridge

LOT # 167

Authorized State Agent: J. White

Date: 05.21.08

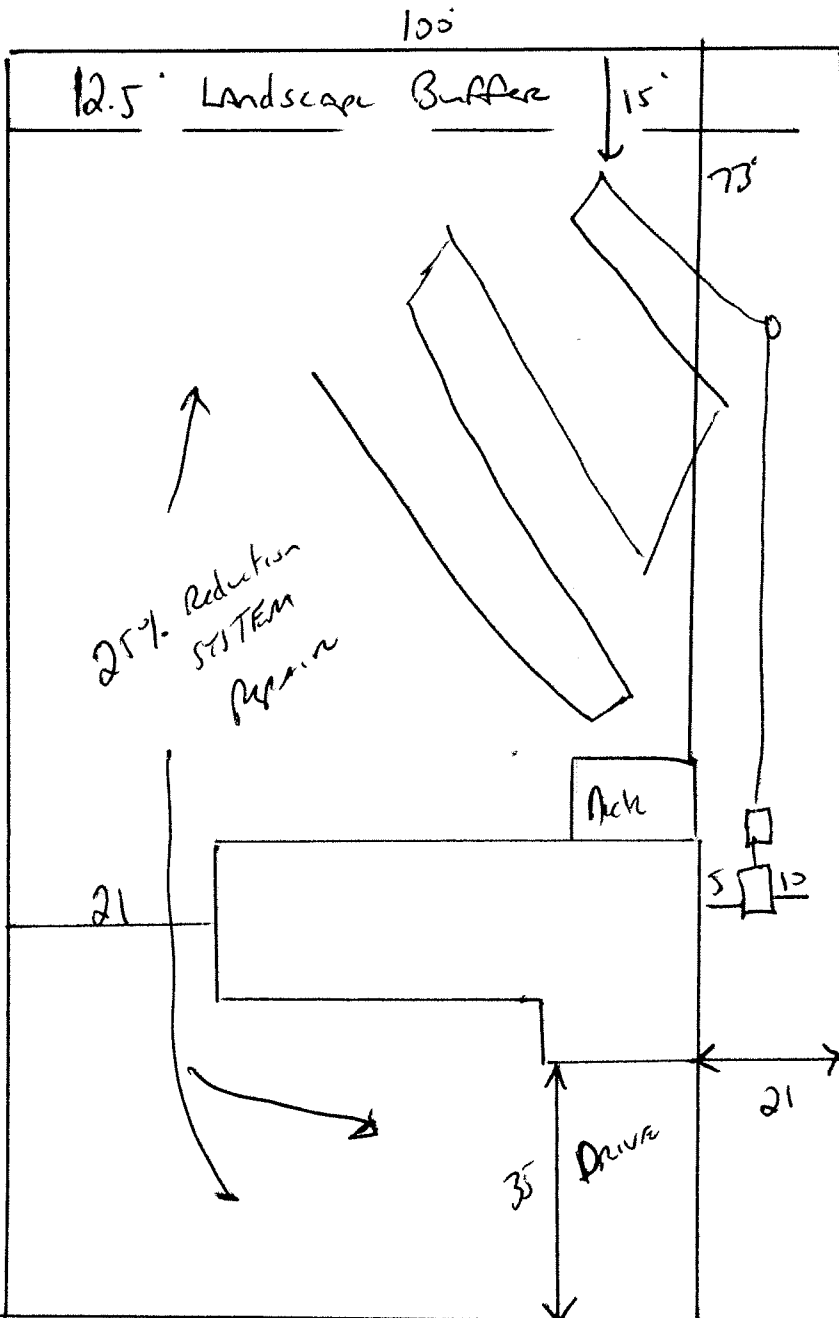

STUB out Plumbing
Shallow, at ground level
or higher where shown
and Pump may not be
Required if 18" Ditch
Depth can be maintained
Meet on site
MAINTAIN ALL Jet Backs
Install 230' of 25%
Reduction system at
18"