

HTE# 08-5-20297

# Harnett County Department of Public Health 24578

## Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Comfort Homes, Inc. PROPERTY LOCATION: SR 1412 Christian Light Rd.  
 NEW  REPAIR  EXPANSION  SUBDIVISION: Forest Trail LOT # 113  
 Type of Structure: SFD 63x44 Site Improvements required prior to Construction Authorization Issuance:  
 Proposed Wastewater System Type: 25% Reduct. on System  
 Projected Daily Flow: 360 GPD  
 Number of bedrooms: 3 Number of Occupants: 6 max  
 Basement  Yes  No  
 Pump Required:  Yes  No  May be required based on final location and elevations of facilities  
 Type of Water Supply:  Community  Public  Well Distance from well \_\_\_\_\_ feet Permit valid for:  Five years  
 Permit conditions: \_\_\_\_\_  No expiration

Authorized State Agent: Bryan McSwain, R.S. Date: 7/17/2008 SEE ATTACHED SITE SKETCH  
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

## Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Comfort Homes, Inc. PROPERTY LOCATION: SR 1412 Christian Light  
 SUBDIVISION: Forest Trail LOT # 113  
 Facility Type: SFD  New  Expansion  Repair  
 Basement?  Yes  No Basement Fixtures?  Yes  No  
 Type of Wastewater System\*\* 25% Reduction System (initial) Wastewater Flow: 360 GPD  
 (See note below, if applicable ) 25% Reduction System (Repair)

### Installation Requirements/Conditions

Septic Tank Size 1000 gallons Exact length of each trench 4x80 feet Trench Spacing: 9 Feet on Center  
 Pump Tank Size \_\_\_\_\_ gallons Trenches shall be installed on contour at a Soil Cover: 6 inches  
 Maximum Trench Depth of: 18 inches (Maximum soil cover shall not exceed  
 (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom)  
 in all directions)  
 Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM \_\_\_\_\_ inches below pipe

Conditions: Drain lines to be run on contour + NO DEEPER than 18 inches. Spacing between trenches may be greater than 9ft. on center Aggregate Depth: \_\_\_\_\_ inches above pipe  
 \_\_\_\_\_ inches total

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.  
 Owner/Legal Representative Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

Authorized State Agent: Bryan McSwain, R.S. Date: 7/17/2008 SEE ATTACHED SITE SKETCH  
 Construction Authorization Expiration Date: 7/17/2013

HTE# 08-5-20297


Permit # 24578

# Harnett County Department of Public Health Site Sketch

ISSUED TO: Comfort Homes, Inc. PROPERTY LOCATOR: SR1412 Christian Light Rd  
SUBDIVISION: Forest Trails LOT # 113

Authorized State Agent: [Signature] Date: 7/17/2008

X System layout may be different than sketch due to contour of land

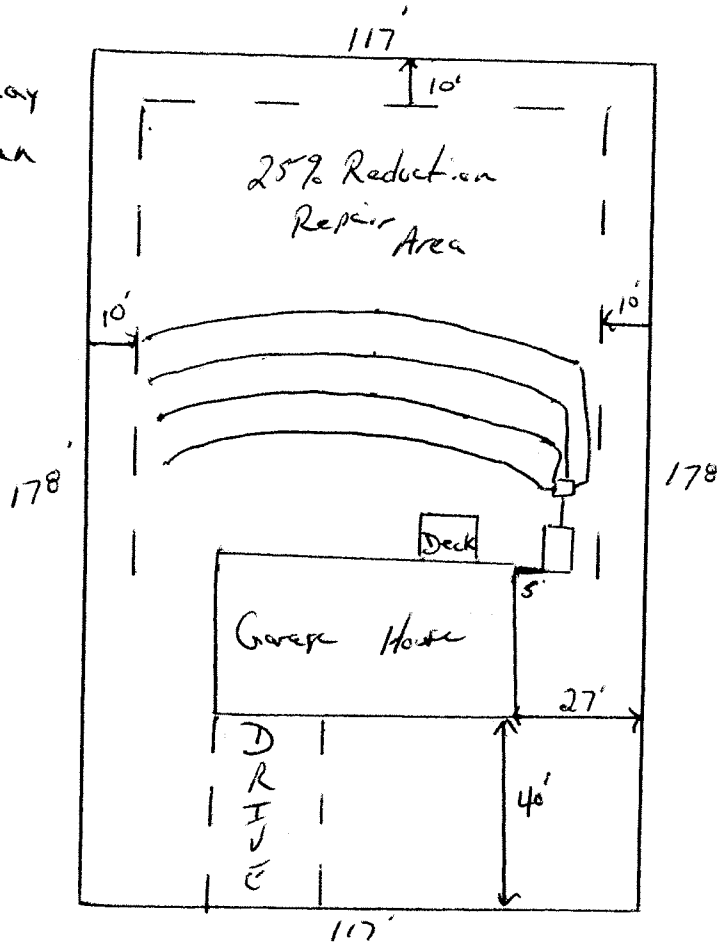

Kinsman Court