

HTE# 08-500-20258

# Harnett County Department of Public Health

25208

## Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: D Walsh Const. PROPERTY LOCATION: 1139  
SUBDIVISION Tinzen Place LOT # 56

NEW  REPAIR  EXPANSION   
Type of Structure: SFD 38x37-3BR  
Proposed Wastewater System Type: Pump to 25% Red. system  
Projected Daily Flow: 360 GPD  
Number of bedrooms: 3 Number of Occupants: 6 max  
Basement  Yes  No

Site Improvements required prior to Construction Authorization Issuance:

Pump Required:  Yes  No  May be required based on final location and elevations of facilities  
Type of Water Supply:  Community  Public  Well Distance from well 100 feet Permit valid for:  Five years  
Permit conditions: Meet on site for final layout - maintain all setbacks  No expiration  
Stub out Plumbing shallows, At Ground level or higher where shown and if 18"-24" Dist Depth can be maintained Pump may not be Required.

Authorized State Agent: J. Wade Date: 11-26-08 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

## Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: D Walsh Const. PROPERTY LOCATION: 1139  
SUBDIVISION Tinzen Place LOT # 56

Facility Type: SFD-38x37-3BR  New  Expansion  Repair  
Basement?  Yes  No Basement Fixtures?  Yes  No  
Type of Wastewater System\*\* Pump to 25% Reduction system (Initial) Wastewater Flow: 360 GPD  
(See note below, if applicable)  Pump to 25% Red. system (Repair)

Installation Requirements/Conditions  
Septic Tank Size 1000 gallons Number of trenches 1  
Pump Tank Size 1000 gallons Exact length of each trench 180 feet  
If needed Trenches shall be installed on contour at a Trench Spacing: 9 Feet on Center  
Maximum Trench Depth of: 18.24 inches Soil Cover: 6 inches  
(Trench bottoms shall be level to +/-1/4" in all directions) (Maximum soil cover shall not exceed 36" above the trench bottom)  
Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM Aggregate Depth: \_\_\_\_\_ inches below pipe  
Conditions: \_\_\_\_\_ inches above pipe  
\_\_\_\_\_ inches total

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: \_\_\_\_\_ Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: J. Wade Date: 11-26-08

Construction Authorization Expiration Date: 11-26-2013

HTE# 08-500-21258

Permit # 25208

# Harnett County Department of Public Health Site Sketch

ISSUED TO: D. Walsh Const.


PROPERTY LOCATOR: 1139

SUBDIVISION Tingen Place

LOT # 56

Authorized State Agent: J. Wiley

Date: 11/26/08

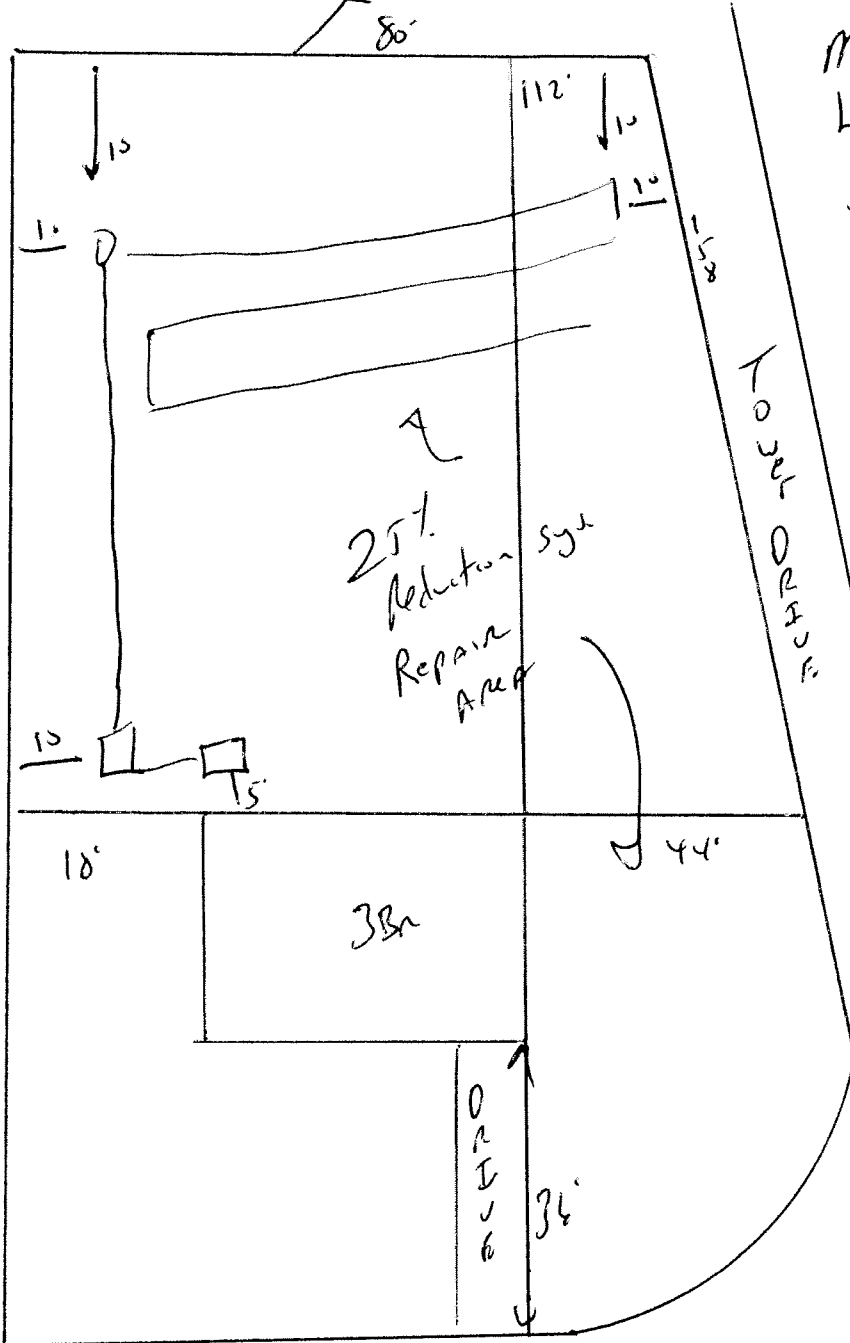

Meet onsite for Final Layout. maintain All Setbacks

Stub out Plumbing shallow At ground level or higher Where shown and if 18 to 24" Ditch Depth can be maintained then pump may not be required

Install 180' of 25% Reduction system at 18"-24" Deep.

81

Milano Ct.