

HTE# 09-5-22021

Harnett County Department of Public Health Improvement Permit

25477

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: BILL CLARK HOMES PROPERTY LOCATION: WILL LUCAS RD
 NEW REPAIR EXPANSION SUBDIVISION CAROLINA OAKS LOT # 49
 Type of Structure: SFO (64x43') Site Improvements required prior to Construction Authorization Issuance: _____
 Proposed Wastewater System Type: CONVENTIONAL
 Projected Daily Flow: 480 GPD
 Number of bedrooms: 4 Number of Occupants: 8 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well 100 feet Permit valid for: Five years
 Permit conditions: _____ No expiration

Authorized State Agent: [Signature] Date: 5/19/09 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: BILL CLARK HOMES PROPERTY LOCATION: WILL LUCAS RD
 Facility Type: SFO (64x43') New Expansion Repair
 SUBDIVISION CAROLINA OAKS LOT # 49
 Basement? Yes No Basement Fixtures? Yes No

Type of Wastewater System** CONVENTIONAL (Initial) Wastewater Flow: 480 GPD
 (See note below, if applicable)
25% REDUCTION SYSTEM (Repair)

Installation Requirements/Conditions

Septic Tank Size <u>1000</u> gallons	Number of trenches <u>1</u>	
Pump Tank Size _____ gallons	Exact length of each trench <u>320</u> feet	Trench Spacing: <u>9</u> Feet on Center
	Trenches shall be installed on contour at a	Soil Cover: <u>12-24</u> inches
	Maximum Trench Depth of: <u>24-36</u> inches	(Maximum soil cover shall not exceed
	(Trench bottoms shall be level to +/- 1/4" in all directions)	36" above the trench bottom)
Pump Requirements: _____ ft. TDH vs. _____ GPM		Aggregate Depth: <u>6</u> inches below pipe
		<u>2</u> inches above pipe
Conditions: _____		<u>12</u> inches total

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 5/19/09
Construction Authorization Expiration Date: 5/19/14


HTE# 09-522021

Permit # 25477

Harnett County Department of Public Health Site Sketch

ISSUED TO: BILL CLARK HOMES PROPERTY LOCATION: WILL LUCAS RD
SUBDIVISION CAROLINA OAKS LOT # 49

Authorized State Agent: ~~XXXXXXXXXXXXXXXXXXXX~~ RS (OLIVER TOLKSDORF) Date: 5/19/09

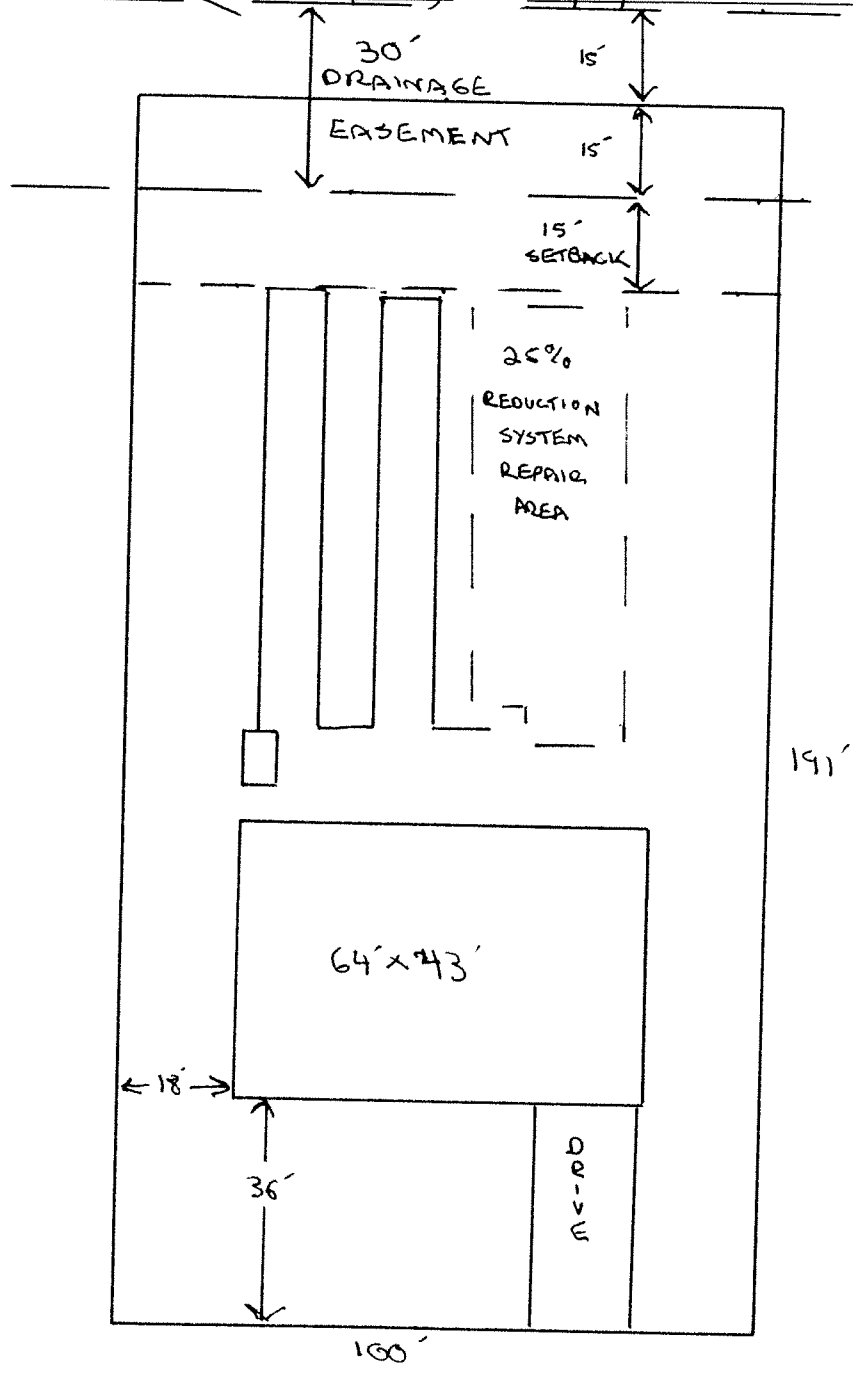

CAROLINA OAKS CIRCLE