

HTE# 09-5-222-44R

Harriett County Department of Public Health

25330

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: BILL CLARK HOMES PROPERTY LOCATION: WILL LUCAS RD
RAM DEVELOPMENT SUBDIVISION CAROLINA OAKS LOT # 59
 NEW REPAIR EXPANSION
 Type of Structure: SFO (58'x43') 52'x32'
 Proposed Wastewater System Type: PUMP TO CONVENTIONAL
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well 100 feet
 Permit conditions: _____ Permit valid for: Five years No expiration

Authorized State Agent: [Signature] Date: 6/23/09 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.
REVISED 06/28/12

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: BILL CLARK HOMES PROPERTY LOCATION: WILL LUCAS RD
RAM DEVELOPMENT SUBDIVISION CAROLINA OAKS LOT # 59
 Facility Type: SFO (58'x43') 52'x32' New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** PUMP TO CONVENTIONAL (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable PUMP TO CONVENTIONAL (Repair))

Installation Requirements/Conditions
 Septic Tank Size 1000 gallons
 Pump Tank Size 1000 gallons
 Number of trenches 1
 Exact length of each trench 300 feet
 Trench Spacing: 9 Feet on Center
 Trenches shall be installed on contour at a
 Maximum Trench Depth of: 12-14 inches
 (Trench bottoms shall be level to +/-1/4" in all directions)
 Pump Requirements: _____ ft. TDH vs. _____ GPM
 Soil Cover: 6 inches
 (Maximum soil cover shall not exceed 36" above the trench bottom)
 Conditions: 6" OF COVER NEEDED OVER DRAINFIELD
 Aggregate Depth: 6 inches below pipe
2 inches above pipe
12 inches total

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.
 Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 6/23/09
REVISED 06/28/12 Construction Authorization Expiration Date: 6/23/14

HTE# 09-5-222442

Permit # 25330

Harnett County Department of Public Health Site Sketch


BILL CLARK HOMES

PROPERTY LOCATOR: WILL LUCAS RD

ISSUED TO: ~~RAM DEVELOPMENT~~ SUBDIVISION CAROLINA OAKS LOT # 59

Authorized State Agent: ~~[Signature]~~ OS (OLIVER TOLKSOORF) Date: 6/23/09

REVISED 05/02/12

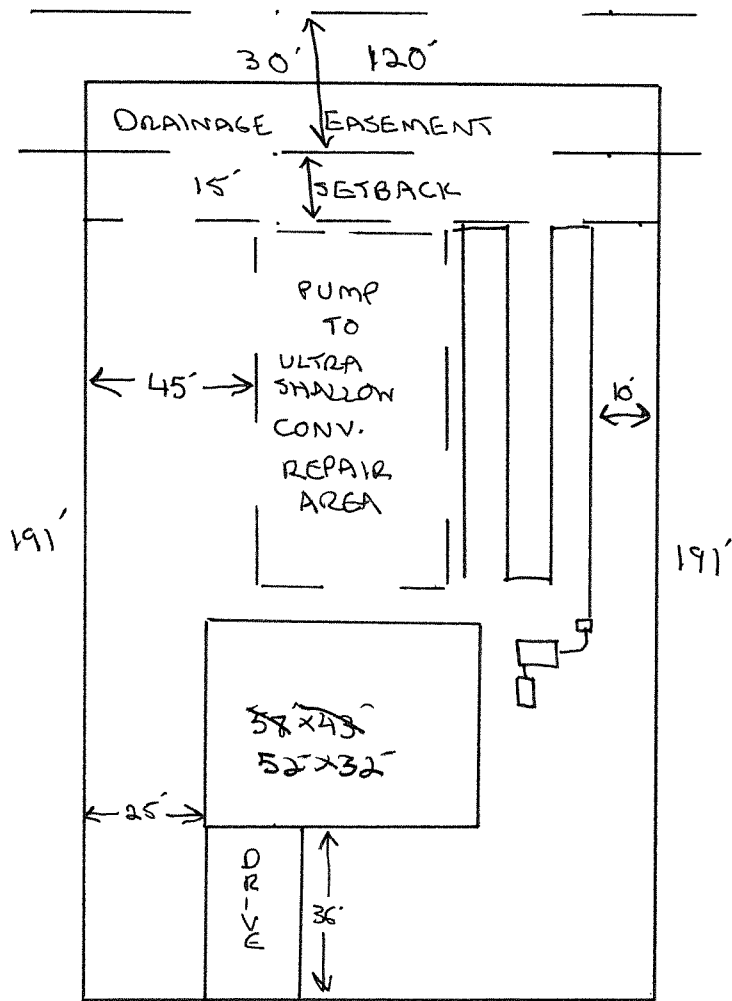

CAROLINA OAKS CIRCLE