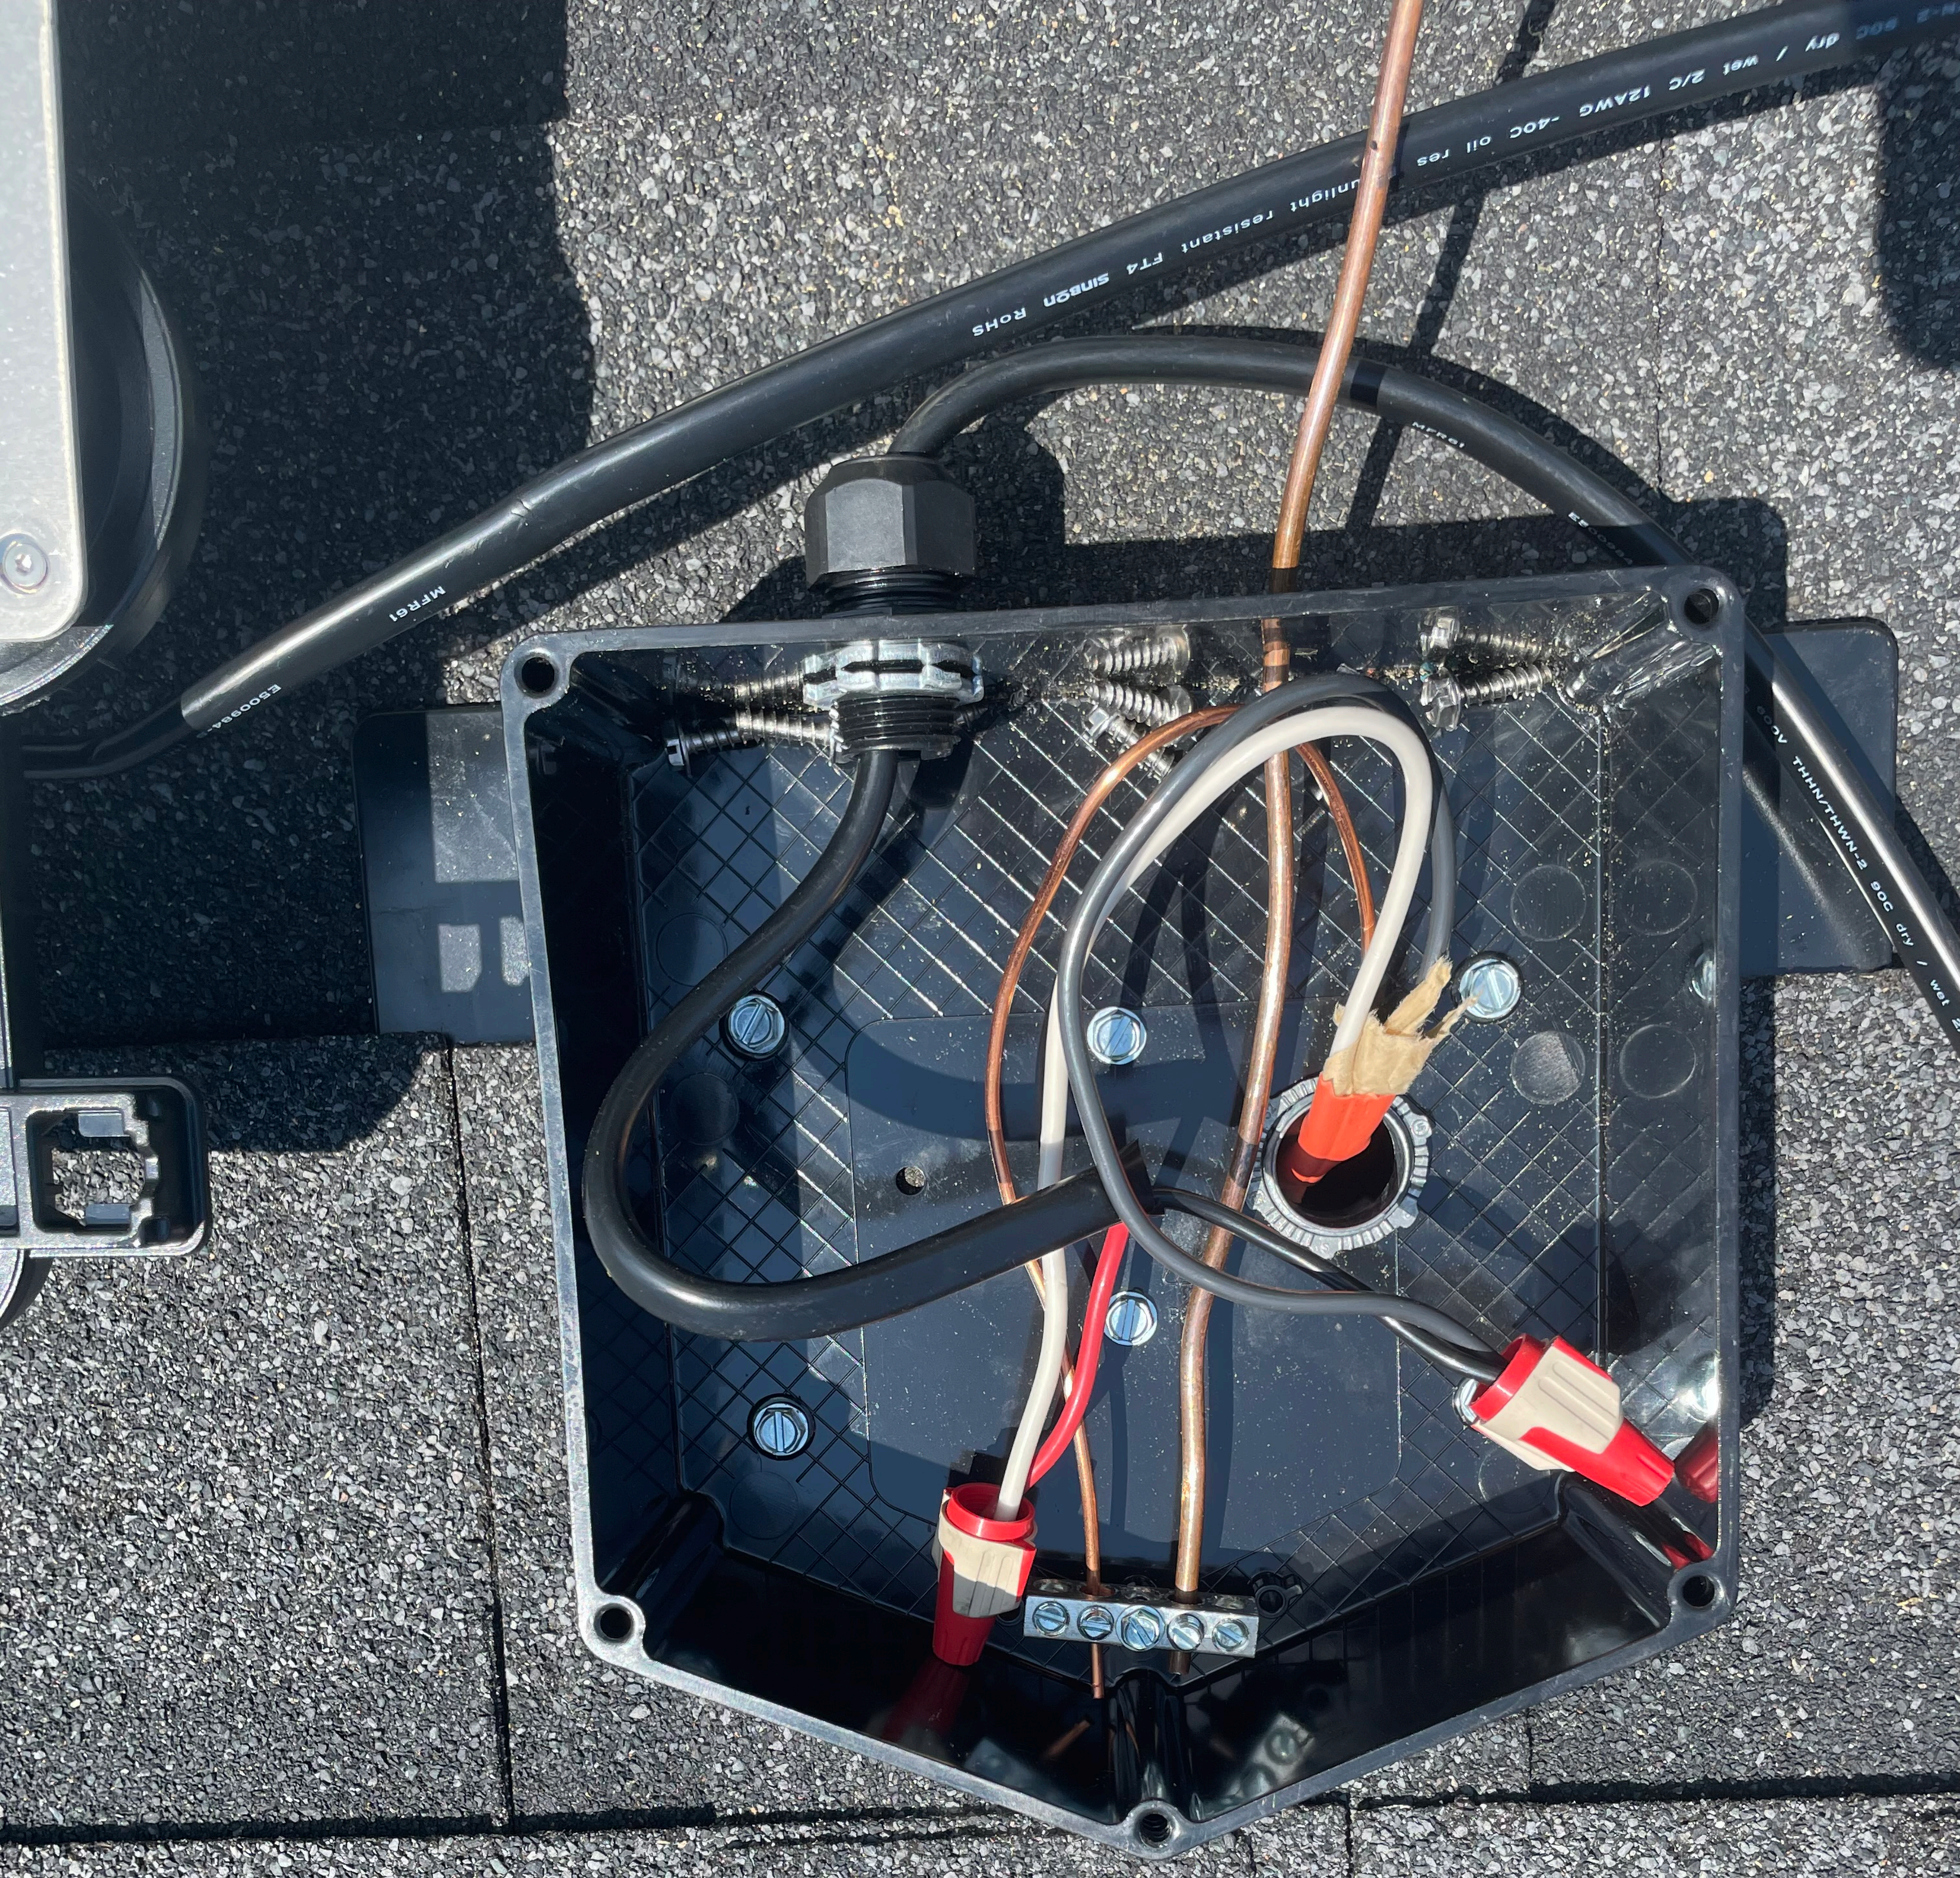
MFR61
sunlight resistant FT4 sinaon RoHS
-40C oil res
12AWG
2/C
wet
dry
90C
THHN/THWN-2
90C dry / wet

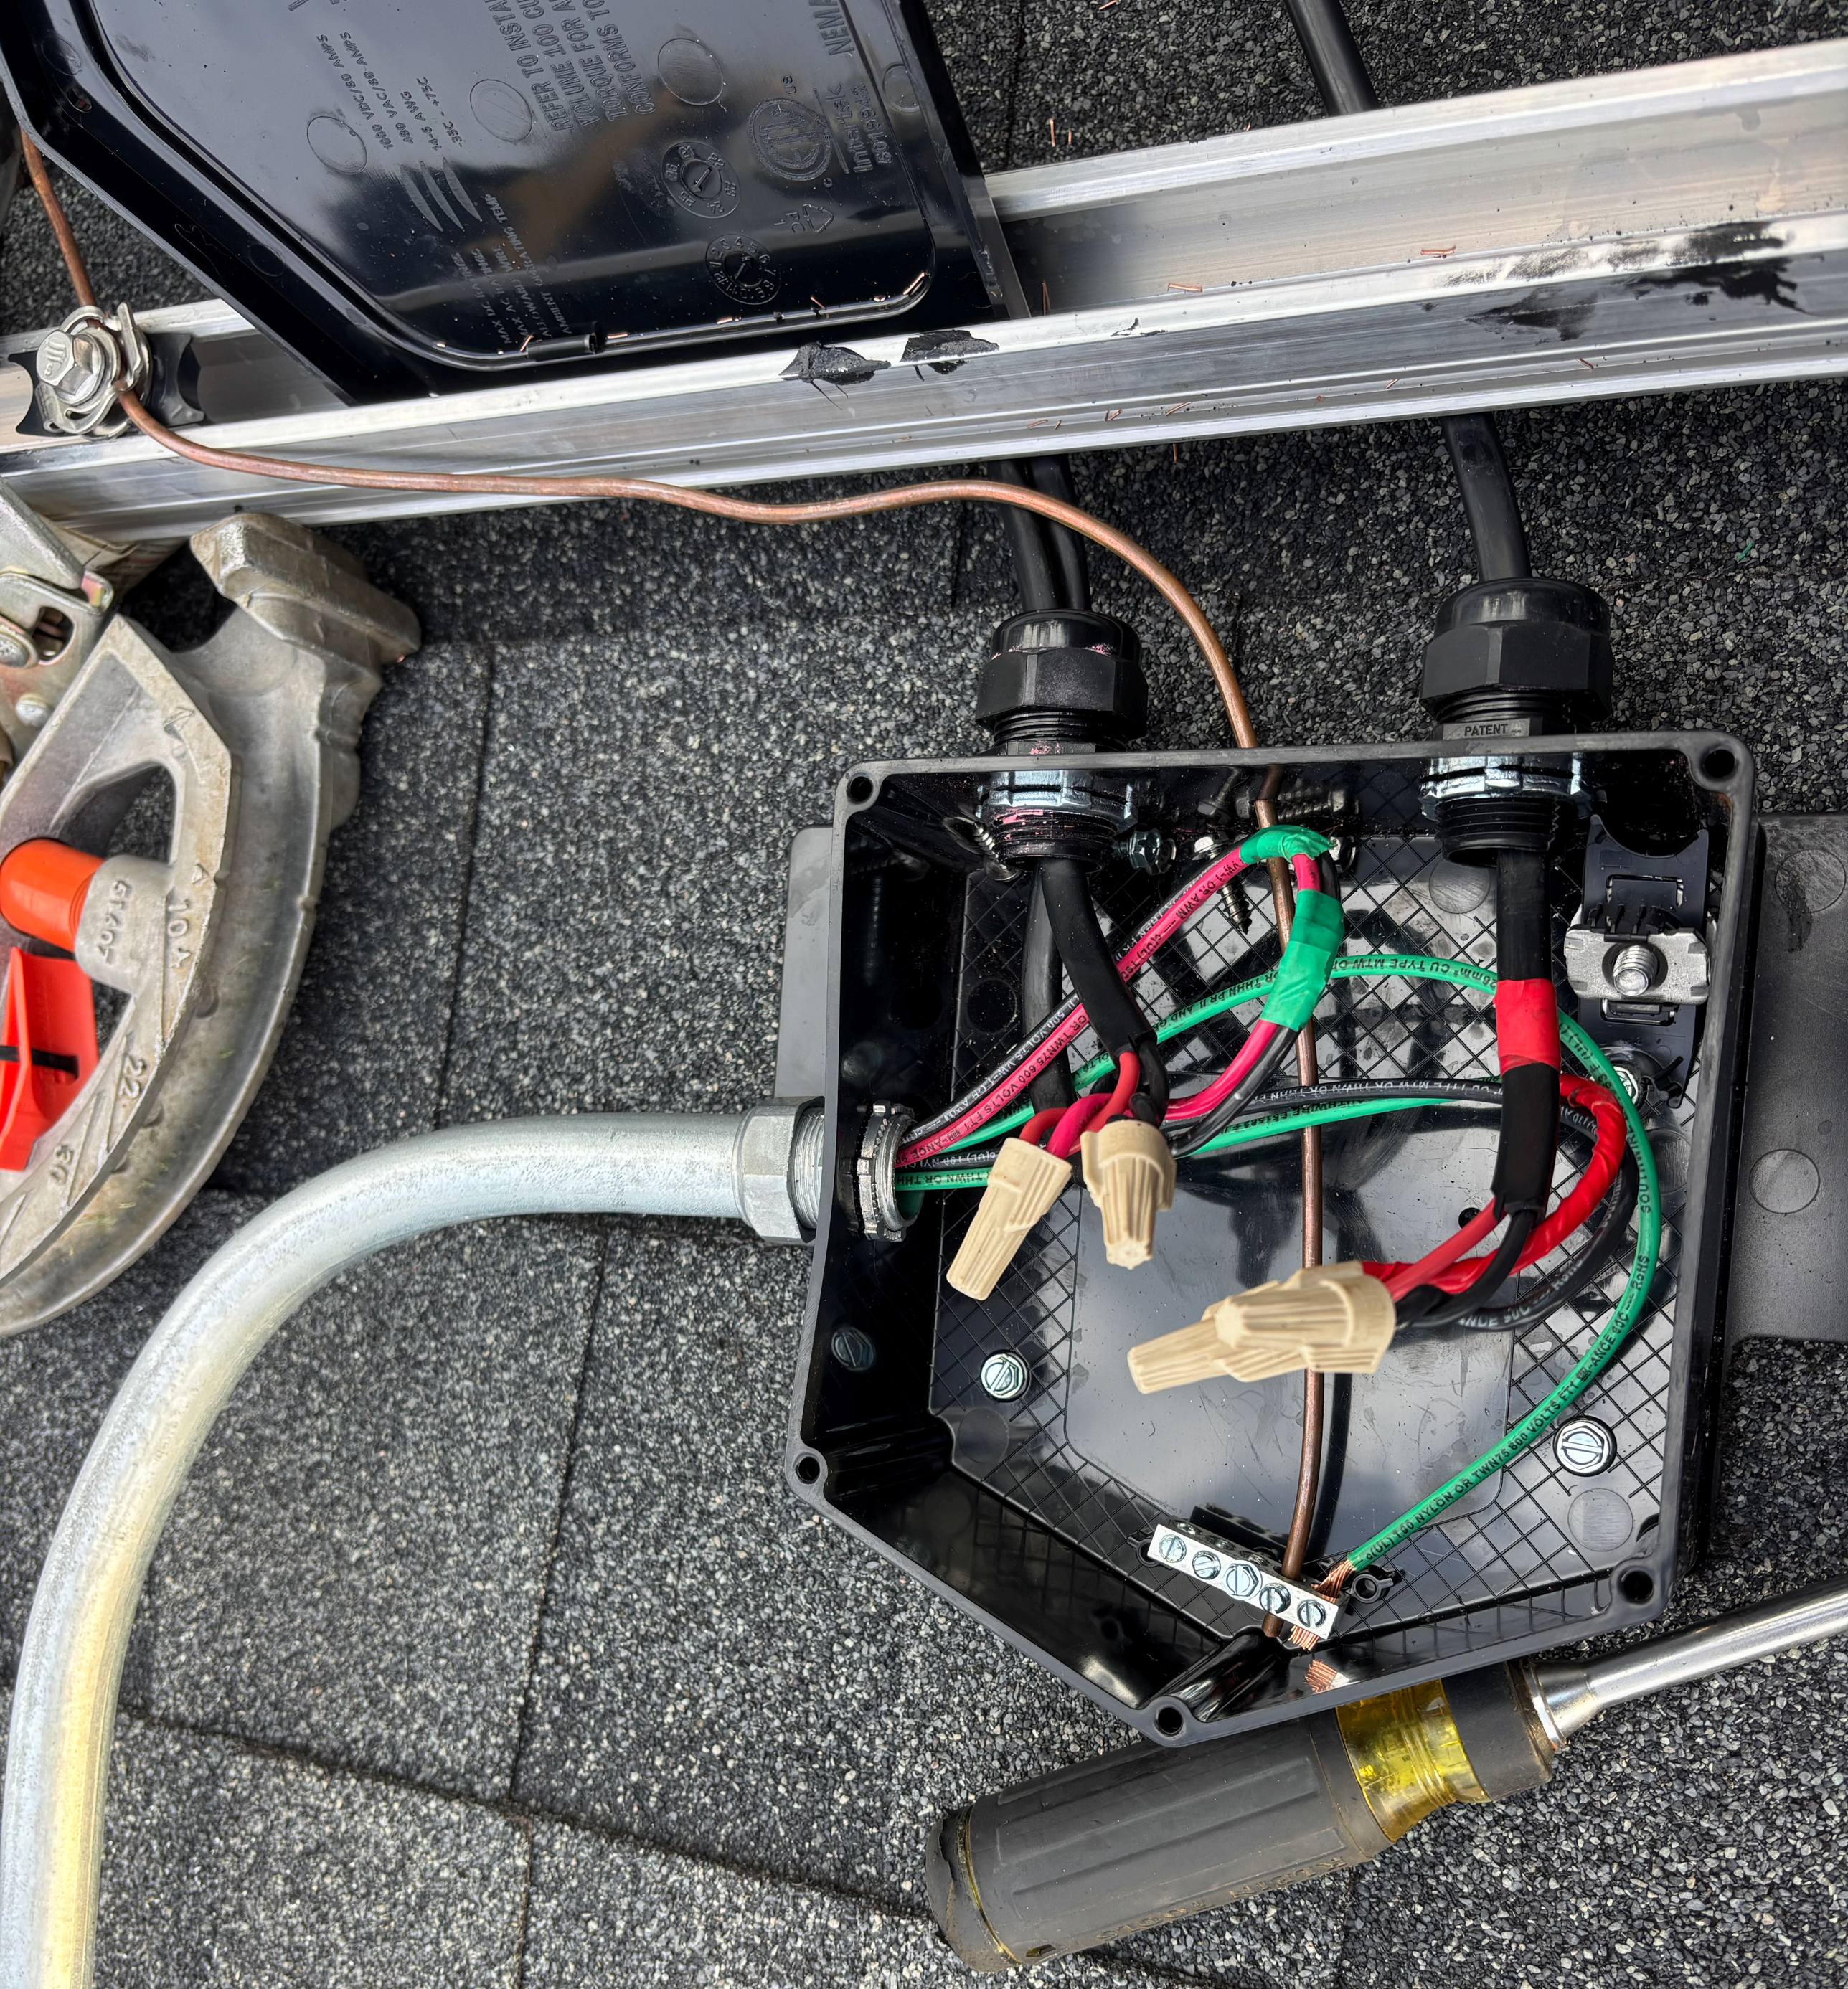
PATENT

EZ SOLAR

PHOTOVOLTAIC POWER SOURCE

pvlabels.com

03-315

Patents: ezsolarproducts.com/patents

MADE IN USA

PHOTOVOLTAIC POWER SOURCE

3
3
5
CAUTION
WERNER

CAUTION
MULTIPLE SOURCES OF POWER
Spectrum
SIEMENS
GENERAL DUTY
ENCLOSED SWITCH
60A 240VAC, 250VDC
DANGER
ON
OFF
AC DISCONNECT
PHOTOVOLTAIC SYSTEM
POWER SOURCE
RATED AC
OUTPUT CURRENT
AMPS
NOMINAL OPERATING
AC VOLTAGE
VOLTS
CAUTION
MULTIPLE SOURCES OF POWER
ENPHASE
SOLAR PV SYSTEM
EQUIPPED WITH
RAPID SHUTDOWN
SOLAR ELECTRIC
PV PANELS
TURN RAPID SHUTDOWN SWITCH TO
THE "OFF" POSITION TO SHUT DOWN
PV SYSTEM AND REDUCE
SHOCK HAZARD IN THE ARRAY

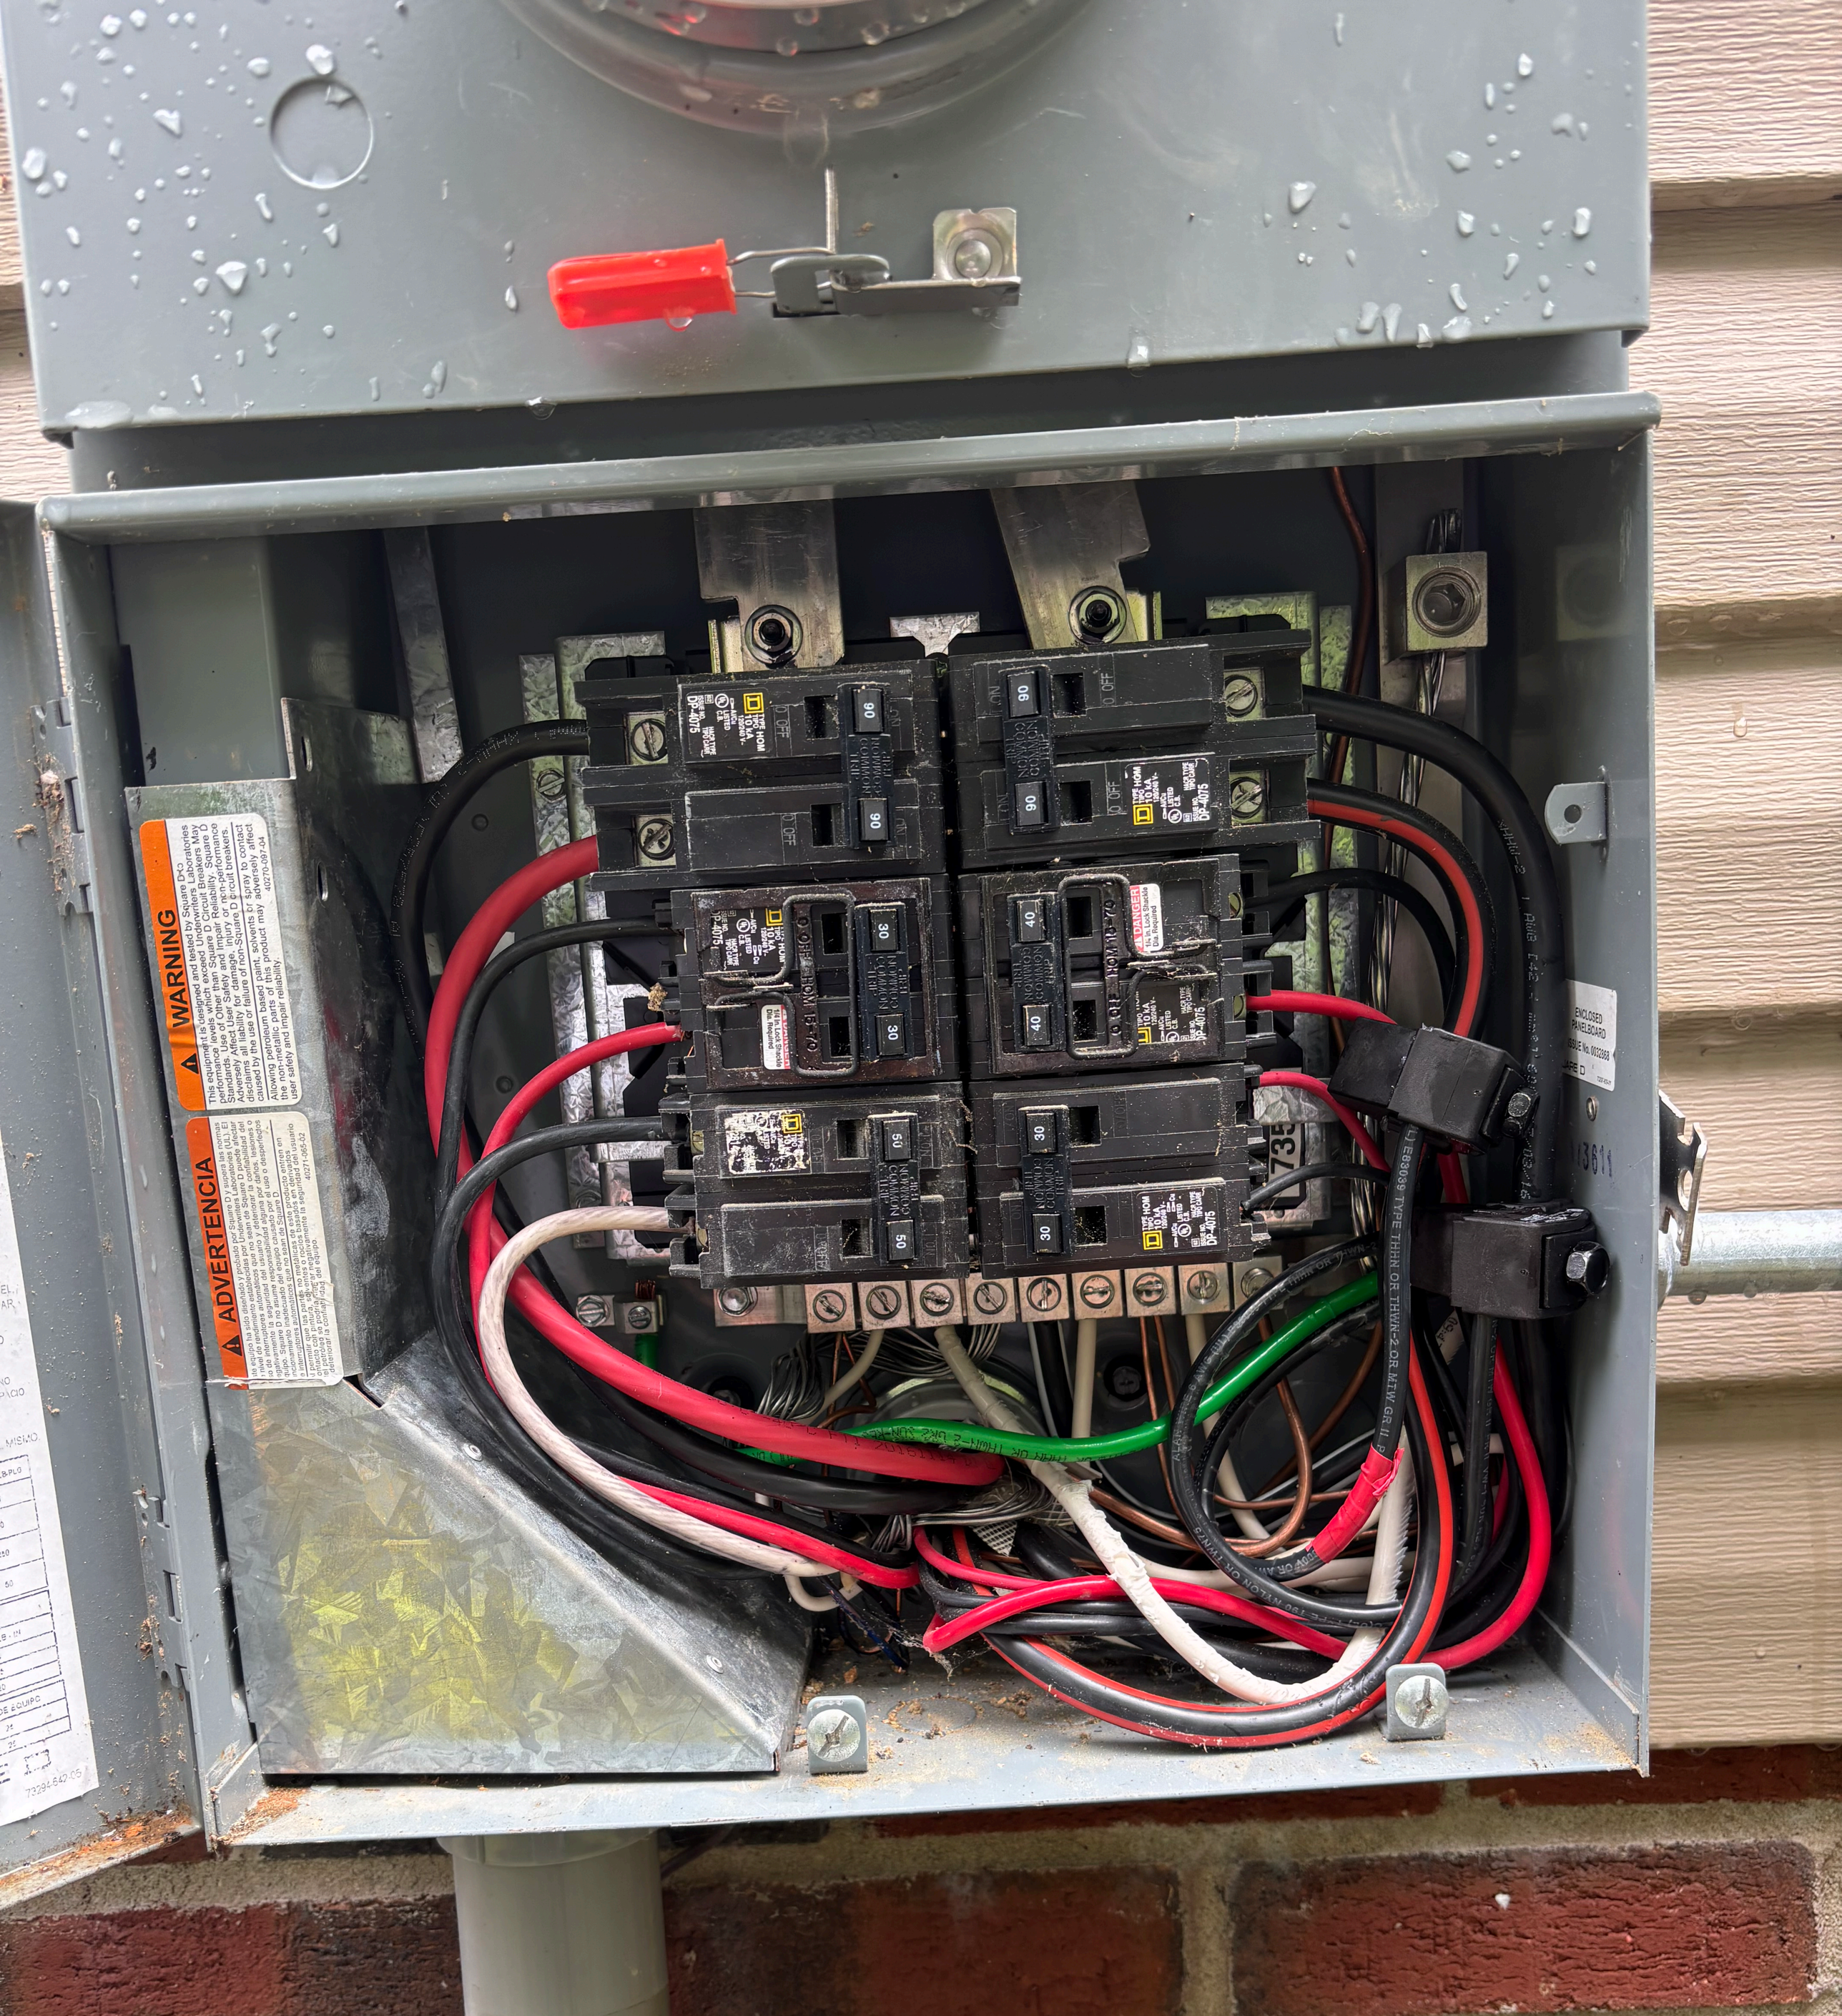
WARNING
This equipment is designed and tested by Square D to Underwriters Laboratories standards which exceed many other than Square D Circuit Breakers May Affect Performance levels. Other than Square D circuit breakers. Use Of Safety and Impair Reliability. Performance Statements for damage. Square D circuit breakers. Accordingly affect disclaims all liability or failure of non-Square D to contact disclaims all liability for damage, injury or non-performance caused by the use or failure of non-Square D circuit breakers. Allowing petroleum based paint, solvents or spray to contact the non-metallic parts of this product may adversely affect user safety and impair reliability.
40270-097-04
ADVERTENCIA
40271-065-02
ENCLOSED PANELBOARD
ISSUE No. 9012868
TYPE D
E63036 TYPE THHN OR THWN-2 OR MTW GR II
DANGER
1/4 In. Lock Shackle Dia. Required
TYPE HOM 10 KA 120/240 V~
DP-4075
HOM 15-70
HOM 15-70
HOM 15-70

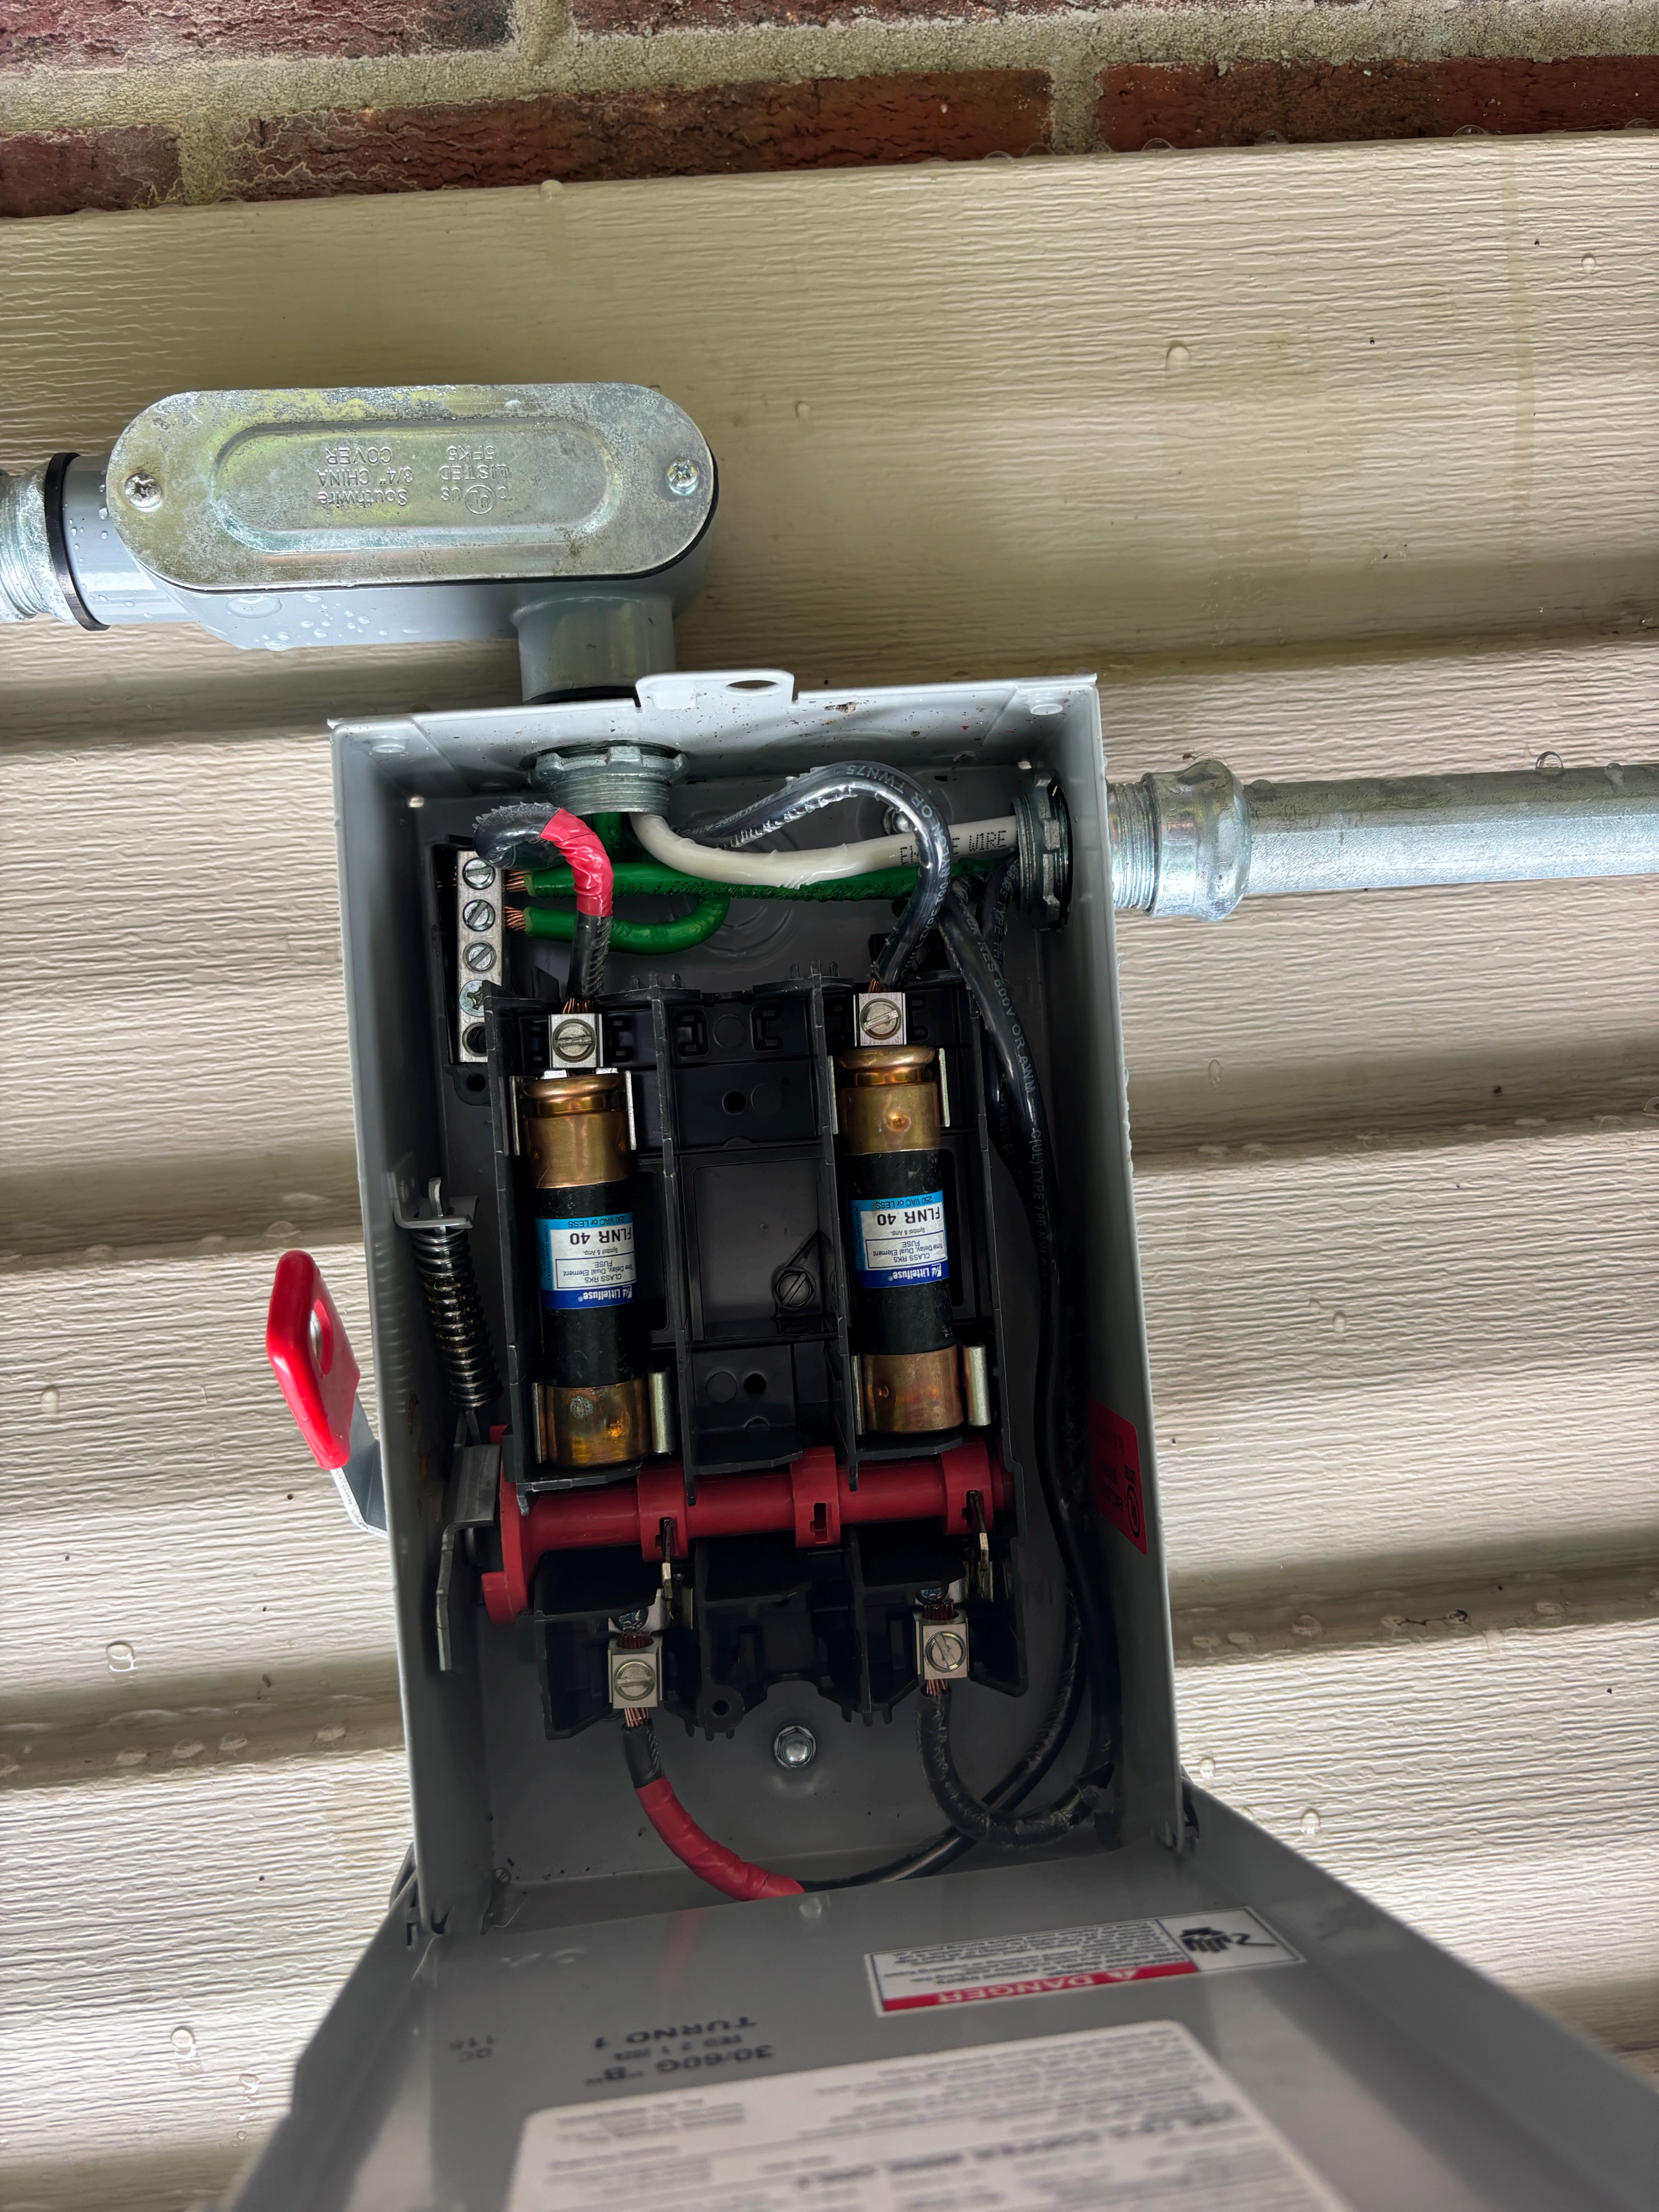
Southwire
3/4" CHINA
COVER
LISTED
5FK5
FLNR 40
Littelfuse
CLASS RK5
Time Delay, Dual Element
FUSE
250 VAC or LESS
DANGER
TURNO 1
30/60G -8-

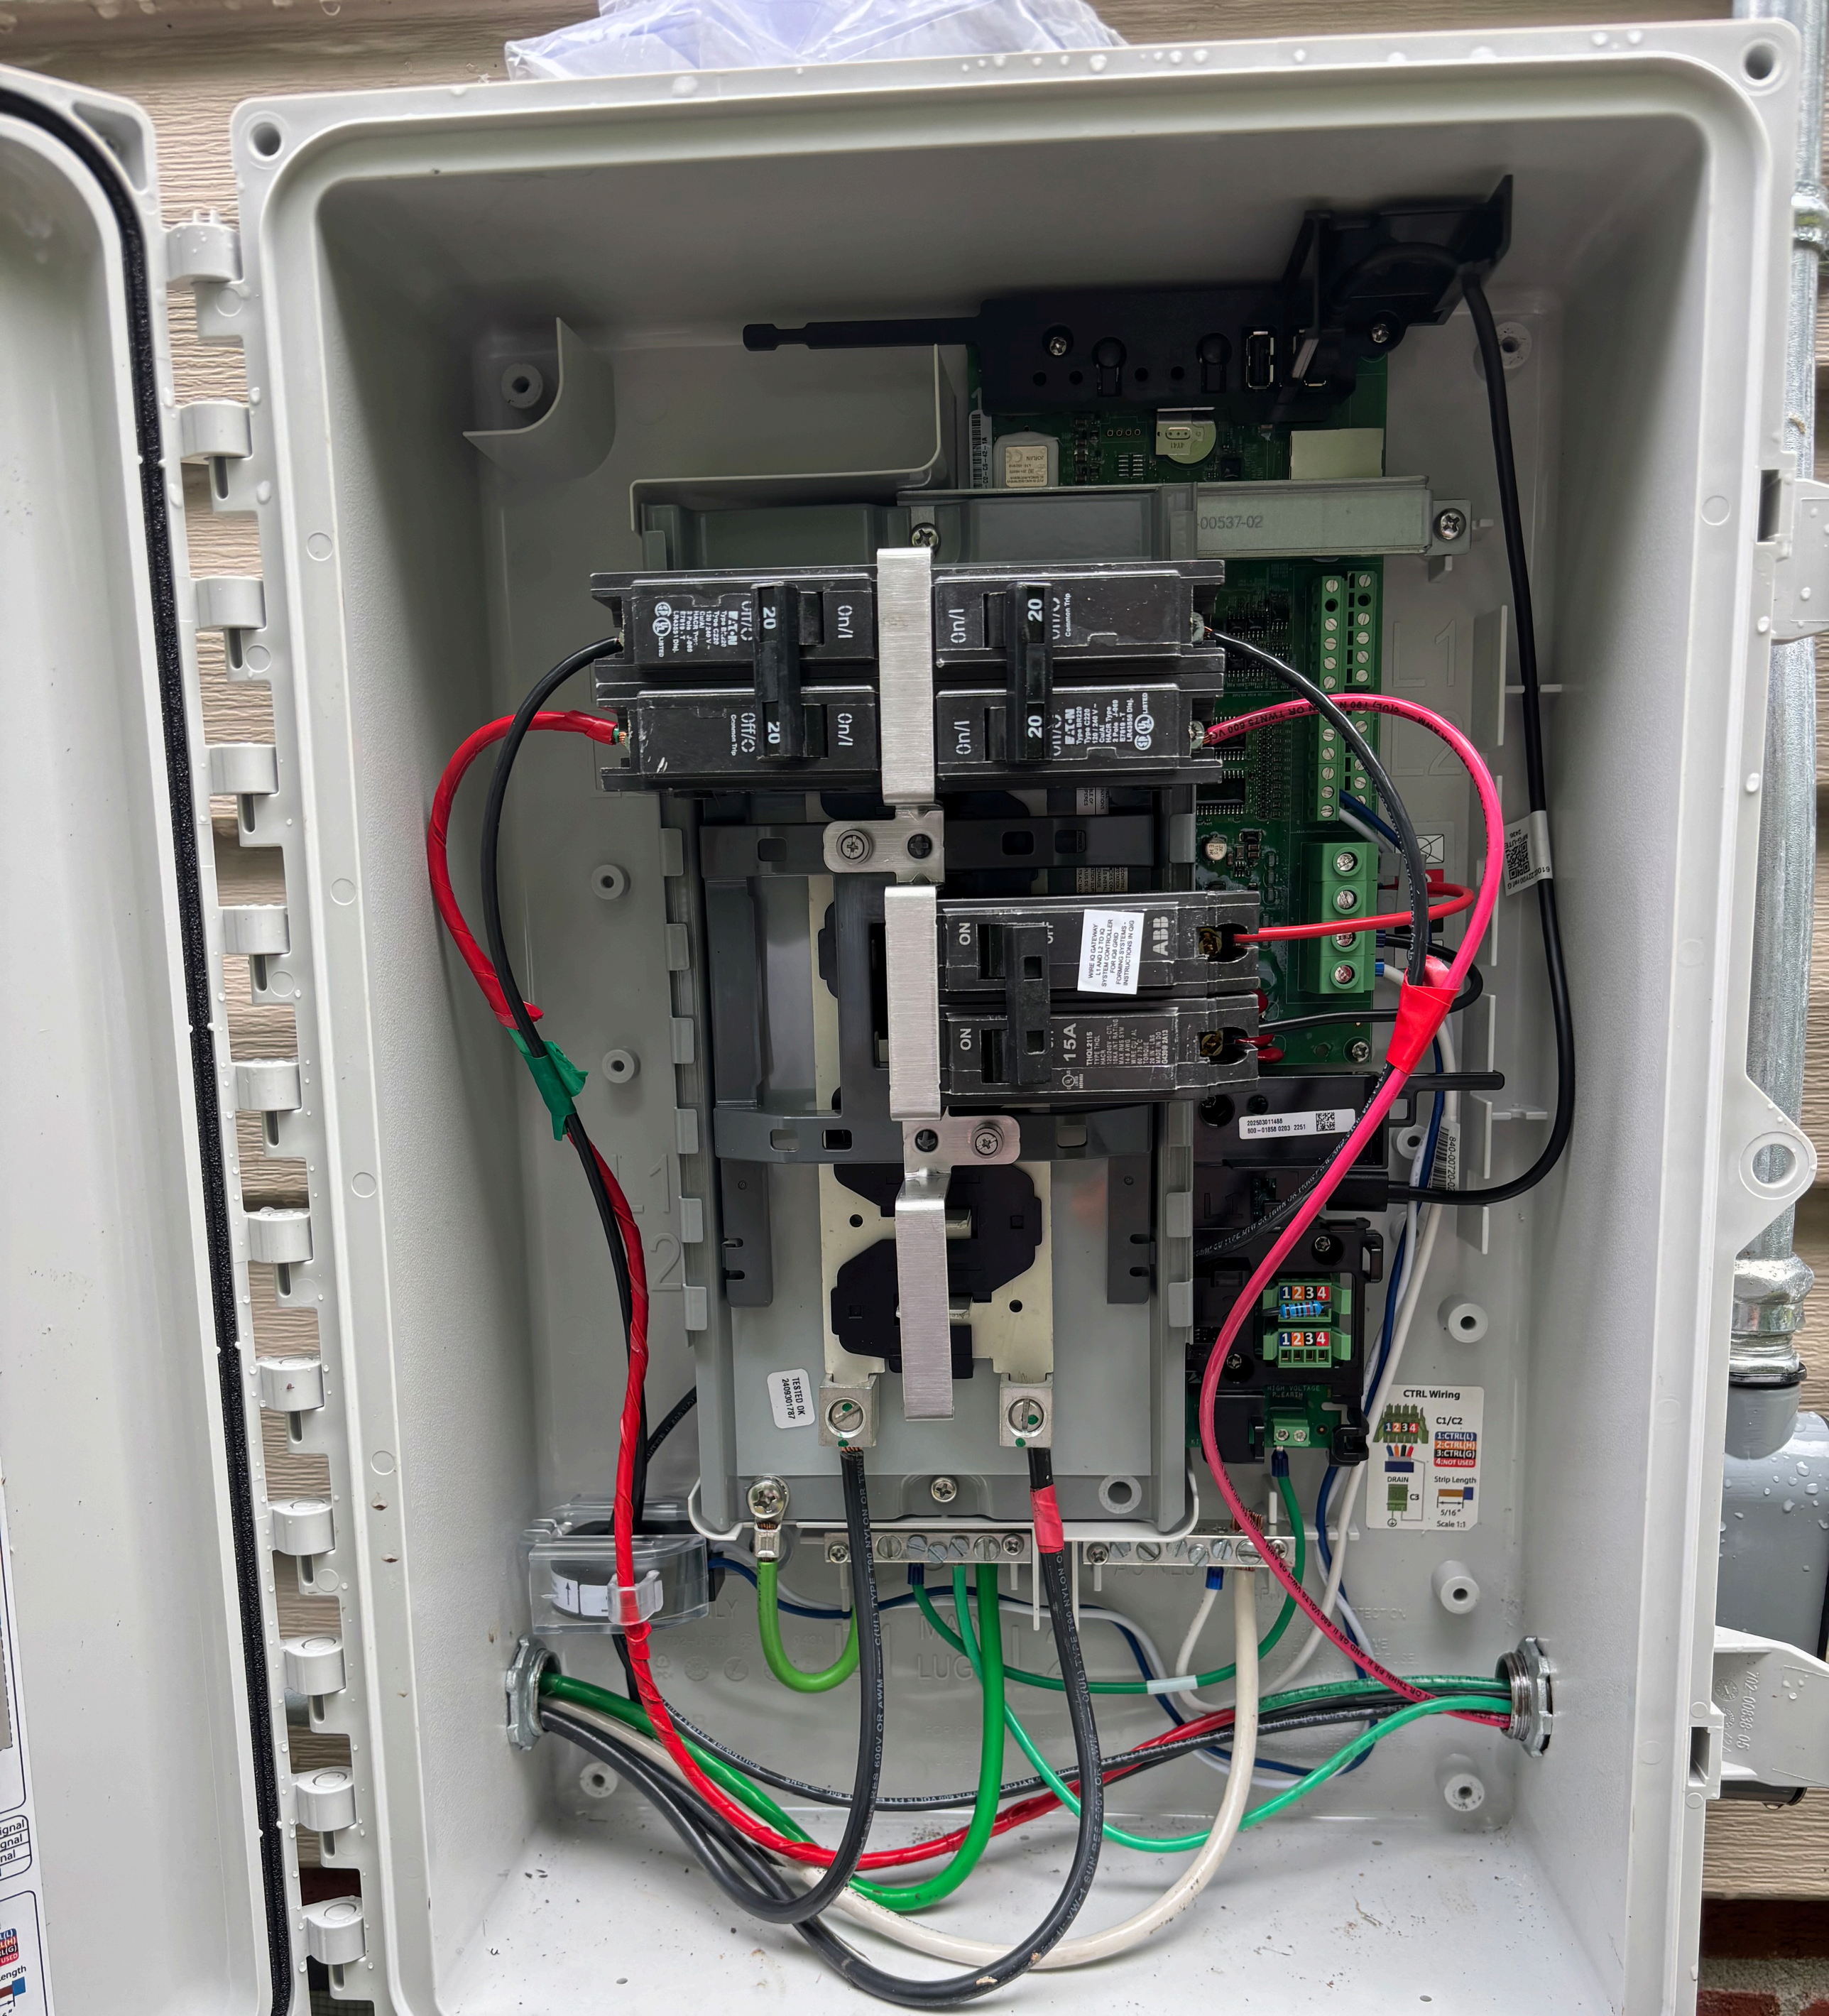
WIRE IQ GATEWAY
SYSTEM CONTROLLER
L1 AND L2 TO GRID
FOR 240V SPLIT
FORMING 2 POLE
INSTRUCTIONS IN QIG
TESTED OK
240930787
CTRL Wiring
C1/C2
1:CTRL(L)
2:CTRL(H)
3:CTRL(G)
4:NOT USED
DRAIN
C3
Strip Length
5/16"
Scale 1:1