

HTE# 10-5-23835R

Harnett County Department of Public Health Improvement Permit

26010

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: CUMBERLAND HOMES INC PROPERTY LOCATION: NC 27W
 NEW REPAIR EXPANSION SUBDIVISION: MIRE BRANCH LOT # 59
 Type of Structure: SFD (52x56) Site Improvements required prior to Construction Authorization Issuance:
 Proposed Wastewater System Type: PUMP TO 25% REDUCTION
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well 100 feet Permit valid for: Five years
 Permit conditions: No expiration

Authorized State Agent: [Signature] REMS Date: 4/7/10 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: CUMBERLAND HOMES INC PROPERTY LOCATION: NC 27W
 Facility Type: SFD (52x56) New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** PUMP TO 25% REDUCTION (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable)
PUMP TO 25% REDUCTION (Repair)

Installation Requirements/Conditions
 Septic Tank Size 1000 gallons Number of trenches 3
 Pump Tank Size 1000 gallons Exact length of each trench 80 feet
 Trenches shall be installed on contour at a Trench Spacing: 9 Feet on Center
 Maximum Trench Depth of: 12-14 inches Soil Cover: 6 inches
 (Trench bottoms shall be level to +/- 1/4" in all directions) (Maximum soil cover shall not exceed 36" above the trench bottom)
 Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: _____ inches below pipe
 _____ inches above pipe
 _____ inches total

Conditions: MINIMUM OF 6" OF COVER NEEDED OVER DRAINFIELD. WATER LINE MUST BE 10' FROM SEPTIC SYSTEM THIS PERMIT BASED ON A PROPOSAL FROM APPLICANTS SOIL SCIENTIST.

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.
 Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] REMS Date: 4/7/10
 Construction Authorization Expiration Date: 4/7/15

HTE# 10-5-23835R


Permit # 26010

Harnett County Department of Public Health Site Sketch

ISSUED TO: CUMBERLAND HOMES INC PROPERTY LOCATION: NC27W
SUBDIVISION MIRA BRANCH LOT # 59

Authorized State Agent: ~~REHS (OLIVER TOLKSDORF)~~ Date: 4/7/10

*SYSTEM FLAGGED
*IF FLAGS ARE NOT THERE CALL TO HAVE SYSTEM REFLAGGED PRIOR TO INSTALLATION

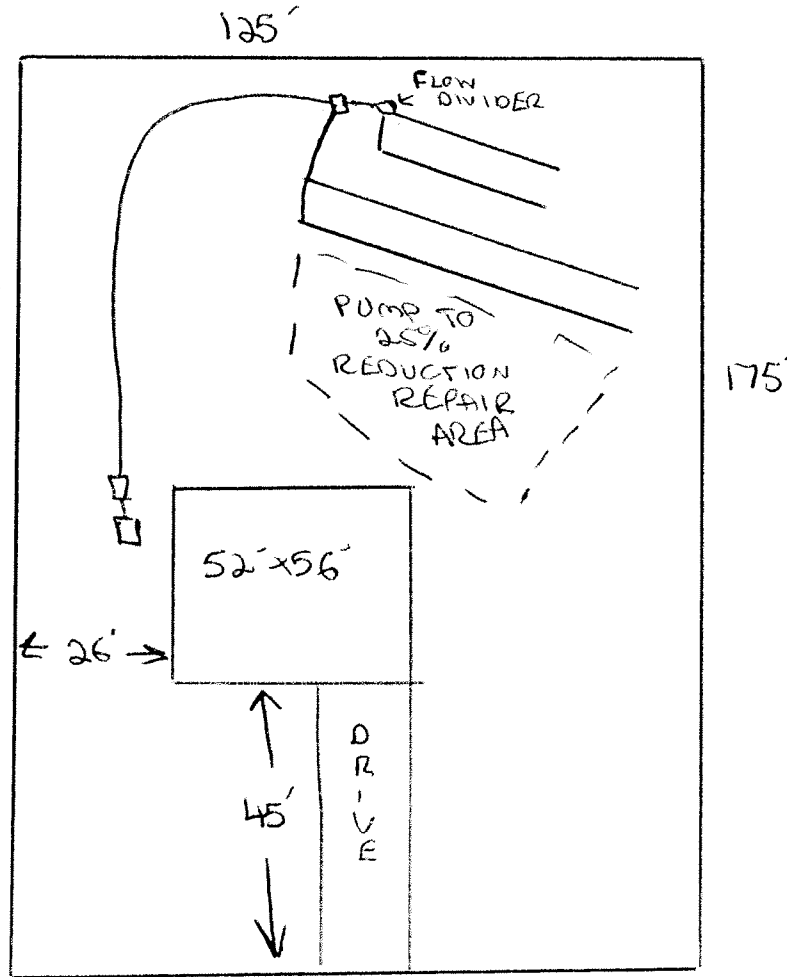

SUNRISE DR