HTE# 10-5-23871

## Harnett County Department of Public Health

25926

Improvement Permit

A building permit cannot be issued with only an Improvement Permit PROPERTY LOCATION: SIERRA TRAIL ISSUED TO: SHAW CONSTRUCTION CO. INC. SUBDIVISION STERRA VILLAGE & OVERHILLS LOT # 13 Site Improvements required prior to Construction Authorization Issuance: Type of Structure: SFD (56×54' Proposed Wastewater System Type: Conversional Projected Daily Flow: \_\_\_ 360 GPD Number of Occupants: 6 max Number of bedrooms: Basement Yes No Pump Required: ☐Yes ☐ No May be required based on final location and elevations of facilities Type of Water Supply: 
Community Public Well Distance from well 100 feet Five years Permit valid for: Permit conditions: ☐ No expiration The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.. Construction Authorization (Required for Building Permit) The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958. and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout. ISSUED TO: SHOW CONSTRUCTION CO. ) NC. PROPERTY LOCATION: SIERRA TRAIL SUBDIVISION SIERRA VILLAGE @ OVERHILLS LOT # 13 Facility Type: SFD (56×54) Basement? Yes No Basement Fixtures? Yes Conversional (Initial) Wastewater Flow: 360 Type of Wastewater System\*\* (See note below, if applicable []) PUMP TO CONVENTIONAL Installation Requirements/Conditions Number of trenches Septic Tank Size 1000 gallons Trench Spacing: 9 Feet on Center Exact length of each trench 75 Pump Tank Size \_\_\_\_ gallons Trenches shall be installed on contour at a Soil Cover: 28 Maximum Trench Depth of: 40 (Maximum soil cover shall not exceed (Trench bottoms shall be level to +/-1/4" MAX 36" above the trench bottom) in all directions) Pump Requirements: \_\_\_\_\_ft. TDH vs. Conditions: WAREA LINE MUST BE 10 From SEPTIC SYSTEM. \*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit. Owner/Legal Representative Signature: \_ This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH Authorized State Agent: \_ Construction Authorization Expiration Date: 3

HTE#	10	-5-	23871	


Permit # 25926

## Harnett County Department of Public Health Site Sketch

PROPERTY LOCATON: 6, ESCA TRAIL

SUBDIVISION SIERRA VILLACER OVERZHILLS LOT # 13

Authorized State Agent: Date: 3/15/10

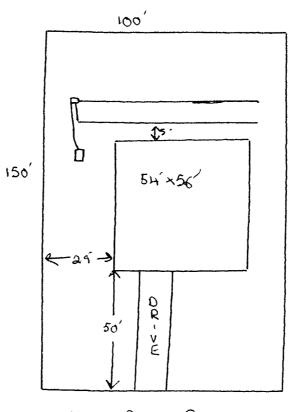

NORTH DAKOTA CT