

HTE# 10-5-24078

Harnett County Department of Public Health

26022

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: WILLIAM ELMORE PROPERTY LOCATION: MEADOW RIDGE DR
 SUBDIVISION MEADOW RIDGE LOT # 49
 NEW REPAIR EXPANSION
 Type of Structure: SFD (63'x41') Site Improvements required prior to Construction Authorization Issuance:
 Proposed Wastewater System Type: 25% REDUCTION SYSTEM
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well 100 feet Permit valid for: Five years
 No expiration
 Permit conditions: _____

Authorized State Agent: [Signature] Date: 4/20/10 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: WILLIAM ELMORE PROPERTY LOCATION: MEADOW RIDGE DR
 SUBDIVISION MEADOW RIDGE LOT # 49
 Facility Type: SFD (63'x41') New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% REDUCTION SYSTEM (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable
25% REDUCTION SYSTEM (Repair)

Installation Requirements/Conditions
 Septic Tank Size 1000 gallons
 Pump Tank Size _____ gallons
 Number of trenches 5
 Exact length of each trench 60 feet
 Trenches shall be installed on contour at a
 Maximum Trench Depth of: 12-14 inches
 (Trench bottoms shall be level to +/- 1/4"
 in all directions)
 Pump Requirements: _____ ft. TDH vs. _____ GPM
 _____ inches below pipe
 Aggregate Depth: _____ inches above pipe
 _____ inches total

Conditions: FRENCH DRAIN REQUIRED SEE SITE SKETCH FOR SPECIFICATIONS;
6" OF COVER REQUIRED OVER DRAINFIELD; WATER LINE MUST BE 10' FROM SEPTIC
SYSTEM; NO UTILITIES MAY ENCRANCH ON INITIAL OR REPAIR AREA.

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.
 Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 4/20/10
 Construction Authorization Expiration Date: 4/20/15


HTE# 10-5-24078

Permit # 26022

Harnett County Department of Public Health Site Sketch

ISSUED TO: WILLIAM ELMORE PROPERTY LOCATOR: MEADOW RIDGE DR
SUBDIVISION MEADOW RIDGE LOT # 49

Authorized State Agent: ~~REAS (OLIVER TOLKSOEFF)~~ Date: 4/20/10

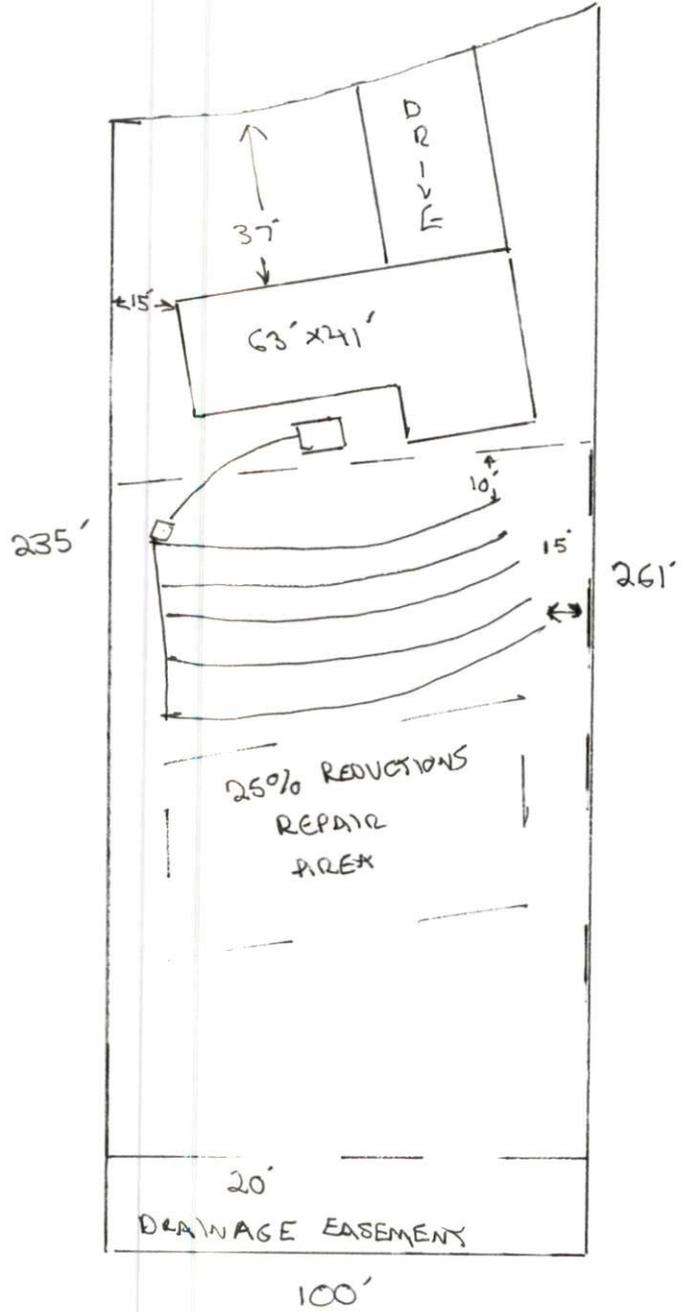

* FRENCH DRAIN 1' WIDE
24" DEEP
WILL RUN OUT AT SURFACE
NEAR REAR DRAINAGE
EASEMENT