

HTE# 16-5-24257

Harnett County Department of Public Health

26058

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Comfort Homes Inc PROPERTY LOCATION: 521412 Christen Light RD
 NEW REPAIR EXPANSION SUBDIVISION: Forest Trails LOT # 107
 Type of Structure: SFD Site Improvements required prior to Construction Authorization Issuance:
 Proposed Wastewater System Type: 25% REDUCED (ACCEPTED)
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well _____ feet Permit valid for: Five years
 Permit conditions: _____ No expiration

Authorized State Agent: [Signature] Date: 7-9-10 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Comfort Homes Inc PROPERTY LOCATION: 521412 Christen Light RD
 SUBDIVISION: Forest Trails LOT # 107
 Facility Type: SFD New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** Monitor to 25% REDUCED System (ACCEPTED) (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable)
Monitor to 25% REDUCED (Repair)
 Installation Requirements/Conditions
 Septic Tank Size 1000 gallons
 Pump Tank Size 1000 gallons
 Number of trenches 1
 Exact length of each trench 300 feet
 Trench Spacing: 9 Feet on Center
 Trenches shall be installed on contour at a
 Maximum Trench Depth of: 30" inches
 (Trench bottoms shall be level to +/- 1/4"
 in all directions)
 Soil Cover: 6 inches
 (Maximum soil cover shall not exceed
 36" above the trench bottom)
 Pump Requirements: _____ ft. TDH vs. _____ GPM
 Aggregate Depth: 6 inches below pipe
2 inches above pipe
12 inches total
 Conditions: _____

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 7-9-10
 Construction Authorization Expiration Date: 7-9-15


HTE# 10-5-24259

Permit # 26058

Harnett County Department of Public Health Site Sketch

ISSUED TO: Comfort Home Inc PROPERTY LOCATOR: 501412 Christina Ln RD
SUBDIVISION: Forest Trails LOT # 107

Authorized State Agent: James L. Mendenhall Date: 7-9-10

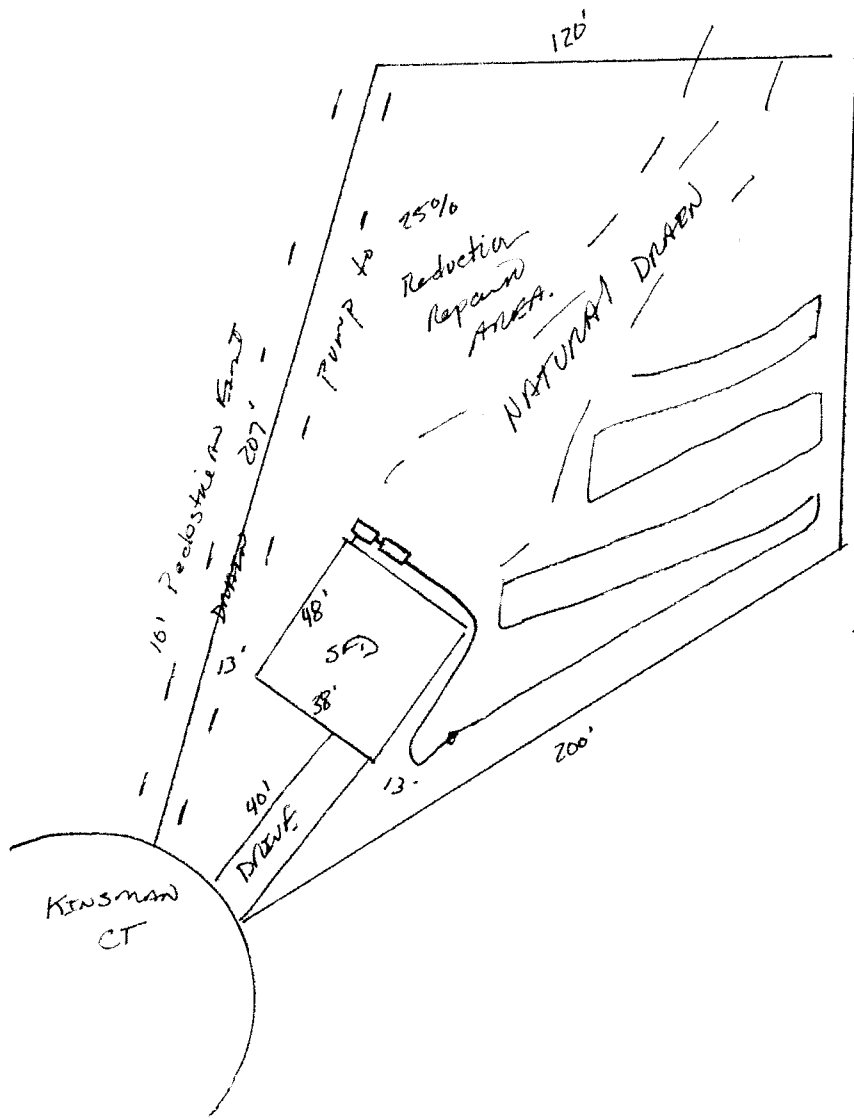

*START DRAIN LINE AT 30" DEEP RUN ON CONTOUR then slope to 18" and step down back to 30" deep -