

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

PROPERTY LOCATION: SR 1426 Cotton RD

ISSUED TO: S+S Contracting + Landscaping

SUBDIVISION _____ LOT # 1

NEW [x] REPAIR [] EXPANSION []

Site Improvements required prior to Construction Authorization Issuance:

Type of Structure: SFD

Proposed Wastewater System Type: 25% REDUCTION

Projected Daily Flow: 360 GPD

Number of bedrooms: 3 Number of Occupants: 6 max

Basement [] Yes [x] No

Pump Required: [] Yes [] No [x] May be required based on final location and elevations of facilities

Type of Water Supply: [] Community [x] Public [] Well Distance from well _____ feet

Permit valid for: [x] Five years

Permit conditions: Contractor to meet on site prior to install.

[] No expiration

Authorized State Agent: James E. Markant

Date: 5-25-10

SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: S+S Contracting + Landscaping

PROPERTY LOCATION: SR 1426 Cotton RD

SUBDIVISION _____ LOT # 1

Facility Type: SFD [x] New [] Expansion [] Repair

Basement? [] Yes [x] No Basement Fixtures? [] Yes [x] No

Type of Wastewater System** 25% REDUCTION SYSTEM (Initial) Wastewater Flow: 360 GPD

(See note below, if applicable [])

MANITEX TO 25% REDUCTION (Repair)

Installation Requirements/Conditions

Septic Tank Size 1000 gallons

Pump Tank Size _____ gallons

Number of trenches 1

Exact length of each trench 300 feet

Trenches shall be installed on contour at a

Maximum Trench Depth of: 18-3/16 inches

(Trench bottoms shall be level to +1-1/4"

in all directions)

Trench Spacing: 9 Feet on Center

Soil Cover: 6 inches

(Maximum soil cover shall not exceed

36" above the trench bottom)

Pump Requirements: _____ ft. TDH vs. _____ GPM

Aggregate Depth: 6 inches below pipe

2 inches above pipe

Conditions: Contractor to meet on site prior to install.

12 inches total

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This

Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

SEE ATTACHED SITE SKETCH

Authorized State Agent: James E. Markant

Date: 5-25-10

Construction Authorization Expiration Date: 5-25-15

HTE# 10-5-24331R

Permit # 25750

Harnett County Department of Public Health Site Sketch

PROPERTY LOCATON: JR1426 Cotton RD


ISSUED TO: S+S Contracting + Landscaping SUBDIVISION _____

LOT # 1

Authorized State Agent: James E. Marshall

Date: 5-25-10

- * Contractor to meet ON SITE prior to install.
- * RUN power LINE AS illustrated.
- * W/L + P/L WILL HAVE to be demonstrated prior to final issue.

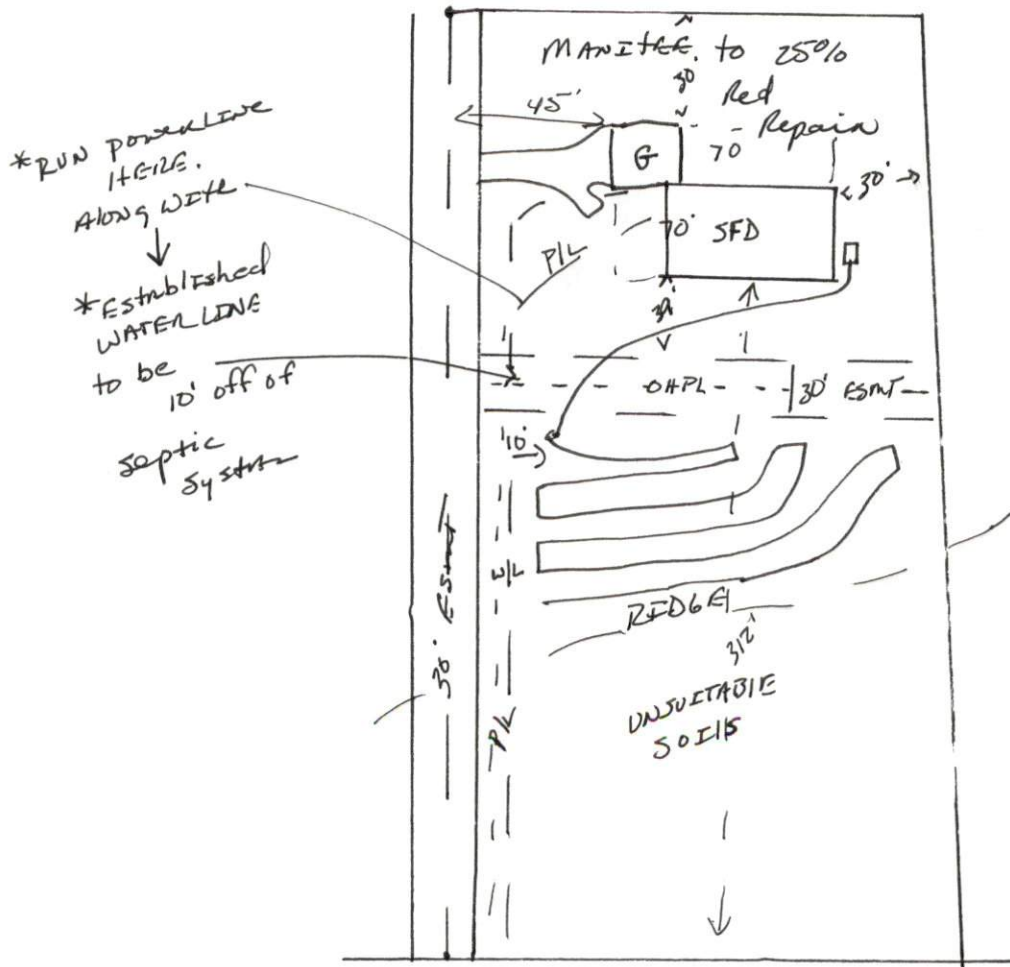

JR1426 Cotton RD