

HTE# 11-5-28018

Harnett County Department of Public Health

Improvement Permit

26868

A building permit cannot be issued with only an Improvement Permit

PROPERTY LOCATION: PONDEROSA RD

ISSUED TO: CUMBERLAND HOMES INC SUBDIVISION CAROLINA SEASONS LOT # 27

NEW REPAIR EXPANSION

Site Improvements required prior to Construction Authorization Issuance:

Type of Structure: SFO (49'x47')

Proposed Wastewater System Type: 25% REDUCTION SYSTEM

Projected Daily Flow: 480 GPD

Number of bedrooms: 4 Number of Occupants: 8 max

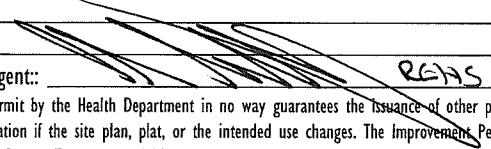
Basement Yes No

Pump Required: Yes No May be required based on final location and elevations of facilities

Type of Water Supply: Community Public Well Distance from well 100 feet

Permit valid for: Five years
 No expiration

Permit conditions:

Authorized State Agent: 

REAS

Date: 1/9/12

SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: CUMBERLAND HOMES INC

PROPERTY LOCATION: PONDEROSA RD

SUBDIVISION CAROLINA SEASONS LOT # 27

Facility Type: SFO (49'x47') New Expansion Repair

Basement? Yes No Basement Fixtures? Yes No

Type of Wastewater System** 25% REDUCTION SYSTEM (Initial) Wastewater Flow: 480 GPD

(See note below, if applicable)

25% REDUCTION SYSTEM (Repair)

Installation Requirements/Conditions

Number of trenches 4

Septic Tank Size 1000 gallons

Exact length of each trench 50 feet

Trench Spacing: 9 Feet on Center

Pump Tank Size _____ gallons

Trenches shall be installed on contour at a

Soil Cover: 6-12 inches

Maximum Trench Depth of: 18-24 inches

(Maximum soil cover shall not exceed 36" above the trench bottom)

(Trench bottoms shall be level to +/-1/4" in all directions)

Pump Requirements: _____ ft. TDH vs. _____ GPM

Aggregate Depth: _____ inches below pipe

_____ inches above pipe

Conditions: _____

_____ inches total

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____

Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This

Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

SEE ATTACHED SITE SKETCH

Authorized State Agent: 

REAS

Date: 1/9/12

Construction Authorization Expiration Date: 1/9/17

HTE# 11-5-28018

Permit # 26868

Harnett County Department of Public Health Site Sketch

ISSUED TO: CUMBERLAND HOMES INC PROPERTY LOCATOR: PONDEROSA RD
SUBDIVISION CAROLINA SEASONS LOT # 27

Authorized State Agent: ~~REAS (OLIVER TOLKSDORF)~~ Date: 1/9/12

