

HTE# 12-5-28802R

Harnett County Department of Public Health

Improvement Permit

27038

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: J.A. Johnson Construction PROPERTY LOCATION: Hwy 421
 NEW REPAIR EXPANSION SUBDIVISION: BRT LOT # 2
 Type of Structure: SFD Site Improvements required prior to Construction Authorization Issuance: _____
 Proposed Wastewater System Type: 25% REDUCED System
 Projected Daily Flow: 480 GPD
 Number of bedrooms: 4 Number of Occupants: 8 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well _____ feet Permit valid for: Five years
 Permit conditions: _____ No expiration

Authorized State Agent: James E. Markham Date: 9-10-12 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: J.A. Johnson Construction PROPERTY LOCATION: Hwy 421
 Facility Type: SFD New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% REDUCED System (Initial) Wastewater Flow: 480 GPD
 (See note below, if applicable)
Pump to 25% REDUCED (Repair)
Installation Requirements/Conditions
 Septic Tank Size 1200 gallons Number of trenches 2 OR 3
 Pump Tank Size _____ gallons Exact length of each trench 200 or 133 feet Trench Spacing: 9 Feet on Center
 Trenches shall be installed on contour at a Maximum Trench Depth of: 24-28 inches Soil Cover: 6 inches
 (Trench bottoms shall be level to +/- 1/4" in all directions) (Maximum soil cover shall not exceed 36" above the trench bottom)
 Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: 6 inches below pipe
 Conditions: _____ 2 inches above pipe
12 inches total

WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____
 This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: James E. Markham Date: 9-10-12
 Construction Authorization Expiration Date: 9-10-17


HTE# 12-5-2880212

Permit # 27038

Harnett County Department of Public Health Site Sketch

ISSUED TO: J.A. Johnson Construction PROPERTY LOCATOR: Hwy 421 SUBDIVISION: BAT LOT # 2

Authorized State Agent: James E. Martin 12345 Date: 9-10-12

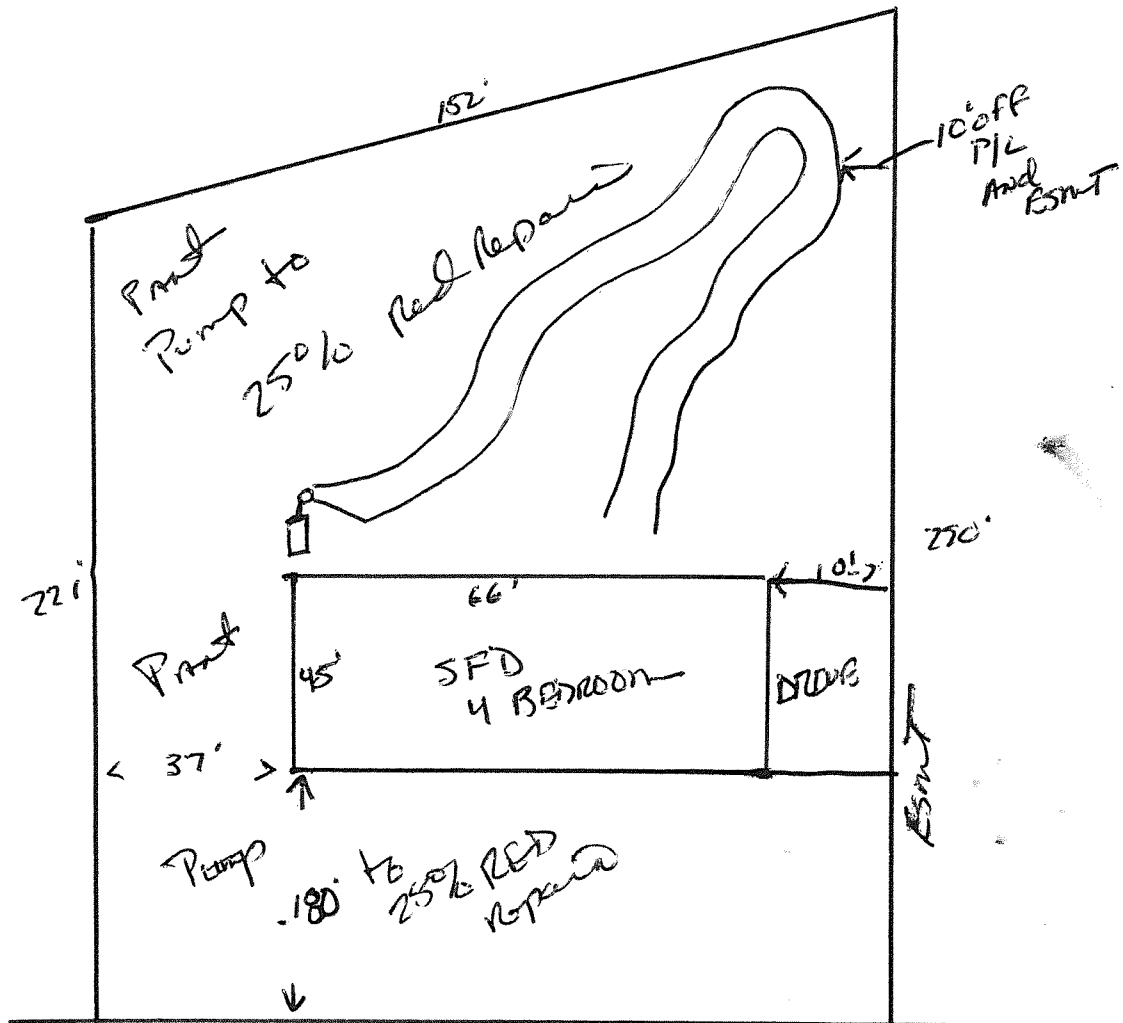

Hwy 421 → SOUTH - ERWEN