

DO NOT CUT, DRILL, NOTCH, OR OTHERWISE DAMAGE TRUSSES. Contact your RFS Representative for assistance PRIOR TO modifying any truss.

Espanol - NO CORTE, PERFORO, HAGA MUESCAS O DANE DE CUALQUIER OTRA MANERA LAS TRUSSES (CERCHAS DE MADERA). Contacte a su representante de RFS para asistencia ANTES de realizar cualquier modificación.

1. This Truss Placement Diagram is intended to serve as a guide for truss installation. This Diagram has been prepared by a Truss Technician and is not an engineered drawing.

2. The responsibilities of the Owner, Building Designer, Contractor, Truss Designer, and Truss Manufacturer shall be as defined by the TPI 1 National Standard.

3. The wood components shown on this diagram are to be used in dry service (moisture content 19%) and non-toxic environmental applications. The metal plates and hangers are galvanized to the 558 Standard unless noted otherwise.

4. Refer to the Truss Design Drawings for specific information about each individual truss design.

5. The Truss Technician shall provide Truss-to-Truss Connection Requirements. Any special or other connection shall be the responsibility of the Building Designer.

6. The Truss Placement Diagram and Truss Design Drawings are the property of Builders FirstSource and may not be reused or reproduced in part or in total under any circumstances without prior written authorization.

7. In some cases, field framing may be required to achieve the final appearance shown on the Construction Documents.

8. Field framing, including valley rafters, installed over roof trusses shall have a knee brace from the rafter to the truss top chord at intervals of 48" on center (O.C.) or less. Sagger knee braces from adjacent rafters such that the load is distributed uniformly over multiple truss locations and not concentrated at one location or along one truss.

9. Truss Top Chords shall be fully sheathed or have lateral bracing (struts) spaced at 24" O.C. or less. Truss Bottom Chord Bracing shall not exceed the maximum shown on the Truss Design Drawing. Field Braced bottom chord floor or ceiling attachments shall be spaced at 24" O.C. or less. Proper Bracing prevents buckling of individual truss members due to design loads.

10. This Placement Diagram is based upon the supporting structure being structurally adequate. Dimensions are correct, square, plumb, and level to adequately support the trusses. The foundation design, structural member sizing, load transfer, bearing conditions, and the structural compliance with the applicable building code are the responsibility of the Owner, Building Designer, and Contractor.

11. If Pigeonhole Trusses are included in this project, refer to the Metal Pigeonhole Connection Detail applicable for the project details and wind load category.

12. The Contractor shall follow the SCSA TTB Partition Separation Prevention and Solutions for truss attachment to non-load bearing walls and carefully complete these details to avoid gypsum wall board related issues.

WARNING:
TRUSSES MUST BE BRACED DURING INSTALLATION. FAILURE TO DO SO MAY RESULT IN INJURY OR DEATH.

Espanol - (TRUSSES) CERCCHAS DEBERAN TENER UN SOPORTE DURANTE LA INSTALACION. NO HACERLO PODRIA RESULTAR EN LESIONES O MUERTE!


1. Trusses shall be installed in a safe manner meeting all code, local, OSHA, TPI, and RFS Specifications. Failure to follow these specifications may result in injury or death.

2. Buildings under construction are vulnerable to high winds and present a possible safety hazard. The Contractor is responsible for recognizing adverse weather conditions and shall take appropriate action to prevent injury or death.

3. RFS INSTRUCTIONS SHALL BE FOLLOWED:

- BCSI-B1 = Safe Truss Handling and Installation
- BCSI-B2 = Installation and Temporary Restraint
- BCSI-B3 = Permanent Restraint
- BCSI-B4 = Safe Construction Loading
- BCSI-B5 = Truss Damage and Modification Guidelines
- BCSI-B7 = Floor Truss Installation
- BCSI-B8 = Toe-Nailed Connections
- BCSI-B9 = Maturity Grades
- BCSI-B10 = Post Frame Truss Installation
- BCSI-B11 = Fall Protection

4. Follow TPI Requirements for Long Span Trusses (P07).

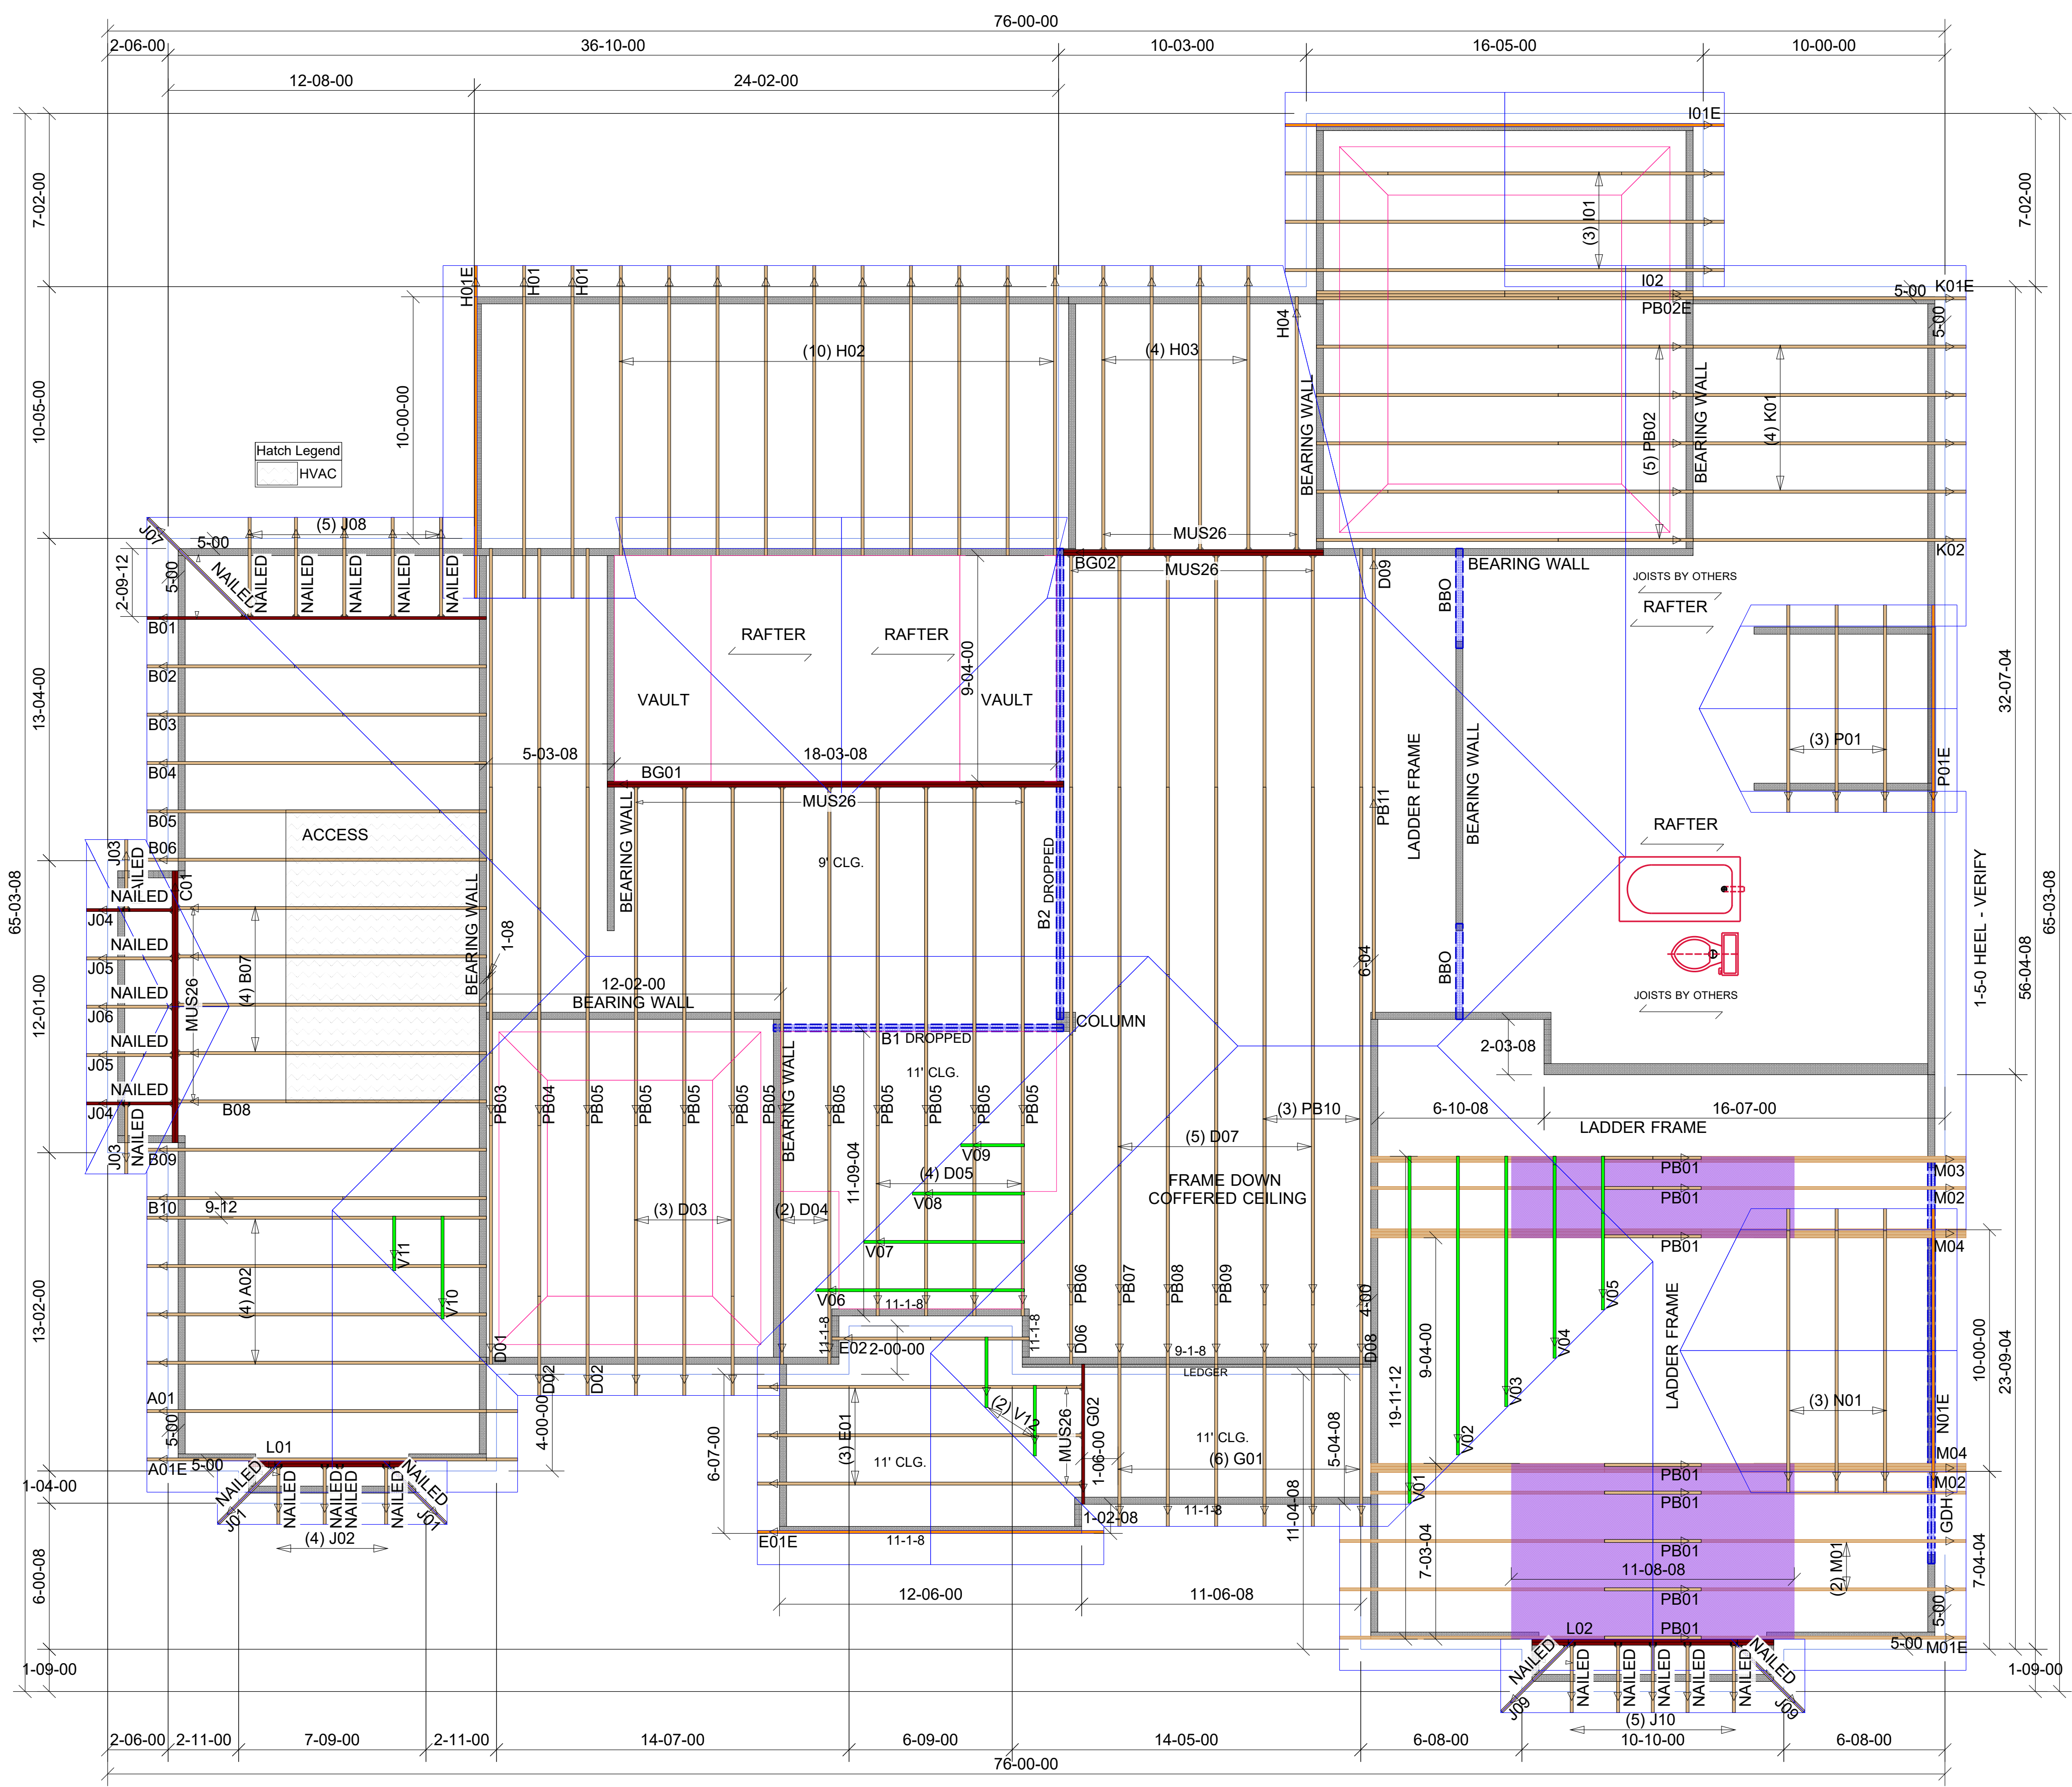

| Products | | | | | |
|----------|----------|---|--|-------|---------|
| PlotID | Length | Product | | Plies | Net Qty |
| B1 | 12-00-00 | 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP | | 2 | 2 |
| B2 | 20-00-00 | 1-3/4" x 16" VERSA-LAM® 2.0 3100 SP | | 2 | 2 |
| GDH | 18-00-00 | 1-3/4" x 18" VERSA-LAM® 2.0 3100 SP | | 2 | 2 |

| Truss Connector Total List | | |
|----------------------------|---------|-----|
| Manuf | Product | Qty |
| Simpson | MUS26 | 28 |
| Non-Proprietary | NAILED | 46 |

TOTAL ROOF AREA
5680.89 SQ FT

1/4" = 1'

Until this building is completely erected in accordance with plans, the trusses may be unstable and present a safety hazard. Truss instability may increase with building width, height, and length. Buildings under construction shall be braced in accordance with applicable building codes and standards. Truss design and installation shall be in accordance with applicable building codes and standards. Truss design and installation shall be in accordance with applicable building codes and standards. Truss design and installation shall be in accordance with applicable building codes and standards.

Builders FirstSource
Albemarle, NC

Customer Name: STURIZ HOMIES
Subdivision: LEIGH LAUREL
Leif: 23
Plan Name: PINEWOODROOTER
File Name: 1625532

Revisions:

| | |
|---------------|------------------|
| 1625532 | 1625532 |
| Drawn By: STG | DATE: 12/29/2018 |
| Page Number | 1 of 1 |