HTE# 12-5-29828

## Harnett County Department of Public Health

## **Improvement Permit**

27178

A building permit cannot be issued with only an Improvement Permit PROPERTY LOCATION: WIRE CO ISSUED TO: SOLVY HOMES SUBDIVISION KENLAN FARMS NEW 🔀 REPAIR . Site Improvements required prior to Construction Authorization Issuance: Type of Structure: 500 (56' ~43') Proposed Wastewater System Type: Pumpto 25% Reoution Projected Daily Flow: \_\_\_\_ Number of Occupants: 3 Number of bedrooms: Basement □Yes ≯ No Pump Required: ZXes ☐ May be required based on final location and elevations of facilities Type of Water Supply: 

Community Public 

Well Distance from well 100 feet Permit valid for: Five years Permit conditions: ■ No expiration REMS Date: 10 22 12 Authorized State Agent:

Date: 10 122 Y 2

SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit. **Construction Authorization** (Required for Building Permit) The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout. ISSUED TO: Severy Homes PROPERTY LOCATION: WIRE RD SUBDIVISION KENZAN FARMS LOT # 45 Facility Type: SFO (56 ×43) New 

Expansion 

Repair Basement? 
Yes No Basement Fixtures? 
Yes No

Type of Wastewater System\*\*

Pome to 25% Reduction System (Initial) Wastewater Flow: 480 GPD (See note below, if applicable □) To 25% REDUCTION (Renair) Number of trenches \_\_\_\_ **Installation Requirements/Conditions** Exact length of each trench 180 feet Trench Spacing: \_\_\_\_\_\_ Feet on Center Septic Tank Size 


→ ○ ○ gallons Soil Cover: 19-6 inches Pump Tank Size 1000 gallons Trenches shall be installed on contour at a Maximum Trench Depth of: 30-18 inches (Maximum soil cover shall not exceed (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) Pump Requirements: \_\_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM \_\_\_\_\_ inches below pipe Aggregate Depth: inches above pipe WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. \*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit. Owner/Legal Representative Signature: \_ This Construction Authorization is subject to revocation if the site plan, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This SEE ATTACHED SITE SKETCH Construction Authorization is subject to compliance with the provisions of this permit. Date: 10 22 Authorized State Agent:

Construction Authorization Expiration Date:

## Harnett County Department of Public Health Site Sketch

PROPERT	Y LOCATON: WIRE RO	
	BDIVISION KENZAN FARMS	LOT # <u>45</u>
Mul M	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	
Authorized State Agent: State Agent: OLIVE	Date: 10/02/12	

· IF ENTIRE LOS (S CLEARDED MOVE SYSTEM TO 10' OFF BACK PROPERTY LINE

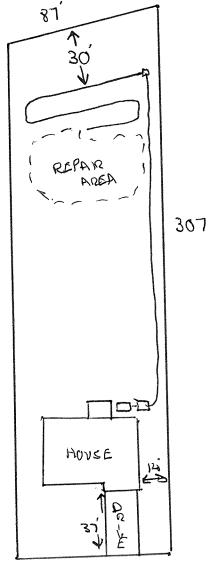

SHEPHARD DIL