HTE#<u>13-5-30744</u>

Harnett County Department of Public Health

Improvement Permit

27320

A building permit cannot be issued with only an Improvement Permit ISSUED TO: Stancil Builder SUBDIVISION / attor Point Site Improvements required prior to Construction Authorization Issuance: Type of Structure: SFD 48'x 4'6 Proposed Wastewater System Type: 25 % Reduction System Projected Daily Flow: 360 GPD Number of bedrooms: ______ Number of Occupants: ______ max Basement TYes Pump Required:

Yes ☑ No ☐ May be required based on final location and elevations of facilities Type of Water Supply:


Community Public

Well Distance from well _______ feet Five years Permit valid for: Permit conditions: ☐ No expiration Authorized State Agent: During Rell Date: 3/20/20/7 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.. **Construction Authorization** (Required for Building Permit) The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout. ISSUED TO: Stancil Builders PROPERTY LOCATION: Tingen Rd
SUBDIVISION Pattern Point LOT # 139 New ☐ Expansion ☐ Repair Basement? ☐ Yes ☑ No Basement Fixtures? ☐ Yes ☐ No 25% Reduction System (Initial) Wastewater Flow: 360 GPD Type of Wastewater System** (See note below, if applicable \square) Number of trenches ____/ Installation Requirements/Conditions Exact length of each trench 300 feet Trench Spacing: 9 Feet on Center Septic Tank Size /OOO gallons Soil Cover: 6-8 Pump Tank Size gallons Trenches shall be installed on contour at a Maximum Trench Depth of: 18-20 inches (Maximum soil cover shall not exceed (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) Pump Requirements: ft. TDH vs. GPM _____ inches below pipe Aggregate Depth: ______ inches above pipe inches total WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. **If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit. Owner/Legal Representative Signature: ___ This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This SEE ATTACHED SITE SKETCH Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. Authorized State Agent: / Construction Authorization Expiration Date: 3/20/2018

Harnett County Department of Public Health Site Sketch

. ^		PROPERTY LOCATON: 7 / ngen Rd	
SSUED TO: Stancil Bui	lder	SUBDIVISION Pattons Poin	f LOT # 139
authorized State Agent: Loupe	Main LEH	Date:	2/20/2017

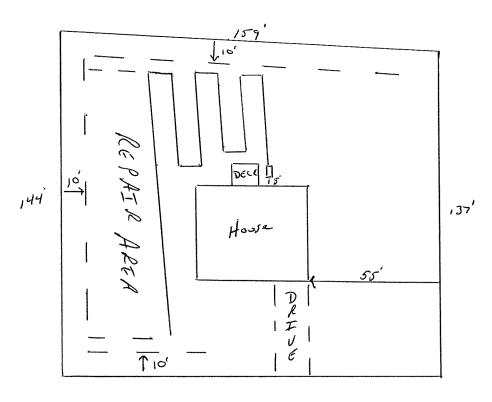

Homvee Court