HTE#13-5-30954

Harnett County Department of Public Health

Improvement Permit

27424

A building permit cannot be issued with only an Improvement Permit
ISSUED TO: BILL CLARK HOMES SUBDIVISION CAROLINA SEASONS LOT # 104
Type of Structure: SRO (58 × 58)
Proposed Wastewater System Type: 25% REDUCTION SYSTEM
Projected Daily Flow: 360 GPD
Number of bedrooms: 3 Number of Occupants: 6 max
Basement 🗆 Yes 🔀 No
Pump Required: 🗆 Yes 📉 No 🗆 May be required based on final location and elevations of facilities
Type of Water Supply: Community Public Well Distance from well 100 feet Permit valid for: Five years Permit conditions: No expiration
H 1 1 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1
Authorized State Agent:: SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holds is responsible for checking with appropriate governing bodies in meeting their requirements. The site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit
Construction Authorization
(Required for Building Permit)
the construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1955, .1955, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance
with the attached system layout.
ISSUED TO: BILL CLARK HOMES PROPERTY LOCATION: PONDEROSA RD SUBDIVISION CAROLINA SEASONS LOT #104
SUBDIVISION CAROLINA SEASONS LOT #104
Facility Type: SFO (55×58) New Expansion Repair
Basement? 🗆 Yes 🔀 No Basement Fixtures? 🗆 Yes 🔀 No
Basement? □ Yes No Basement Fixtures? □ Yes No Type of Wastewater System** <u> </u>
(See note below, if applicable □)
25% REOUCION SISTEM (Repair)
Installation Requirements/Conditions Number of trenches 3
Septic Tank Size 1000 gallons Exact length of each trench 40 feet Trench Spacing: 9 Feet on Center
Pump Tank Size gallons
Maximum Trench Depth of: 18-20 inches (Maximum soil cover shall not exceed
(Trench bottoms shall be level to +/-1/4" 36" above the trench bottom)
in all directions)
Pump Requirements:ft. TDH vs GPMinches below pi
Conditions: PERMIT BASED ON A PORPOSAL FROM PREZICANTS inches above pi
SOIL SCIENTIST
VATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. IO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.
*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.
Owner/Legal Representative Signature: Date:
his Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This
onstruction Authorization is suffice to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.
Authorized State Agent: Date: 479 17
Construction Authorization Expiration Date: 1 24 17

Harnett County Department of Public Health Site Sketch

Authorized State Agent:


PROPERTY LOCATON: PONDEROSA PO
SUBDIVISION CAROLINA SEASONS LOT # 104

PROPERTY LOCATON: PONDEROSA PO
SUBDIVISION CAROLINA SEASONS LOT # 104

PROPERTY LOCATON: PONDEROSA PO
SUBDIVISION CAROLINA SEASONS LOT # 104

PROPERTY LOCATON: PONDEROSA PO

Authorized State Agent: 41913

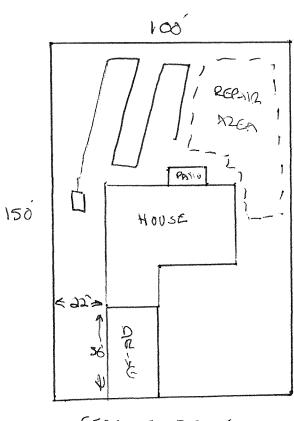

SEASONS DRIVE