

HTE# 13-5-31658

Harnett County Department of Public Health

27566

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Bernard F. Young PROPERTY LOCATION: Hwy 401 N
 NEW REPAIR EXPANSION SUBDIVISION: CLASSIC Cove LOT # 1
 Type of Structure: SFD Site Improvements required prior to Construction Authorization Issuance:
 Proposed Wastewater System Type: 75% REDUCED
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well _____ feet Permit valid for: Five years
 Permit conditions: Contractor to meet on site prior to install. No expiration

Authorized State Agent: James E. Manhart Date: 8-22-13 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Bernard F. Young PROPERTY LOCATION: Hwy 401 N
 SUBDIVISION: CLASSIC Cove LOT # 1
 Facility Type: SFD New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** Manhart to 75% REDUCED system (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable)
Manhart to 75% REDUCED (Repair)
 Installation Requirements/Conditions
 Septic Tank Size 1000 gallons Number of trenches 5
 Pump Tank Size 1000 gallons Exact length of each trench 70 feet Trench Spacing: 9 Feet on Center
5 X 1/2" sch 40 VALVES Trenches shall be installed on contour at a Soil Cover: 6 inches
 Maximum Trench Depth of: 30 -> 24 -> 18 inches (Maximum soil cover shall not exceed 36" above the trench bottom)
 (Trench bottoms shall be level to +/- 1/4" in all directions)
 Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: 4 inches below pipe
Contractor to meet on site prior to install. 2 inches above pipe
12 inches total

WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: James E. Manhart Date: 8-22-13
 Construction Authorization Expiration Date: 8-22-18

HTE# 13-5-31658


Permit # 27566

Harnett County Department of Public Health Site Sketch

ISSUED TO: Bernard F Young PROPERTY LOCATOR: 4610
SUBDIVISION: CLASSIC COVE LOT # 1

Authorized State Agent: James E Markham Date: 8-22-13

- * Contractor to meet ON SITE prior to INSTALL.
- * NO WATER OR POWER LINES IN SYSTEM OR Repair Area.

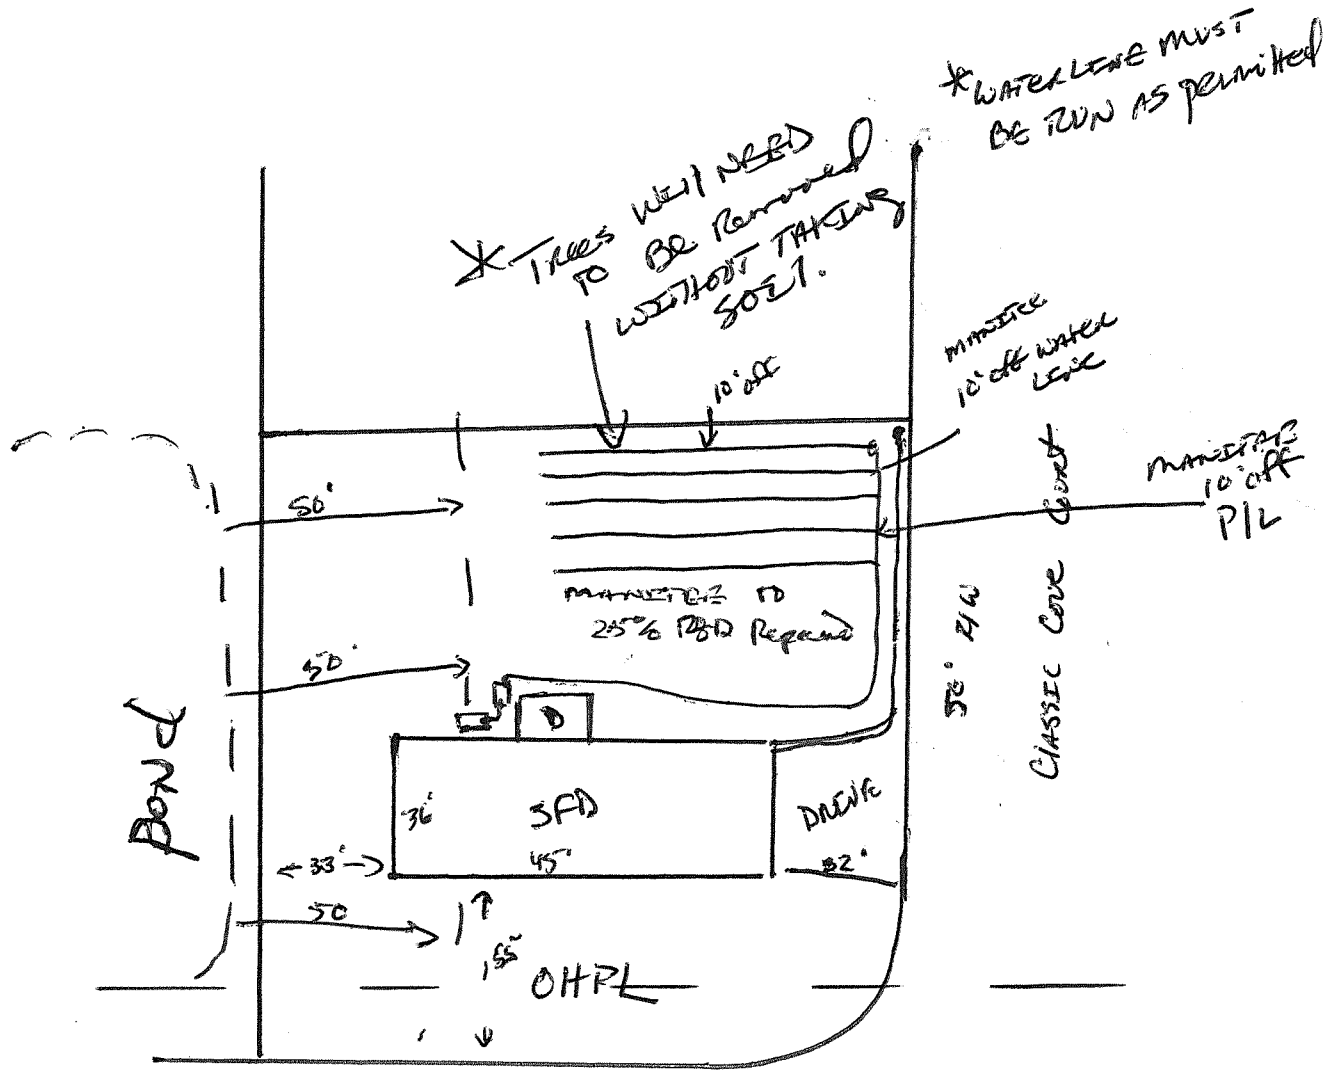

Hwy 401