

HTE# 14-5-3280R2

Harnett County Department of Public Health

27922

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: COMFORT HOMES PROPERTY LOCATION: RAWLS CHURCH RD
 NEW REPAIR EXPANSION SUBDIVISION: STETSON LOT # 3
 Type of Structure: SFD (64x47') Site Improvements required prior to Construction Authorization Issuance:
 Proposed Wastewater System Type: PUMP TO 25% REDUCTION
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well 100 feet Permit valid for: Five years
 No expiration
 Permit conditions: _____

Authorized State Agent: [Signature] Date: 4/15/14 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: COMFORT HOMES PROPERTY LOCATION: RAWLS CHURCH RD
 Facility Type: SFD (64x47') New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% REDUCTION SYSTEM (PUMP) (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable)
LRP (Repair)

Installation Requirements/Conditions

Septic Tank Size <u>1000</u> gallons	Number of trenches <u>4</u>	Exact length of each trench <u>75</u> feet	Trench Spacing: <u>9</u> Feet on Center
Pump Tank Size <u>1000</u> gallons	Trenches shall be installed on contour at a	Maximum Trench Depth of: <u>12</u> inches	Soil Cover: <u>6</u> inches
	(Trench bottoms shall be level to +/- 1/4" in all directions)	(Maximum soil cover shall not exceed 36" above the trench bottom)	

Pump Requirements: _____ ft. TDH vs. _____ GPM _____ inches below pipe
 Aggregate Depth: _____ inches above pipe
 Conditions: PERMITS BASED ON PROPOSAL FROM LSS. SEE SITE SKETCH FOR CONDITIONS. _____ inches total

WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____
 This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 4/15/14
 Construction Authorization Expiration Date: 4/15/19

HTE# 14-5-32850R2


Permit # 27922

Harnett County Department of Public Health Site Sketch


ISSUED TO: COMFORT HOMES PROPERTY LOCATOR: RAWLS CHURCH RD
SUBDIVISION STETSON LOT # 3

Authorized State Agent: ~~RENS (OLIVER TOLKSDORF)~~ Date: 4/15/14

- * MINIMUM OF 6" OF COVER NEEDED OVER DRAINFIELD.
- * NO CONSTRUCTION TRAFFIC ON DRAINFIELD AREA. FENCING ~~AROUND~~ FIELD AREA RECOMMENDED.

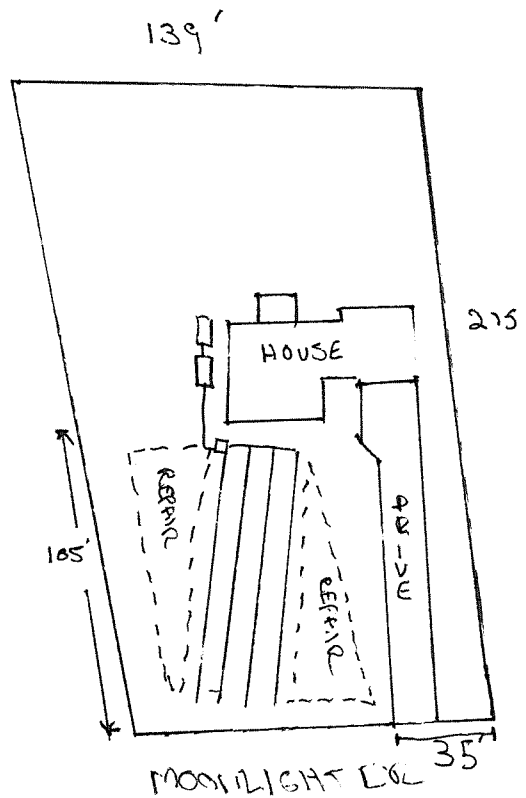

Stetson Lot 3

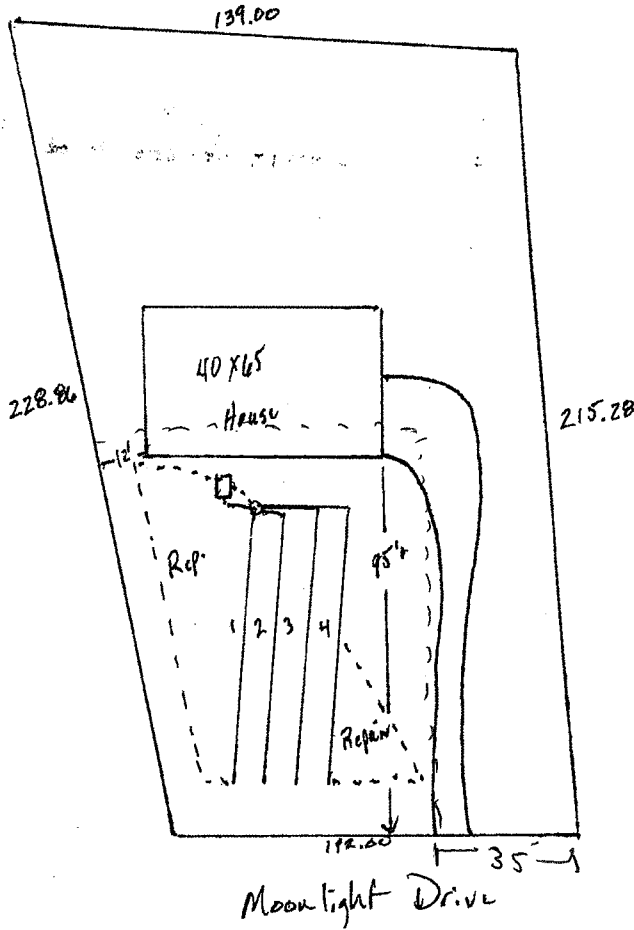

360 gpd @ .3 LTAR

	C	L
1	B	75
2	R	75
3	W	75
4	B	75

At Grade Accepted

Repair
LPP

