
Harnett County Department of Public Health

Improvement Permit

	A building permit cannot be issued with only an Improvem	ent Permit	
ISSUED TO: MICTON INVESTING	PROPERTY LOCATION: 89 VI	c Mcleod Ct., C	cats
	NOISING COLLECTION		LOT #
Type of Structure: SFD (65' X 43'	ANSION Site Improvements	required prior to Construction Author	ization Issuance:
	eduction		The state of the s
Projected Daily Flow:GPD			
Number of bedrooms: 3 Number of (Occupants: \(\begin{array}{c} \max \\ \max \end{array}		
Basement Ves 🔀 No			
Pump Required: Yes No May be	required based on final location and elevations of facilities		
Type of Water Supply: La Community Publi	c Well Distance from wellfeet	Permit valid for:	Five years
Permit conditions:			No expiration
Authorized State Agent:	- REHS-I Date: 9-13-19		
The issuance of this permit by the Health Denartment in no way of	tarantees the issues of all the state of the		CHED SITE SKETCH
site is subject to revocation if the site plan, plat, or the intended if	variances) the issuance of other permits. The permit holder is responsible for c use changes. The Improvement Permit shall not be affected by a change in ow litions of this permit	necking with appropriate governing bodies in n nership of the site. This permit is subject to co	meeting their requirements. This
the Laws and Rules for Sewage Treatment and Disposal and to conc	itions of this permit	, , , , , , , , , , , , , , , , , , , ,	omphance with the provisions of
	Construction Authorization		
71	(Required for Puilding Demis)		
The construction and installation requirements of Rules . 1950, . 1952 with the attached system layout.	1954, .1955, .1956, .1957, .1958. and .1959 are incorporated by reference	into this permit and shall be met. Systems st	hall be installed in accordance
ISSUED TO: Micron Investor	ents _ PROPERTY LOCATION 89	Vic Molecol Ct	Coats
	SUBDIVISION	VICTORIAL C	107.#
Facility Type: SFD 65 x 43	New Expansion Repair		LUI #
Basement? Yes No Basement F	ixtures? Yes No		
Type of Wastewater System**257, §	eduction	(Initial) Wassesser II	2()
(See note below, if applicable)		(Initial) Wastewater Flow:	OGC GPD
_257, V	eduction (Repair)		
Installation Requirements/Conditions	Number of trenches		
Septic Tank Size 1000 gallons	Exact length of each trench _ 75feet	Trench Spacing: 9 Fe	
Pump Tank Sizegallons	Trenches shall be installed on contour at a	6.1.6	eet on Center
	Maximum Trench Depth of: 18-24 inches		
	(Trench bottoms shall be level to +/-1/4"	(Maximum soil cover shall not	
	in all directions)	36" above the trench bottom)
Pump Requirements:ft. TDH vs	GPM		3-4
50 50 500000000000000000000000000000000		Aggregate Death	inches below pipe
Conditions:		Aggregate Depth:	
			,inches total
NATER LINES (INCLUDING IRRIGATION) MUST	BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR R	EDAID ADEA	
IO UTILITIES ALLOWED IN INITIAL OR REPAIR I	JEVIN EIELD VOEV	LPAIK AKEA.	
"Il applicable: I understand the system type specified	d is different from the type specified on the application.	I accept the specifications of this	permit
			<i>perime.</i>
Wher/Legal Representative Signature:		Date:	
to revocation in the site plan,	plat, of the intended use changes the construction Authorization shall and		hip of the site. This
Authorization is subject to compliance with the provisions of	f the Laws and Rules for Sewage Treatment and Disposal and to the condition		ACHED SITE SKETCH
\angle M	7-1		
uthorized State Agent:	Ch REHS-I Date:	9-13-19	
BrittanyAdams		e: 9-13-2024	-
			_ 1

Harnett County Department of Public Health Site Sketch

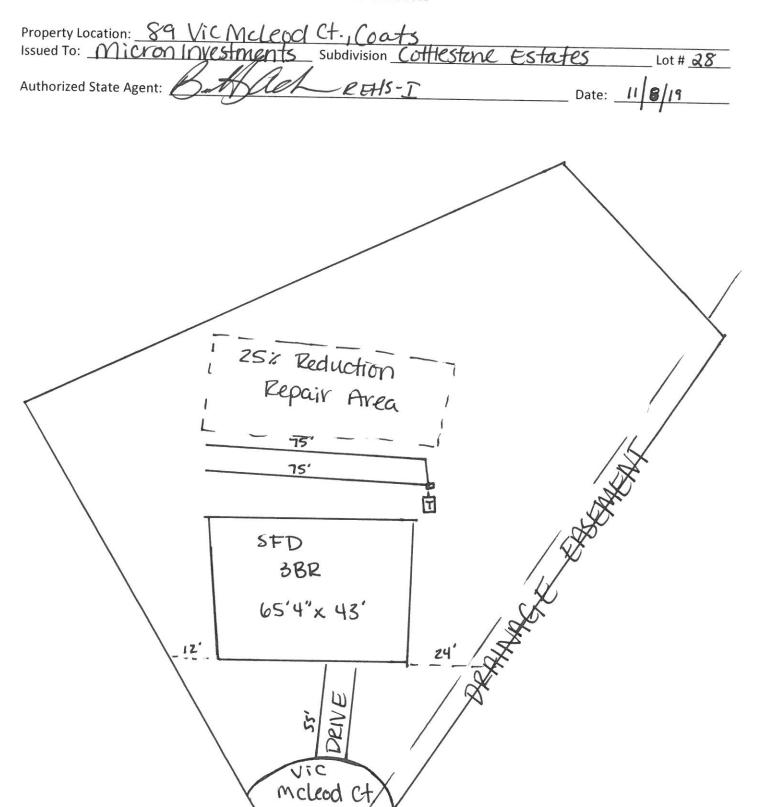

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.