Harnett County Department of Public Health


Improvement Permit

A building permit cannot be issued with only an Improvement Permit

A 0 0 D	PROPERTY LOCATION: 40 Starlic		
ISSUED TO: A&G Residential, LLC	subdivision New Horizons		LOT # 2
NEW REPAIR EXPANSION	Site Improvements re	quired prior to Construction Auth	norization Issuance:
Type of Structure: SFD 38'x68'			
Proposed Wastewater System Type: 25% Reduction			
Projected Daily Flow: 480 GPD			7
	max		
Basement Tyes X No			
Pump Required: Yes No May be required based on final to Type of Water Supply: Community Public Well Distan		Permit valid for:	Five years
Permit conditions:	ce nom wen leet	remint valid for.	No expiration
Fermit Conditions.			No expiration
Authorized State Agent: BALAA REHS	Date: 12/9/2019	SEE A	ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other			
site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement	Permit shall not be affected by a change in own	ership of the site. This permit is subject	to compliance with the provisions of
the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.			
<u> </u>	at A at the at		
<u>Lonstr</u>	uction Authorization		
(Reg	uired for Building Permit)		
The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957,	.1958. and .1959 are incorporated by references	into this permit and shall be met. Syste	ems shall be installed in accordance
with the attached system layout.			
ISSUED TO: A&G Residential, LLC	PROPERTY LOCATION: 40 S	tarlight Dr. Lillingto	n (SR1266)
issue to. Italian transfer and the second se	SUBDIVISION New Horiz		LOT # 2
Facility Type: SFD 38'x68'	Expansion Repair	0110	201 //
Basement? Yes No Basement Fixtures? Yes	No No		
	△ NO		
Tune of Wasterwater System** 25% Reduction		(Initial) Wassaurasa Flau	480 CDD
Type of Wastewater System** 25% Reduction		(Initial) Wastewater Flow	: 480 GPD
(See note below, if applicable)	/b = ' \	(Initial) Wastewater Flow	7: <u>480</u> GPD
(See note below, if applicable []) 25% Reduction	(Repair)	(Initial) Wastewater Flow	r: <u>480</u> GPD
(See note below, if applicable (1) 25% Reduction Installation Requirements/Conditions Number of trench	nes 4		
(See note below, if applicable) 25% Reduction Installation Requirements/Conditions Septic Tank Size 1000gallons Exact length of each of the second control of the sec	nes 4 each trench 65 feet	Trench Spacing: 9	Feet on Center
(See note below, if applicable) 25% Reduction Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches shall be	nes 4 each trench 65 feet installed on contour at a	Trench Spacing: 9 Soil Cover: 6	Feet on Center inches
(See note below, if applicable) 25% Reduction Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Trenches shall be	nes 4 each trench 65 feet	Trench Spacing: 9	Feet on Center inches
(See note below, if applicable) 25% Reduction Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Frenches shall be Maximum Trench	nes 4 each trench 65 feet installed on contour at a	Trench Spacing: 9 Soil Cover: 6	Feet on Center _inches I not exceed
(See note below, if applicable) 25% Reduction Installation Requirements/Conditions Septic Tank Size 1000 gallons Pump Tank Size gallons Frenches shall be Maximum Trench	nes 4 each trench 65 feet installed on contour at a Depth of: 18-20 inches	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shal	Feet on Center _inches I not exceed
(See note below, if applicable) 25% Reduction Installation Requirements/Conditions Septic Tank Size 1000gallons Pump Tank Sizegallons Fact length of empty and the standard part of trenches shall be maximum Trench (Trench bottoms in all directions)	nes 4 each trench 65 feet installed on contour at a Depth of: 18-20 inches	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shal 36" above the trench be	Feet on Center inches I not exceed ottom)
(See note below, if applicable) 25% Reduction Installation Requirements/Conditions Septic Tank Size 1000gallons Pump Tank Sizegallons Fact length of empty and the standard part of trenches shall be maximum Trench (Trench bottoms in all directions)	nes 4 each trench 65 feet installed on contour at a Depth of: 18-20 inches	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shal 36" above the trench be	Feet on Center inches I not exceed ottom) inches below pipe
(See note below, if applicable) 25% Reduction Installation Requirements/Conditions Septic Tank Size 1000gallons Pump Tank Sizegallons Frenches shall be Maximum Trench (Trench bottoms in all directions) Pump Requirements:ft. TDH vsGPM	nes 4 each trench 65 feet installed on contour at a Depth of: 18-20 inches shall be level to +/-1/4"	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shal 36" above the trench be	Feet on Centerinches not exceed ottom) inches below pipe inches above pipe
(See note below, if applicable) 25% Reduction Installation Requirements/Conditions Septic Tank Size 1000gallons Pump Tank Sizegallons Fact length of empty and the standard part of trenches shall be maximum Trench (Trench bottoms in all directions)	nes 4 each trench 65 feet installed on contour at a Depth of: 18-20 inches shall be level to +/-1/4"	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shal 36" above the trench be	Feet on Center inches I not exceed ottom) inches below pipe
(See note below, if applicable) 25% Reduction Installation Requirements/Conditions Septic Tank Size 1000gallons Pump Tank Sizegallons Maximum Trench (Trench bottoms in all directions) Pump Requirements: ft. TDH vsGPM Conditions:	nes 4 each trench 65 feet installed on contour at a Depth of: 18-20 inches shall be level to +/-1/4"	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shal 36" above the trench be addressed and addressed addressed and addressed and addressed and addressed and address	Feet on Centerinches not exceed ottom) inches below pipe inches above pipe
See note below, if applicable	nes 4 each trench 65 installed on contour at a Depth of: 18-20 inches shall be level to +/-1/4"	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shal 36" above the trench be addressed and addressed addressed and addressed and addressed and addressed and address	Feet on Centerinches not exceed ottom) inches below pipe inches above pipe
(See note below, if applicable) 25% Reduction Installation Requirements/Conditions Septic Tank Size 1000gallons Pump Tank Sizegallons Maximum Trench (Trench bottoms in all directions) Pump Requirements: ft. TDH vsGPM Conditions:	nes 4 each trench 65 installed on contour at a Depth of: 18-20 inches shall be level to +/-1/4"	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shal 36" above the trench be addressed and the second	Feet on Centerinches not exceed ottom) inches below pipe inches above pipe
(See note below, if applicable) 25% Reduction Installation Requirements/Conditions Septic Tank Size 1000gallons	nes 4 each trench 65 installed on contour at a Depth of: 18-20 inches shall be level to +/-1/4"	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shal 36" above the trench be Aggregate Depth:	Feet on Centerinches not exceed ottom) inches below pipe inches above pipe inches total
See note below, if applicable	nes 4 each trench 65 installed on contour at a Depth of: 18-20 inches shall be level to +/-1/4"	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shal 36" above the trench be Aggregate Depth:	Feet on Centerinches not exceed ottom) inches below pipe inches above pipe inches total
See note below, if applicable	nes 4 each trench 65 installed on contour at a Depth of: 18-20 inches shall be level to +/-1/4"	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shal 36" above the trench be Aggregate Depth:	Feet on Centerinches not exceed ottom) inches below pipe inches above pipe inches total
(See note below, if applicable) 25% Reduction Installation Requirements/Conditions Septic Tank Size 1000gallons	nes 4 each trench 65 feet installed on contour at a Depth of: 18-20 inches shall be level to +/-1/4" NY PART OF SEPTIC SYSTEM OR I	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shal 36" above the trench be Aggregate Depth: REPAIR AREA.	Feet on Centerinches Il not exceed ottom) inches below pipe inches above pipe inches total
See note below, if applicable	res 4 reach trench 65 reach tr	Irench Spacing: 9 Soil Cover: 6 (Maximum soil cover shall 36" above the trench be appropriate to the specifications of the specifica	Feet on Centerinches Il not exceed ottom) inches below pipe inches above pipe inches total
See note below, if applicable	res 4 reach trench 65 reach tr	Irench Spacing: 9 Soil Cover: 6 (Maximum soil cover shall 36" above the trench be appropriate to the specifications of the specifica	Feet on Centerinches not exceed ottom)
25% Reduction 25% Reductio	res 4 reach trench 65 reach tr	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shal 36" above the trench be above the trench be above the trench be above the trench be above the specifications of this permit. SE	Feet on Centerinches not exceed ottom)
See note below, if applicable	res 4 reach trench 65 reach tr	Trench Spacing: 9 Soil Cover: 6 (Maximum soil cover shall 36" above the trench be above the trench be above the trench be above the trench be above the specifications of this permit. SE 12/9/2019	Feet on Centerinches not exceed ottom)

Harnett County Department of Public Health Site Sketch

	R#1266)	
Issued To: Ad G RESIDENTICI, LLC Subdivision New HI	onzars	_Lot # _ Z
Authorized State Agent: But Add REHS	Date: <u>1</u> Z	19/19

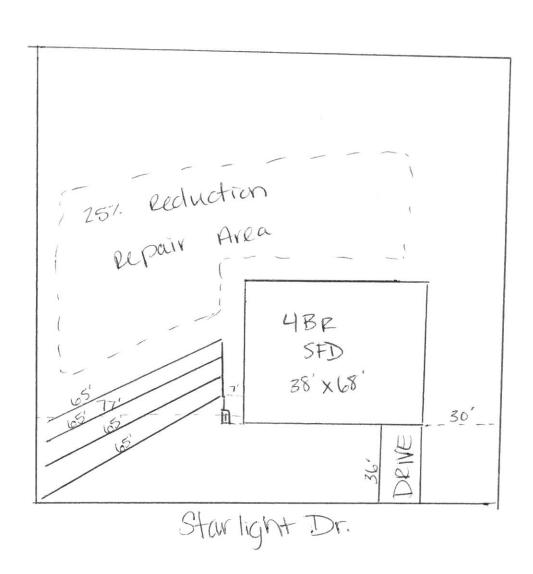

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.