Harnett County Department of Public Health

Improvement Permit


A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Tim & Katherine Clausen	PROPERTY LOCATION: 2493 SUBDIVISION	Hillmon Grove Rd, Ca	ameron SR1106
NEW REPAIR EXPANSION ■		ents required prior to Construction Aut	
Type of Structure: SFD 40'x30'			
Proposed Wastewater System Type: 25% Reduction			
Projected Daily Flow: 360 GPD Number of bedrooms: 3 Number of Occupants: 6	max		
Basement XYes No			
Pump Required: Yes No May be required based	on final location and elevations of facilities	5	
Type of Water Supply: Community Number Public Well	Distance from well fe	eet Permit valid for:	
Permit conditions:			No expiration
Authorized State Agent:	EHS-1 Date: 3/18/2020		ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in 30 way guarantees the issua site is subject to revocation if the site plan, plat, or the intended use changes. The In	nce of other permits. The permit holder is responsible	e for checking with appropriate governing bodie	es in meeting their requirements. This
the Laws and Rules for Sewage Treatment and Disposal and to conditions of this perm		e in ownersnip of the site. This permit is subject	t to compliance with the provisions of
	onstruction Authorization	n .	
	(Required for Building Permit)		
The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1964, .1955, .1964, .1964, .1964, .1	56, 1957, 1958 and 1959 are incorporated by re	elerences into this permit and shall be met. Syst	tems shall be installed in accordance
with the attached system layout.			
ISSUED TO: Tim & Katherine Clausen	PROPERTY LOCATION: 2	493 Hillmon Grove Ro	d, (SR1106)
055 401 001	SUBDIVISION		LOT #
Facility Type: SFD40'x30'	New Expansion R	lepair	
Basement? X Yes No Basement Fixtures? X	Yes No	7. 2.2 10 144	000
Type of Wastewater System** 25% Reduction (See note below, if applicable)		(Initial) Wastewater Flor	w: <u>360</u> GPD
25% Reduction	(Repair)		
	of trenches 3		
		feet Trench Spacing: 9	Feet on Center
· ·	shall be installed on contour at a	Soil Cover: 6	inches
Maximum	Trench Depth of: 18-24 in	nches (Maximum soil cover sha	II not exceed
(Trench	pottoms shall be level to +/-1/4"	36" above the trench b	oottom)
in all dir	ections)		
Pump Requirements:ft. TDH vsGPM			inches below pipe
Conditions		Aggregate Depth:	inches above pipe
Conditions:			inches total
WATER LINES (INCLUDING IRRICATION) MILET DE 10ET E	DOM ANY DART OF CERTIC CYCTEM	LOD DEDAID ADEA	
WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. F NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIEI		OK KEPAIK AKEA.	
SANDER - DAN DER MANDE AND AND MANDE AND			
**If applicable: 1 understand the system type specified is differen	t from the type specified on the appli	ication. I accept the specifications of	of this permit.
0 10 10			
Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the int	and the The Country And the Country	Date:	
Construction Authorization is subject to revocation if the site prain, prait, or the int	-		EE ATTACHED SITE SKETCH
	and propose and to the	The second of the points.	THE STATE STATE STATES
// 11 m			
Authorized State Agent:	RETEI	Date: 3/18/2020	

Application # SFD 2003-0002

Harnett County Department of Public Health Site Sketch

Property Location: 2493 Hillmon GROVE Rd, Cameron		
Issued To: Time Katherne Clausen Subdivision_		Lot #
Authorized State Agent: BALAM REHS-T	_ Date:	3/16/2020

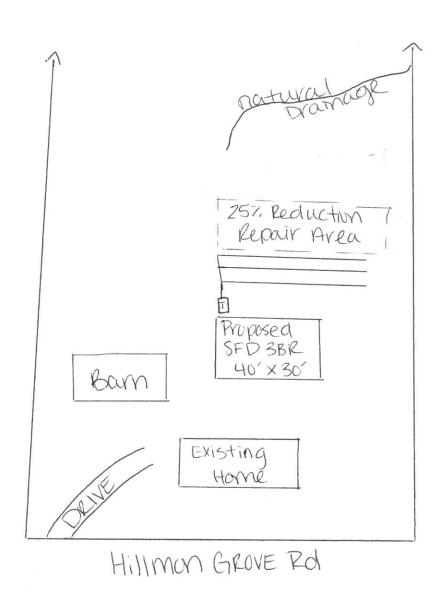

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.