

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: ROYAL OAKS BLDG. GRP. PROPERTY LOCATION: ATKINS RD. SUBDIVISION: ATKINS VILLAGE LOT # 32. Type of Structure: SFD (45x67). Proposed Wastewater System Type: 25% REDUCTION SYSTEM. Projected Daily Flow: 480 GPD. Number of bedrooms: 4. Number of Occupants: 8 max. Permit valid for: Five years.

Authorized State Agent: [Signature] Date: 7/18/16 SEE ATTACHED SITE SKETCH. The issuance of this permit by the Health Department in no way guarantees the issuance of other permits.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met.

ISSUED TO: ROYAL OAKS BLDG. GRP. PROPERTY LOCATION: ATKINS RD. SUBDIVISION: ATKINS VILLAGE LOT # 32. Facility Type: SFD (45x67). Type of Wastewater System: 25% REDUCTION SYSTEM. (Initial) Wastewater Flow: 480 GPD. Installation Requirements/Conditions: PANGEL BLOCK (Repair).

Installation Requirements/Conditions: Septic Tank Size 1000 gallons, Pump Tank Size [redacted] gallons, Number of trenches 3, Exact length of each trench 100 feet, Trench Spacing: 9 Feet on Center, Soil Cover: 12 inches. Conditions: PERMIT BASED ON PROPOSAL FROM APPLICANTS LSS.

WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.


Owner/Legal Representative Signature: [Signature] Date: [Blank]

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 7/18/16 Construction Authorization Expiration Date: 7/18/21


Atkins Village, Lot 32  
 4-Bedroom Septic System Layout  
 May 2016

1256 16-539,89  
 Permit # 28924

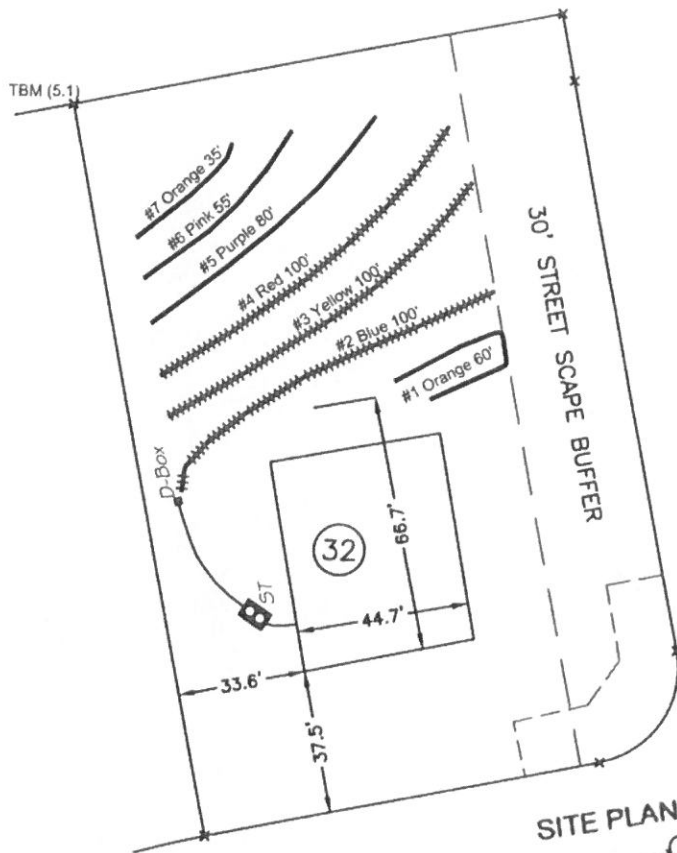

SITE PLAN APPROVAL  
 DISTRICT RA30 USE SFD  
 #BEDROOMS 4  
12/1/16 ZONING ADMINISTRATOR

- \*Keep Tanks and Drain lines 10' from property lines.
- \*Not a Survey
- \*Not a guarantee of a septic permit.
- \*Keep supply lines >5' from property lines.
- \*Some lines are flagged longer in the field than lengths indicated above.
- \*No foundation drains.



System: Gravity to D-Box  
 Lines: 2-4, (300')  
 0.4 Soil LTAR  
 24" Trench Bottom  
 Accepted Status System

Repair: T & J panel  
 Lines: 1, 5-7, (230')  
 0.4 Soil LTAR  
 36" Trench Bottom  
 Accepted Status System

GRAPHIC SCALE  
 1" = 50'



Central Carolina  
 Soil Consulting  
 919-569-6704  
 Project # 1953