

ADDRESS : 56 FARRAH-SHEA WAY
CONTRACTOR : CUMBERLAND HOMES INC
OWNER : BARCO DEVELOPMENT INC
PARCEL : 04-0662- - -0024- -22-
APPL NUMBER: 16-50039488 CP NEW RESIDENTIAL (SFD)
DIRECTIONS : T/S: 08/16/2016 09:20 AM JBROCK ----
FARRAH SHEA WAY LOT 18
BRIAN KEITH MEADOWS

SUBDIV: BRIAN KEITH MEADOW 25LOTS
PHONE : (910) 892-4345
PHONE :

STRUCTURE: 000 000 56X40 3BDR SLAB W/ GARAGE

FLOOD ZONE : FLOOD ZONE X
BEDROOMS : 3000000.00
SEPTIC - EXISTING? : NEW TANK

PROPOSED USE : SFD
WATER SUPPLY : COUNTY

PERMIT: CPSF 00 CP * SFD

TYP/SQ	REQUESTED COMPLETED	INSP RESULT	DESCRIPTION RESULTS/COMMENTS
B101 01	10/26/16 10/26/16	BS CA	R*BLDG FOOTING / TEMP SVC POLE VRU #: 002889806 T/S: October 26, 2016 08:14 AM BSUTTON per shaun
B101 02	12/02/16 <u>12/2/16</u>	TI <u>APD</u>	R*BLDG FOOTING / TEMP SVC POLE TIME: 17:00 VRU #: 002905875 T/S: 12/01/2016 02:13 PM LBENNETT

COMMENTS AND NOTES

Enoch Engineers, P.A.

Materials & Tests Division
1403 NC Highway 50 South
Benson, NC 27504
919-894-7765

Daily Report

Client: CUMBERLAND HOMES
Project: BRIAN-LIETH MEADOWS SID
Location: 50 FARRAH-SHEA WAY
Lot #: 18


Technician: BH/RP
Date: 11.22.14
Contractor: 90 SEAN SMITH

Services Performed:

- Soil Tests
- Concrete Tests
- Asphalt Tests
- Site Inspection
- Foundation Inspection
- Structural Inspection
- Proof-roll

- Steel Inspection
- Meeting
- Other **FOOTING INSP**
- Subgrade Inspection

Remarks: PERFORMED FOOTING INSPECTION AT SITE NOTED
ABOVE. SOILS CONFIRMED A MINIMUM ALLOWABLE BEARING
CAPACITY AT ALL FOOTING LOCATIONS EXCEPT FOOTING LOCATIONS
NOTED BELOW. RECOMMEND UNDERCUTTING (2) - 12"
SECTIONS AND A (1) - 24" SECTION, BACKFILLING WITH WASHED
57 STONE OR ADDITIONAL CONCRETE.

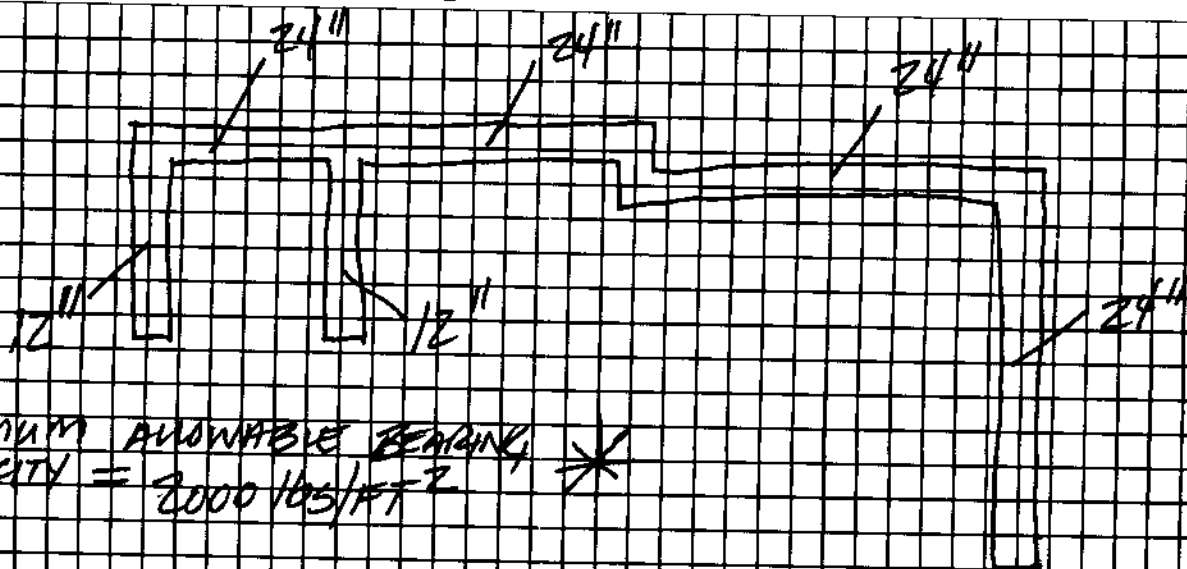

* MINIMUM ALLOWABLE BEARING CAPACITY = 2000 LBS/FT² *

Technician: BH/RP