

ADDRESS : 985 PURFOY RD
 CONTRACTOR : TOMMY ALLEN CONSTRUCTION INC
 OWNER : COLLINS TONY A & MEGHAN N
 PARCEL : 08-0664- - -0008- -11-
 APPL NUMBER: 17-50040522 CP NEW RESIDENTIAL (SFD)

SUBDIV:
 PHONE : (919) 779-2888
 PHONE :

DIRECTIONS : T/S: 01/06/2017 04:00 PM JBROCK ----
 401 N T R ON CHALYBEATS SPRINGS RD TURN
 L ON PURFOY RD JOB SITE ON L JUST
 BEFORE RAWLS CHURCH RD

STRUCTURE: 000 000 66.2X55.2 3BDR CRAWL W/ GARAGE

FLOOD ZONE : FLOOD ZONE X
 # BEDROOMS : 3000000.00
 SEPTIC - EXISTING? : NEW TANK

PROPOSED USE : SFD
 WATER SUPPLY : COUNTY

PERMIT: CPSF 00 CP * SFD

TYP/SQ	REQUESTED COMPLETED	INSP RESULT	DESCRIPTION RESULTS/COMMENTS
B101 01	2/20/17	BS	R*BLDG FOOTING / TEMP SVC POLE VRU #: 002934551
	2/20/17	AP	T/S: February 20, 2017 09:39 AM BSUTTON ----- TPOLE was done earlier and has power
B103 01	3/06/17	BS	R*BLDG FOUND & TEMP SVC POLE VRU #: 002940651
	3/06/17	AP	T/S: March 06, 2017 02:50 PM BSUTTON -----
A814 01	3/07/17	SB	ADDRESS CONFIRMATION TIME: 17:00 VRU #: 002940971
	3/06/17	AP	985 PURFOY RD FUQUAY VARINA 27526 T/S: 03/06/2017 04:47 PM SBENNETT -----
B105 01	3/20/17	BS	R*OPEN FLOOR VRU #: 002946575
	3/20/17	AP	T/S: March 20, 2017 09:11 AM BSUTTON -----
R125 01	4/12/17	BS	ONE TRADE ROUGH IN TIME: 17:00 VRU #: 002957355
	4/12/17	CA	T/S: 04/10/2017 03:34 PM BPETRICH ----- THIS IS A SHEATHING INSPECTION ONLY - PAID FEE T/S: April 12, 2017 01:09 PM BSUTTON -----
R125 02	4/21/17	BS	ONE TRADE ROUGH IN TIME: 17:00 VRU #: 002961910
	4/21/17	AP	T/S: 04/19/2017 04:04 PM LBENNETT ----- SHEATHING INSPECTION ALREADY PAID FOR T/S: April 21, 2017 12:15 PM BSUTTON -----
R425 01	5/05/17	DT	FOUR TRADE ROUGH IN VRU #: 002968417
	5/05/17	DA	T/S: 05/05/2017 03:41 PM DETAYLOR ----- No plans Fire caulk all holes in top and bottom plate Completely install vacuum system Rodent proof tubs and showers
R425 02	5/10/17	BS	FOUR TRADE ROUGH IN VRU #: 002970244
	5/10/17	DA	T/S: May 10, 2017 12:02 PM BSUTTON ----- Missing two stud columns for roof support above. 2. Window at rec room does not meet egress requirements. Ok to insulate.
I129 01	5/23/17	TI	R*INSULATION INSPECTION VRU #: 002975597
R425 03	5/23/17	TI	FOUR TRADE ROUGH IN TIME: 17:00 VRU #: 002975951
			T/S: 05/22/2017 03:01 PM BPETRICH -----

COMMENTS AND NOTES



May 16, 2017

ATTN: Inspector

MPI Foam installed Premium Spray Products FOAMSULATE 50-NIB Open Cell Spray Foam Insulation on the 1st floor exterior walls, garage ceiling, and roof deck of the home at 985 Purfoy Road Fuquay-Varina.

Premium Spray Products FOAMSULATE 50-NIB OC Spray-Applied Polyurethane Insulation, ICC-ES Report ESR-3081, was installed in accordance to the manufactures installer's specifications and to the NC IRC code. The R-Value of the Open Cell is minimal R-22 at 6" and R-26 at 7".

MPI Foam is a certified installer for Premium, NCFI, Henry, Bayer, and Quadrant Foam. Please feel free to call with questions. 919.360.0888

A handwritten signature in black ink, consisting of stylized, overlapping loops and lines, likely representing the initials of a representative from MPI Foam.

MPI Foam
1220 Nowell Road
Raleigh, NC 27607



Generated by REScheck-Web Software
Compliance Certificate

Energy Code: **North Carolina Energy Conservation Code**
 Location: **Fuquay-Varina, North Carolina**
 Construction Type: **Single Family**
 Project Type: **New construction**
 Glazing Area Percentage: **15%**
 Heating Degree Days: **3182**
 Climate Zone: **4**

Construction Site:
 985 Purfoy Road
 Fuquay-Varina, North Carolina

Owner/Agent:

Designer/Contractor:

Compliance: Passes using UA trade-off

Compliance: **0.0% Better Than Code** Maximum UA: **426** Your UA: **426** Maximum SHGC: **0.30** Your SHGC: **0.30**

The % Better or Worse Than Code index reflects how close to compliance the house is based on code trade-off rules.
 It DOES NOT provide an estimate of energy use or cost relative to a minimum-code home.

Assembly	Gross Area or Perimeter	Cavity R-Value	Cont. R-Value	Glazing or Door U-Factor	UA
Wall: Wood Frame, 16in. o.c.	1970	13.0	0.0		130
Window: Wood Frame, 2 Pane w/ Low-E SHGC: 0.30	295			0.280	83
Door: Solid	84			0.300	25
Floor - Garage Ceiling: All-Wood Joist/Truss Over Uncond. Space	620	19.0	0.0		29
Ceiling: Cathedral	3100	26.0	0.0		121
Crawl: Solid Concrete or Masonry Wall height: 4.0' Depth below grade: 3.0' Insulation depth: 4.0' Inside below-grade depth: 0.5'	1000	0.0	17.0		38


Compliance Statement: The proposed building design described here is consistent with the building plans, specifications, and other calculations submitted with the permit application. The proposed building has been designed to meet the North Carolina Energy Conservation Code requirements in REScheck-Web and to comply with the mandatory requirements listed in the REScheck Inspection Checklist.

Jan Holmes - Estimator
 Name - Title

Jan Holmes
 Signature

5/15/17
 Date

ISSUED TO:
MPI FOAM

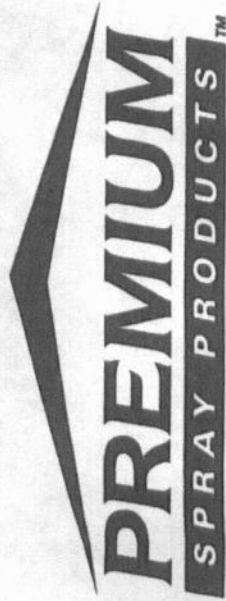

Factory Authorized Installer

FOAMSULATE™

MPI FOAM has demonstrated the technical expertise to properly install the Foamsulate™ line of insulation products. The company and its' principals agree to follow the current installation guidelines and specifications of Premium Spray Products, Inc. In addition to the installation guidelines, the company and its' principals agree to implement the "Contractor Safety and Product Stewardship" program of Premium Spray Products, Inc. It is the responsibility of the company and its' principals to follow all current industry "best practices" and to properly convey those practices along with the Premium Spray Products, Inc. guidelines, specifications and safety programs to its employees and affiliates.

Issued On This Date By:
Technical Services Department
Premium Spray Products, Inc.

April 21, 2015

Premium Spray Products, Inc. • 1255 Kennestone Circle Ste. 200 • Marietta, GA 30066
(770) 528-9556 • www.premiumspray.com

ICC-ES Evaluation Report
ESR-3081

Reissued July 2016

This report is subject to renewal July 2017.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

**DIVISION: 07 00 00—THERMAL AND MOISTURE
PROTECTION**
Section: 07 21 00—Thermal Insulation
REPORT HOLDER:
PREMIUM SPRAY PRODUCTS, INC.
 1255 KENNESTONE CIRCLE #200
 MARIETTA, GEORGIA 30066
 (770) 528-9556
www.premiumspray.com
EVALUATION SUBJECT:
**FOAMSULATE™ 50 AND FOAMSULATE™ 210 SPRAY-
APPLIED POLYURETHANE FOAM INSULATIONS**
1.0 EVALUATION SCOPE
Compliance with the following codes:

- 2012 and 2009 *International Building Code*® (IBC)
- 2012 and 2009 *International Residential Code*® (IRC)
- 2012 and 2009 *International Energy Conservation Code*® (IECC)
- 2013 *Abu Dhabi International Building Code* (ADIBC)†

†The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

- Other Codes (see Section 8.0)

Properties evaluated:

- Surface-burning characteristics
- Physical properties
- Thermal resistance (*R*-values)
- Attic and crawl space installation
- Air permeability

2.0 USES

Foamsulate™ 50 and Foamsulate™ 210 insulations are used as nonstructural thermal insulating materials in buildings of Type V construction (IBC) and dwellings under the IRC. Under the IRC, the insulation may be used as air-impermeable insulation when installed in accordance with Section 3.4. The insulation is for use in wall cavities and floor/ceiling assemblies, and in attic and crawl space installations as described in Section 4.4.

3.0 DESCRIPTION
3.1 General:

3.1.1 Foamsulate™ 50: Foamsulate™ 50 is a low-density, open-cell, water-blown polyurethane foam plastic insulation system with an installed nominal density of 0.6 pcf (9.6 kg/m³). Foamsulate™ 50 is a two-component, spray-applied product. The two components of the insulation are polymeric isocyanate (A-component) and a resin (B-component) which, when stored in unopened containers at a temperature between 65°F and 85°F (18°C and 29°C), have a shelf life of six months.

3.1.2 Foamsulate™ 210: Foamsulate™ 210 is a medium-density, closed-cell, polyurethane foam plastic insulation system with an installed nominal density of 2.4 pcf (38.4 kg/m³). Foamsulate™ 210 is a two-component, spray-applied product. The two components of the insulation are polymeric isocyanate (A-component) and a resin (B-component) which, when stored in unopened containers at a temperature between 65°F and 85°F (18°C and 29°C), have a shelf life of six months.

3.2 Surface Burning Characteristics:

When tested in accordance with ASTM E84 at a maximum thickness of 4 inches (102 mm), and a nominal density of 0.6 pcf (9.6 kg/m³) for Foamsulate™ 50 and a nominal density of 2.4 pcf (38.4 kg/m³) for Foamsulate™ 210, the insulations have a flame-spread index of 25 or less and a smoke-developed index of 450 or less.

3.3 Thermal Resistance:

The insulations have a thermal resistance (*R*-value) at a mean temperature of 75°F (24°C) as shown in Tables 1 and 2.

3.4 Air Permeability:

Foamsulate™ 50 insulation at a minimum thickness of 3/4 inch (19.1 mm), and Foamsulate™ 210 insulation at a minimum thickness of 1 1/2 inches (38 mm), are considered air-impermeable insulations in accordance with 2012 IRC Section R806.5 (2009 IRC Section R806.4), based on testing in accordance with ASTM E283.

3.5 Intumescent Coatings:
3.5.1 Premicote IB Fire-Retardant Acrylic Coating:

Premicote IB Fire-Retardant Acrylic Coating, manufactured for Premium Spray Products, Inc., is a water-based acrylic coating with a specific gravity of 1.29. The coating is supplied in 5-gallon (19 L) pails and 55-gallon (208 L) drums. The coating material has a shelf life of six months when stored in factory-sealed containers at temperatures between 45°F (7.2°C) and 75°F (23.9°C).

4.0 INSTALLATION

4.1 General:

Foamsulate™ 50 and Foamsulate™ 210 insulations must be installed in accordance with the manufacturer's published installation instructions and this report. The manufacturer's installation instructions and this report must be strictly adhered to, and copies of the instructions and this evaluation report must be available on the jobsite at all times during installation.

4.2 Application:

The Foamsulate™ insulations must be applied using spray equipment specified by Premium Spray Products, Inc. The product must not be used in areas which have a maximum service temperature greater than that specified in the manufacturer's published installation instructions, nor in electrical outlet or junction boxes or in contact with rain or water.

Foamsulate™ 50 may be installed in multiple passes at 3.5 to 6 inches per pass (89 to 152 mm) to the maximum thickness. Foamsulate™ 210 may be installed in multiple passes at 1/2 inch to 2 inches (12.7 to 51 mm) per pass to the maximum thickness. The Foamsulate™ 50 insulation passes must be allowed to fully expand and to cure for a minimum of 10 minutes prior to application of an additional pass. The Foamsulate™ 210 insulation passes must be allowed to fully expand and to cure for a minimum of 15 minutes prior to application of an additional pass.

4.3 Thermal Barrier:

4.3.1 Application with a Prescriptive Thermal Barrier: Except as noted in Section 4.4, the Foamsulate™ 50 and Foamsulate™ 210 insulations are limited to a maximum thickness of 7 1/2 inches (190.5 mm) in walls and 11 1/2 inches (292 mm) in ceilings. The insulations must be separated from the interior of the building by an approved thermal barrier, such as 1/2-inch (12.7 mm) gypsum wallboard installed using mechanical fasteners in accordance with the applicable code, or an equivalent 15-minute thermal barrier complying with the applicable code.

4.4 Attics and Crawl Spaces:

4.4.1 Application with a Prescriptive Ignition Barrier: When the Foamsulate™ insulations are installed within attics or crawl spaces, where entry is made only for service of utilities, an ignition barrier must be installed in accordance with IBC Section 2603.4.1.6 or IRC Section R316.5.3 or R316.5.4, as applicable. The ignition barrier must be consistent with the requirements for the type of construction required by the applicable code and must be installed in a manner so that the foam plastic insulation is not exposed. Foamsulate™ insulation, as described in this section, may be installed in unvented attics in accordance with 2012 IRC Section R806.5 (2009 IRC Section R806.4).

4.4.2 Application without a Prescriptive Ignition Barrier: The Foamsulate™ insulations may be installed in an attic or crawl space without a prescriptive ignition barrier when all of the following conditions apply:

1. Entry to the attic or crawl space is only for the service of utilities and no storage is permitted.
2. There are no interconnected attic or crawl space areas.
3. Air in the attic or crawl space is not circulated to other parts of the building.
4. Combustion air is provided in accordance with IMC (*International Mechanical Code*) Section 701.
5. Attic ventilation is provided when required by IBC Section 1203.2 or IRC Section R806, except air-impermeable insulation is permitted in unvented

attics in accordance with 2012 IRC Section R806.5 (2009 IRC Section R806.4).

6. Under-floor (crawl-space) ventilation is provided when required by IBC Section 1203.3 or IRC Section R408.1, as applicable.

4.4.2.1 Application with Intumescent Coating: The insulations may be spray-applied to the underside of roof sheathing and/or rafters in attics, and the underside of wood floors and/or floor joists in crawl spaces, as described in this paragraph. The thickness of the spray foam plastic applied to the underside of the roof sheathing or the underside of floors in crawl spaces must not exceed 11 1/2 inches (292 mm). The thickness of the spray foam plastic insulation applied to vertical wall surfaces must not exceed 8 inches (203 mm). Foamsulate™ 50 foam plastic must be covered with Premicote IB Fire-Retardant Acrylic Coating applied to a thickness of 9.12 mils (0.23 mm) [approximately 1 gallon per 100 square feet (0.40 L/m²)]. Foamsulate™ 210 foam plastic must be covered with Premicote IB Fire-Retardant Acrylic Coating applied to a minimum thickness of 9.32 mils (0.24 mm) [approximately 1.02 gallons per 100 square feet (0.41 L/m²)]. The intumescent coating must be applied over the insulation in accordance with the coating manufacturer's instructions. Surfaces to be coated must be dry, clean, and free of dirt, loose debris and other substances that could interfere with adhesion of the coating. The coating is applied with a medium size nap roller, soft brush or conventional airless spray equipment.

The coating must be applied when ambient and substrate temperatures are at least 50°F (10°C). The insulation may be installed in unvented attics as described in this section and at the minimum thickness noted in Section 3.4, in accordance with 2012 IRC Section R806.5 (2009 IRC Section R806.4).

4.4.2.2 Application without Intumescent Coating: Foamsulate™ 210 may be spray-applied to the underside of roof sheathing and/or rafters in attics, and the underside of wood floors and/or floor joists in crawl spaces, as described in this paragraph. The thickness of the foam plastic applied to the underside of the roof sheathing or the underside of floors in crawl spaces must not exceed 11 1/4 inches (286 mm). The thickness of the spray foam plastic insulation applied to vertical wall surfaces must not exceed 7 1/4 inches (184 mm).

The insulation may be installed in unvented attics as described in this section and at the minimum thickness noted in Section 3.4, in accordance with 2012 IRC Section R806.5 (2009 IRC Section R806.4).

4.4.3 Use on Attic Floors: Foamsulate™ 50 and Foamsulate™ 210 insulations may be installed at a maximum thickness of 8 inches (203 mm) between joists in attic floors when covered with Premicote IB Fire-retardant Acrylic Coating applied as described in Section 4.4.2.1. Foamsulate™ 210 may be installed at a maximum thickness of 7 1/4 inches (184 mm) without an intumescent coating or ignition barrier. Foamsulate™ 210 may be applied to a maximum thickness of 11 1/4 inches (286 mm) on the attic floor between and/or over the joists when a prescriptive ignition barrier is installed in accordance with IBC Section 2603.4.1.6 or IRC Section R316.5.3. The insulations must be separated from the interior of the building by an approved thermal barrier.

5.0 CONDITIONS OF USE

The Foamsulate™ 50 and Foamsulate™ 210 spray-applied polyurethane insulations described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The insulation must be installed in accordance with the manufacturer's published installation instructions, this evaluation report and the applicable code. If there is a conflict between the installation instructions and this report, this report governs.
- 5.2 The insulation must be separated from the interior of the building by an approved 15-minute thermal barrier, except when installation is in attics and crawl spaces as described in Section 4.4.
- 5.3 The insulation must not exceed the thickness and density noted in Sections 3.2, 4.3 and 4.4.
- 5.4 The insulation must be protected from the weather during and after application.
- 5.5 The insulation must be applied by professional spray polyurethane foam installers approved by Premium Spray Products, Inc., or by the Spray Polyurethane Foam Alliance (SPFA) for the installation of spray polyurethane foam insulation.
- 5.6 Use of the insulation in areas where the probability of termite infestation is "very heavy" must be in accordance with 2012 IBC Section 2603.9 (2009 IBC Section 2603.8) or IRC Section R318.4, as applicable.
- 5.7 Jobsite certification and labeling of the insulation must comply with 2012 IRC Section N1112 (2009 IRC Section N1101.4) and 2012 IECC Sections C303.1 and R303.1 (2009 IECC Section 303.1), as applicable.
- 5.8 A vapor retarder must be installed in accordance with the applicable code.
- 5.9 The insulations are manufactured in Marietta, Georgia, under a quality control program with inspections by ICC-ES.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Spray-applied Foam Plastic Insulation (AC377), dated November 2012 (editorially corrected April 2013), including reports of tests in accordance with Appendix X.
- 6.2 Reports of air permeance testing in accordance with ASTM E283.

7.0 IDENTIFICATION

All packages and containers of Foamsulate™ 50 and Foamsulate™ 210 must be labeled with the Premium Spray Products, Inc., name and address; the product name; the flame spread index and the smoke-developed index; the date of manufacture; and the evaluation report number (ESR-3081).

Intumescent coatings must be identified with the manufacturer's name and address, the product trade name and use instructions.

8.0 OTHER CODES

In addition to the codes referenced in Section 1.0, the products described in this report were evaluated for compliance with the requirements of the following codes:

- 2006 *International Building Code*® (2006 IBC)
- 2006 *International Residential Code*® (2006 IRC)
- 2006 *International Energy Conservation Code*® (2006 IECC)
- 2003 *International Building Code*® (2003 IBC)
- 2003 *International Residential Code*® (2003 IRC)
- 2003 *International Energy Conservation Code*® (2003 IECC)

The products comply with the above-mentioned codes as described in Sections 2.0 through 7.0 of this report, with the revisions noted below:

- **Application with a Prescriptive Thermal Barrier:** See Section 4.3.1, except the approved thermal barrier must be installed in accordance with Section R314.4 of the 2006 IRC or Section R314.1.2 of the 2003 IRC, as applicable.
- **Application with a Prescriptive Ignition Barrier:** See Section 4.4.1, except an ignition barrier must be installed in accordance with Section R314.2.3 of the 2003 IRC, or Section R314.5.3 or R314.5.4 of the 2006 IRC.
- **Application without a Prescriptive ignition Barrier:** See Section 4.4.2, except that combustion air is provided in accordance with Sections 701 and 703 of the 2006 IMC.
- **Protection against Termites:** See Section 5.6, except use of the insulation in areas where the probability of termite infestation if "very heavy" must be in accordance with Section 320.4 of the 2003 IRC or Section R320.5 of the 2006 IRC.
- **Jobsite Certification and Labeling:** See Section 5.7, except jobsite certification and labeling must comply with Section 102.5.1 of the 2003 IECC, or Sections 102.1.1 and 102.1.11, as applicable, of the 2006 IECC.

TABLE 1—FOAMSULATE™ 50 THERMAL RESISTANCE (R-VALUES)^{1,2}

THICKNESS (Inches)	R-VALUE (°F·ft ² ·h/Btu)
1	3.7
2	7.4
3	11
3.5	13
4	14
5	19
5.5	20
6	22
7	26
7.5	28
8	30
9	33
9.5	35
10	37
11.5	43

For SI: 1 inch = 25.4 mm, 1°F·ft²·h/Btu = 0.176 110°K·m²/W.

¹R-values are calculated based on tested K values at 1-, 3.5- and 4-inch thicknesses.

²R-values greater than 10 are rounded to the nearest whole number.

TABLE 2—FOAMSULATE™ 210 THERMAL RESISTANCE (R-VALUES)^{1,2}

THICKNESS (Inches)	R-VALUE (°F·ft ² ·h/Btu)
1	5.8
2	12
3	19
3.5	23
4	27
5	34
5.5	37
6	40
7	47
7.5	50
8	54
9	60
9.5	64
10	67
11.5	77

For SI: 1 inch = 25.4 mm, 1°F·ft²·h/Btu = 0.176 110°K·m²/W.

¹R-values are calculated based on tested K values at 1-, 3.5- and 4-inch thicknesses.

²R-values greater than 10 are rounded to the nearest whole number.

ICC-ES Evaluation Report**ESR-3081 FBC Supplement**

Reissued July 2016

This report is subject to renewal July 2017.www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 07 00 00—THERMAL AND MOISTURE PROTECTION
Section: 07 21 00—Thermal Insulation**REPORT HOLDER:****PREMIUM SPRAY PRODUCTS, INC.**
1255 KENNESTONE CIRCLE #200
MARIETTA, GEORGIA 30066
(770) 528-9556
www.premiumspray.com**EVALUATION SUBJECT:****FOAMSULATE™ 50 AND FOAMSULATE™ 210 SPRAY-APPLIED POLYURETHANE FOAM INSULATIONS****1.0 EVALUATION SCOPE****Purpose:**

The purpose of this evaluation report supplement is to indicate that Foamsulate™ 50 and Foamsulate™ 210 spray-applied polyurethane foam insulations, recognized in ICC-ES master evaluation report ESR-3081, have also been evaluated for compliance with the codes noted below.

Applicable Code Editions:2010 *Florida Building Code—Building*2010 *Florida Building Code—Residential***2.0 CONCLUSIONS**

The Foamsulate™ 50 and Foamsulate™ 210 spray-applied polyurethane foam insulations, described in Sections 2.0 through 7.0 of the master evaluation report ESR-3081, comply with the 2010 *Florida Building Code—Building* and the 2010 *Florida Building Code—Residential*, when installed in accordance with the master evaluation report under the following condition: Foamsulate™ 50 and Foamsulate™ 210 spray-applied polyurethane foam insulations used in exterior walls of multistory buildings located in High-Velocity Hurricane Zones must comply with Section 2612.3.2.4 of the *Florida Building Code—Building*.

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the master report, reissued July 2016.