


**Note: Refer to current Boise Cascade Installation Guide for details not shown.**

## I-Joist Plot ID # & Length on Top of Flange

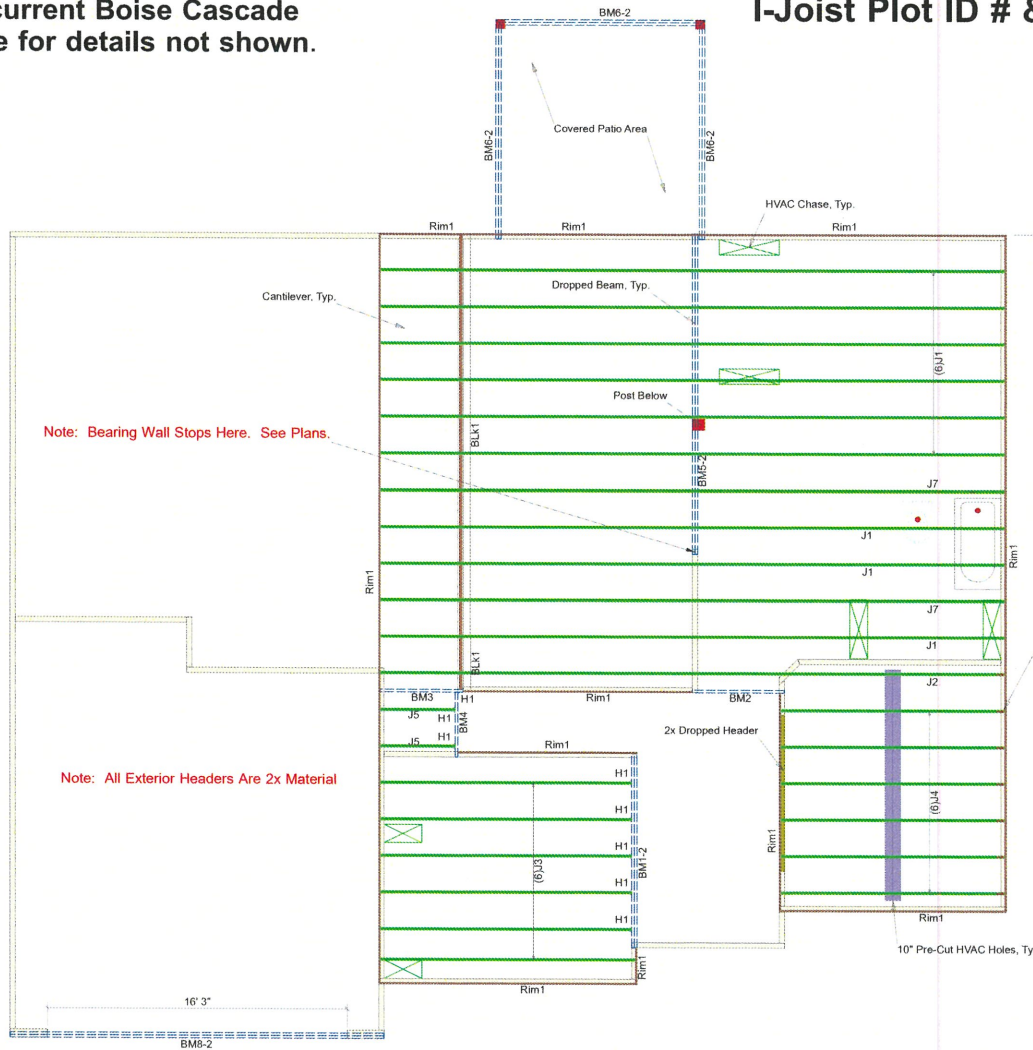

Note: Bearing Wall Stops Here. See Plans.

Note: All Exterior Headers Are 2x Material

### General Notes:

- 1.) "READY" Boise Installation Guide before installation of products.
- 2.) All I-Joist, LVL beams, and Rim Board must be field cut to length.
- 3.) Contractor must verify and approve the material list.
- 4.) I-Joist may be moved 3" out of its own o.c. spacing, up to 19.2" o.c., to allow for plumbing drops.
- 5.) This layout, is a placement plan and, was designed in accordance with the original design of the structure (unless otherwise noted). See original plans for additional structural notes.
- 6.) Ceramic tile floors should be supported per APA standards. Additional joists may be required.
- 7.) HVAC & PLUMBER, "Review" Boise Installation Guide (Joist Hole Location & Sizing) Chart "BEFORE" cutting the I-joist product.
- 8.) "Blocking", are Random Length I-joist, Labeled as such.

Start Framing Joist Here  
Scribed @ 24" o.c. @ 19.2" o.c.

ARROWS Are (NO-CUT) End.  
This Is Crucial To Hole Alignment, Typ.



**84 LUMBER**  
Build on what we know.™

200 Emmett Drive, Dunn, N.C. 28334 (910) 892 + 8400




Boise Cascade

Connector Summary				
PlotID	Qty	Manuf	Product	Flange
H1	8	Simpson	IUS 1.81/14	None

Products				
PlotID	Length	Product	Piles	Net Qty
J1	34' 0"	14" BCI@ 4500s-1.8	1	9
J2	34' 0"	14" BCI@ 4500s-1.8	1	1
J3	14' 0"	14" BCI@ 4500s-1.8	1	6
J4	12' 4"	14" BCI@ 4500s-1.8	1	6
J5	4' 4"	14" BCI@ 4500s-1.8	1	2
J7	34' 0"	14" BCI@ 5000s-1.8	1	2
BM1-2	10' 8"	14" BCI@ 4500s-1.8	2	2
BM2	5' 0"	14" BCI@ 4500s-1.8	1	1
BM3	4' 8"	14" BCI@ 4500s-1.8	1	1
BM4	3' 8"	14" BCI@ 4500s-1.8	1	1
BM5-2	18' 0"	1-3/4" x 9-1/4" VERSA-LAM@ 2.0 3100 SP	2	2
BM6-2	12' 0"	1-3/4" x 9-1/4" VERSA-LAM@ 2.0 3100 SP	2	6
BM8-2	22' 0"	1-3/4" x 16" VERSA-LAM@ 2.0 3100 SP	2	2
Rim1	12' 0"	1" x 14" BC RIM BOARD OSB	1	15
BLK1	24' 0"	14" BCI@ 4500s-1.8	1	1

### 2ND FLOOR LAYOUT

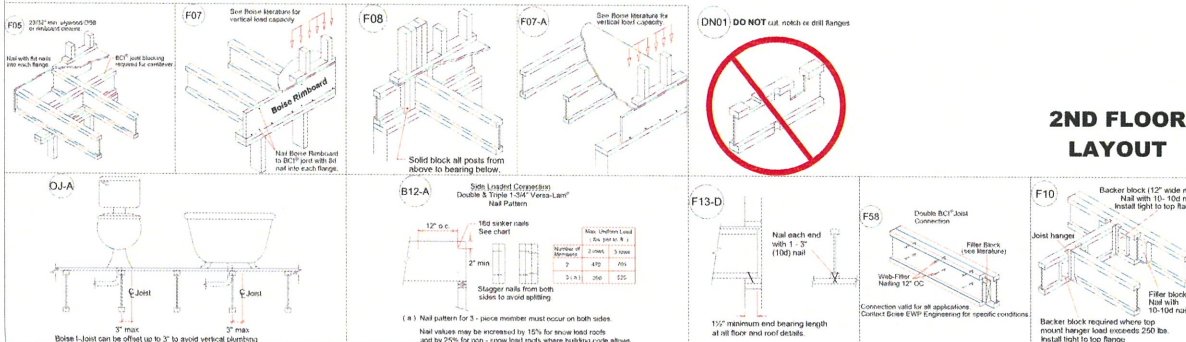

Caviness Land Development

CL - 2977 CP  
GOL

Scale: NTS

Date: 04.07.2017

By: J. Cifemi

DWG: 11939

Sheet: 1 of 1

**GENERAL NOTES:**


DO NOT CUT OR MODIFY TRUSSES.  
TRUSSES ARE SPACED 24" ON CENTER UNLESS NOTED OTHERWISE.

REFER TO THE INDIVIDUAL TRUSS DESIGN DRAWINGS FOR THE LOCATION OF LATERAL BRACING AND MULTI-PLY CONNECTION REQUIREMENTS.

PER ANSI TPI 1-2002 THE TRUSS ENGINEER IS RESPONSIBLE FOR TRUSS TO TRUSS CONNECTIONS AND TRUSS PLY TO PLY CONNECTIONS. THIS TRUSS PLACEMENT PLAN RECOMMENDS TRUSS TO BEARING CONNECTIONS AND TRUSS TO BEAM CONNECTIONS WHICH SHALL BE REVIEWED BY THE BUILDING DESIGNER. IT IS THE RESPONSIBILITY OF THE BUILDING DESIGNER TO RESOLVE ALL ROOF FORCES ADEQUATELY TO THE FOUNDATION.

**THIS LAYOUT IS INTENDED FOR THE PURPOSE OF TRUSS LOCATION AND PLACEMENT ONLY. REFER TO THE BUILDING PLANS FOR ACTUAL BUILDING CONSTRUCTION.**

QUOTE: 1600124

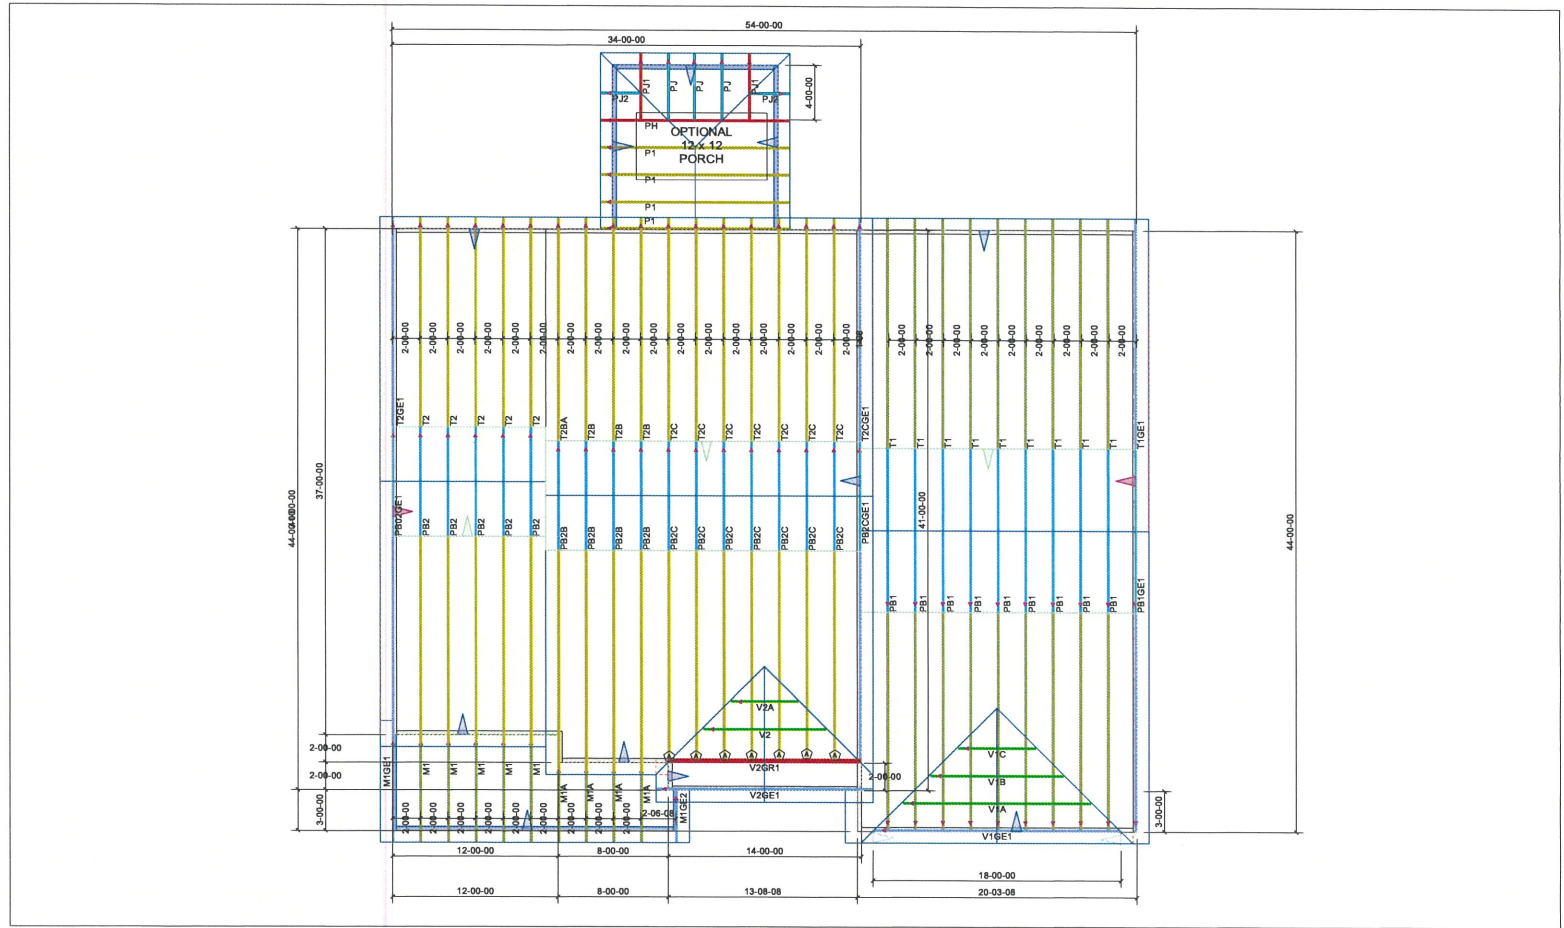

**Hardware List:**

A	7	HUS26
B	-	HUS28-2
C	-	#####
D	-	#####
-	-	H2.5A
-	-	TBE4
-	-	SUPER ANCHOR

**ROOF LOADING:**

TOP LIVE: 20 PSF

TOP DEAD: 10 PSF

BOTTOM DEAD: 10 PSF

WIND SPEED: 115 MPH



DEDICATED TO QUALITY AND EXCELLENCE  
200 EMMETT ROAD  
DUNN, NORTH CAROLINA 28334  
PHONE: 910-892-8400

PROJECT:

CUSTOMER:

**CL2977 A W/CP**  
**CL 2977 A W/CP GOR**

MODEL:

SCALE:

NOT TO SCALE

P.O. NUMBER:

XXXXX

QUOTE: 1600124

DRAWN BY:

---

PRINT DATE:

//

REV:

04/07/16

10:09:34

SHIP DATE:

04/30/16