


# General Notes:


- 1.) "READ" Boise Installation Guide before installation of products.
- 2.) All I-Joist, LVL beams, and Rim Board must be field cut to length.
- 3.) Contractor must verify and approve the material list.
- 4.) I-Joist may be moved 3" out of its own o.c. spacing, up to 19.2" o.c., to allow for plumbing drops.
- 5.) This layout, is a placement plan and, was designed in accordance with the original design of the structure (unless otherwise noted). See original plans for additional structural notes.
- 6.) Ceramic tile floors should be supported per APA standards. Additional joists may be required.
- 7.) HVAC & PLUMBER, "Review" Boise Installation Guide (Joist Hole Location & Sizing) Chart "BEFORE" cutting the I-joist product.
- 8.) "Blocking", are Random Length I-joist, Labeled as such.

# I-Joist Plot ID # & Length on Top of Flange

Products				
PlotID	Length	Product	Piles	Net Qty
J1	32' 0"	16" BCI@ 4500s-1.8	1	5
J2	18' 8"	16" BCI@ 4500s-1.8	1	2
J3	15' 8"	16" BCI@ 4500s-1.8	1	4
J4	15' 8"	16" BCI@ 4500s-1.8	1	5
J5	14' 8"	16" BCI@ 4500s-1.8	1	5
J6	13' 8"	16" BCI@ 4500s-1.8	1	1
J7	8' 8"	16" BCI@ 4500s-1.8	1	4
J8	13' 4"	16" BCI@ 5000s-1.8	1	3
J10	24' 0"	16" BCI@ 60s-2.0	1	13
J9	24' 0"	16" BCI@ 60s-2.0	1	4
DB1-2	14' 0"	1-3/4" x 9-1/4" VERSA-LAM@ 2.0 3100 SP	2	4
DB2-2	8' 0"	1-3/4" x 9-1/4" VERSA-LAM@ 2.0 3100 SP	2	2
DB3-2	6' 0"	1-3/4" x 9-1/4" VERSA-LAM@ 2.0 3100 SP	2	4
DB4-2	20' 0"	1-3/4" x 11-7/8" VERSA-LAM@ 2.0 3100 SP	2	2
FB6	10' 0"	1-3/4" x 16" VERSA-LAM@ 2.0 3100 SP	1	1
FB7-2	8' 0"	1-3/4" x 16" VERSA-LAM@ 2.0 3100 SP	2	2
FB8-2	22' 0"	1-3/4" x 24" VERSA-LAM@ 2.0 3100 SP	2	2
JB9	24' 0"	16" BCI@ 60s-2.0	1	1
JB5-2	19' 4"	16" BCI@ 60s-2.0	2	2
Rim1	12' 0"	1" x 16" BC RIM BOARD OSB	1	14
BLK1	36' 0"	16" BCI@ 4500s-1.8	1	1

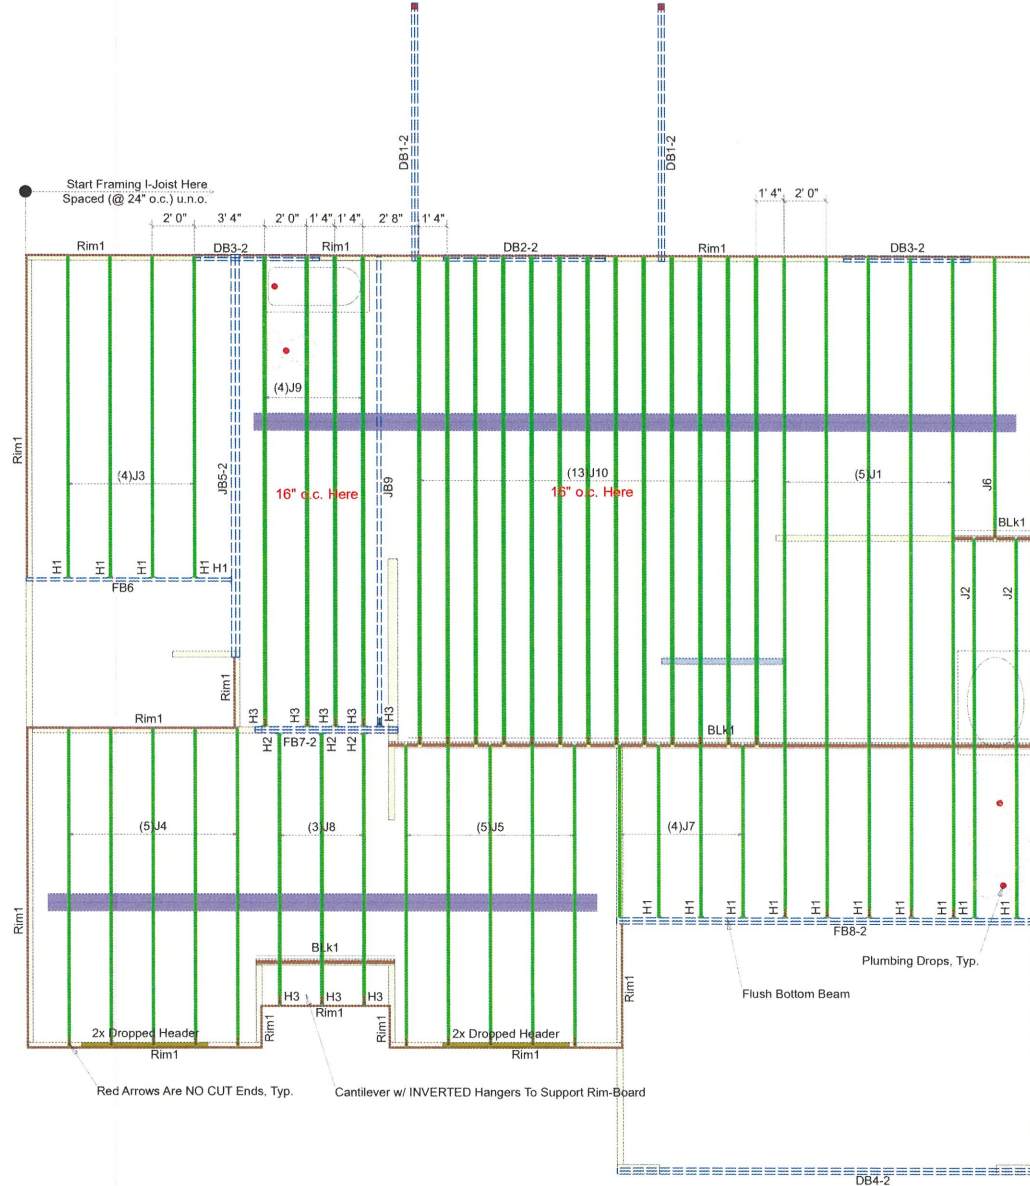

**Note: Refer to current Boise Cascade Installation Guide for details not shown.**

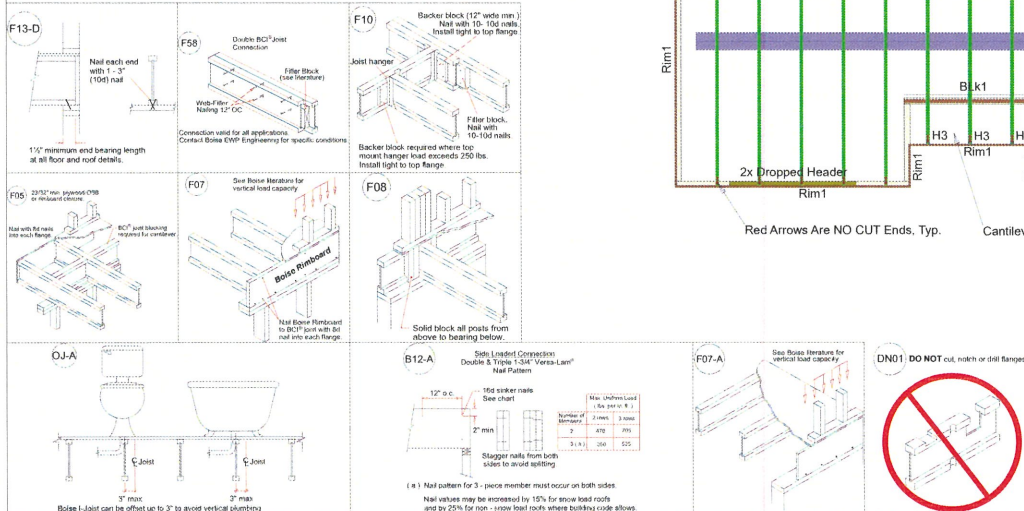

## 2ND FLOOR LAYOUT

Connector Summary				
PlotID	Qty	Manuf	Product	Flange
H1	15	Simpson	IUS 1.81/16	None
H2	6	Simpson	IUS 2.06/16	None
H3	5	Simpson	IUS 2.37/16	None

Caviness Land Development  
CL - 3145  
GOR-CP

Scale: NTS  
Date: NTS  
By: J. Baker  
DWG: 12116  
Sheet: 1 of 1

**84 LUMBER**  
Build on what we know.<sup>™</sup>

200 Emmett Drive, Dunn, N.C. 28334 (910) 892 + 8400

**GENERAL NOTES:**


DO NOT CUT OR MODIFY TRUSSES.  
TRUSSES ARE SPACED 24" ON CENTER UNLESS NOTED OTHERWISE.

REFER TO THE INDIVIDUAL TRUSS DESIGN DRAWINGS FOR THE LOCATION OF LATERAL BRACING AND MULTI-PLY CONNECTION REQUIREMENTS.

PER ANSI TPI 1-2002 THE TRUSS ENGINEER IS RESPONSIBLE FOR TRUSS TO TRUSS CONNECTIONS AND TRUSS PLY TO PLY CONNECTIONS. THIS TRUSS PLACEMENT PLAN RECOMMENDS TRUSSES TO BEARING CONNECTIONS AND TRUSS TO BEAM CONNECTIONS WHICH SHALL BE REVIEWED BY THE BUILDING DESIGNER. IT IS THE RESPONSIBILITY OF THE BUILDING DESIGNER TO RESOLVE ALL ROOF FORCES ADEQUATELY TO THE FOUNDATION.

**THIS LAYOUT IS INTENDED FOR THE PURPOSE OF TRUSS LOCATION AND PLACEMENT ONLY.  
REFER TO THE BUILDING PLANS FOR ACTUAL BUILDING CONSTRUCTION.**

ORDER: **Order #**

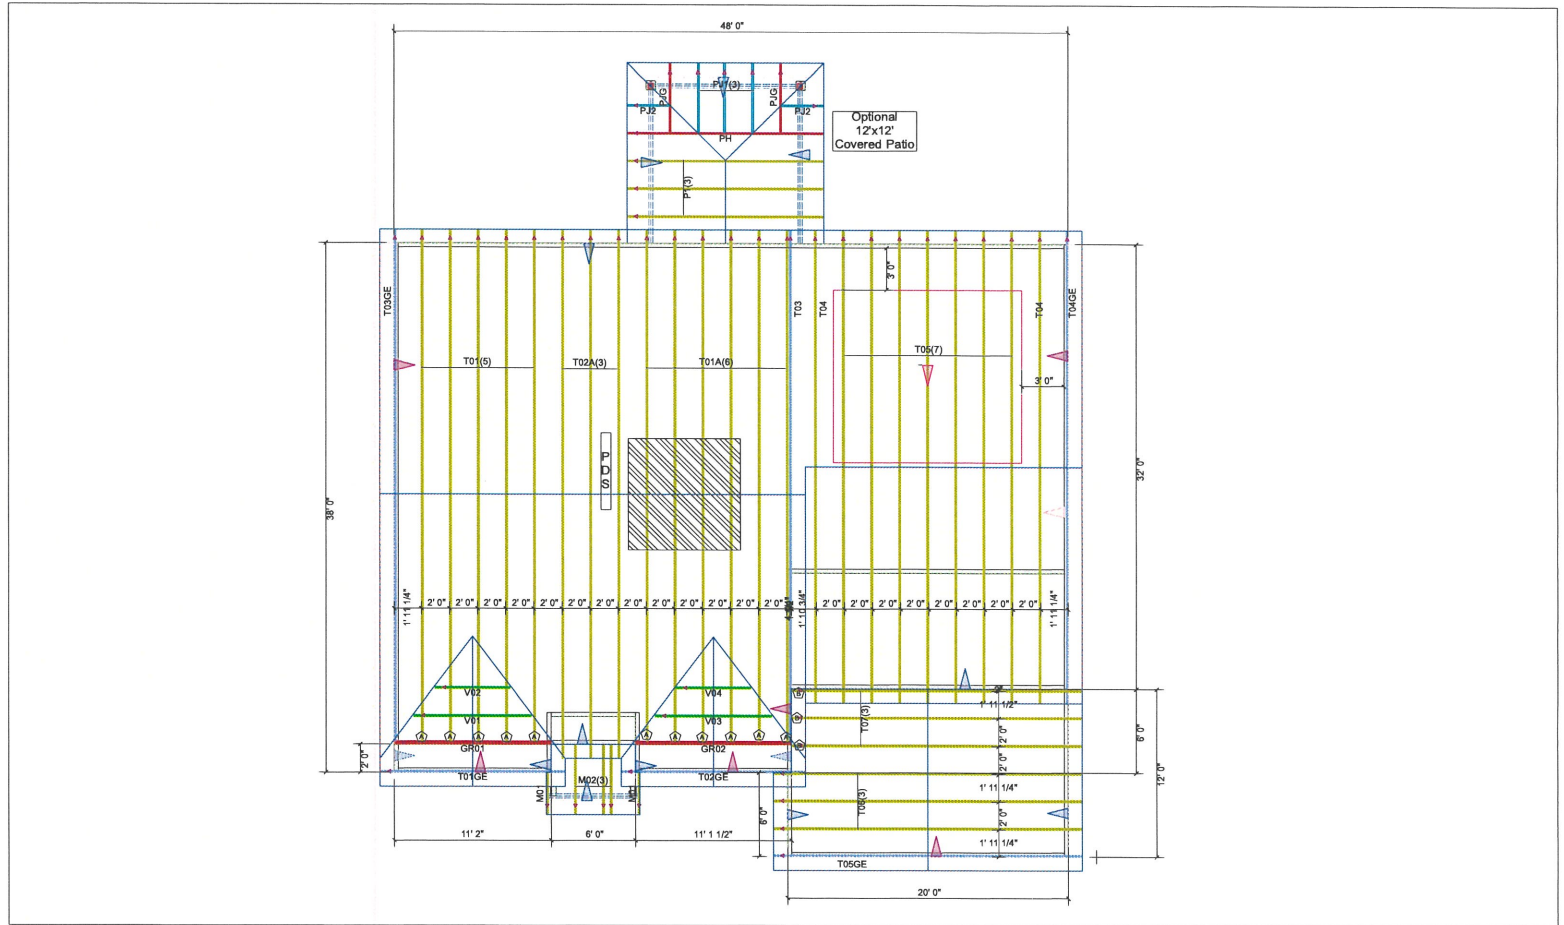

**Hardware List:**

A	11	HUS26
B	3	LUS26
C	-	-
D	-	-
-	-	-
-	-	-
-	-	-

**ROOF LOADING:**

TOP LIVE: 20 PSF  
TOP DEAD: 10 PSF  
BOTTOM DEAD: 10 PSF  
WIND SPEED: 115 MPH



DEDICATED TO QUALITY AND EXCELLENCE  
200 EMMETT ROAD  
DUNN, NORTH CAROLINA 28334  
PHONE: 910-892-8400

PROJECT:	<b>CL-3145 CP</b>		
CUSTOMER:	<b>Caviness Land</b>		
MODEL:	<b>CL 3145 CP GOR</b>		
SCALE:	NOT TO SCALE	P.O. NUMBER:	PO #
DRAWN BY:	RE	PRINT DATE:	Approved
ORDER:	<b>Order #</b>		SHIP DAY