




THIS HOME DESIGN IS PROTECTED BY FEDERAL COPYRIGHT LAWS. BY YOUR PURCHASE OF THIS PLAN FROM D&L DESIGN GROUP, INC YOU ARE GRANTED A LIMITED USAGE LICENSE TO CONSTRUCT ONE HOME OF THIS DESIGN. THIS LICENSE IS NOT TO BE REPRODUCED, COPIED, REPRODUCED, TRANSMITTED, OR OTHERWISE MADE PUBLIC IN ANY MANNER. PURCHASE OF THIS DESIGN DOES NOT CONSTITUTE AN ENDORSEMENT OR RECOMMENDATION OF ANY PRODUCT OR SERVICE. THE DESIGN IS PROVIDED AS IS WITHOUT WARRANTY OF ANY KIND. THE DESIGNER SHALL CONSTITUTE INTENTIONAL, NEGLIGENT AND VIOLATION OF THE COPYRIGHT. WITHOUT FURTHER NOTICE D&L DESIGN GROUP, INC WILL PROSECUTE TO THE FULLEST ALLOWED BY LAW.

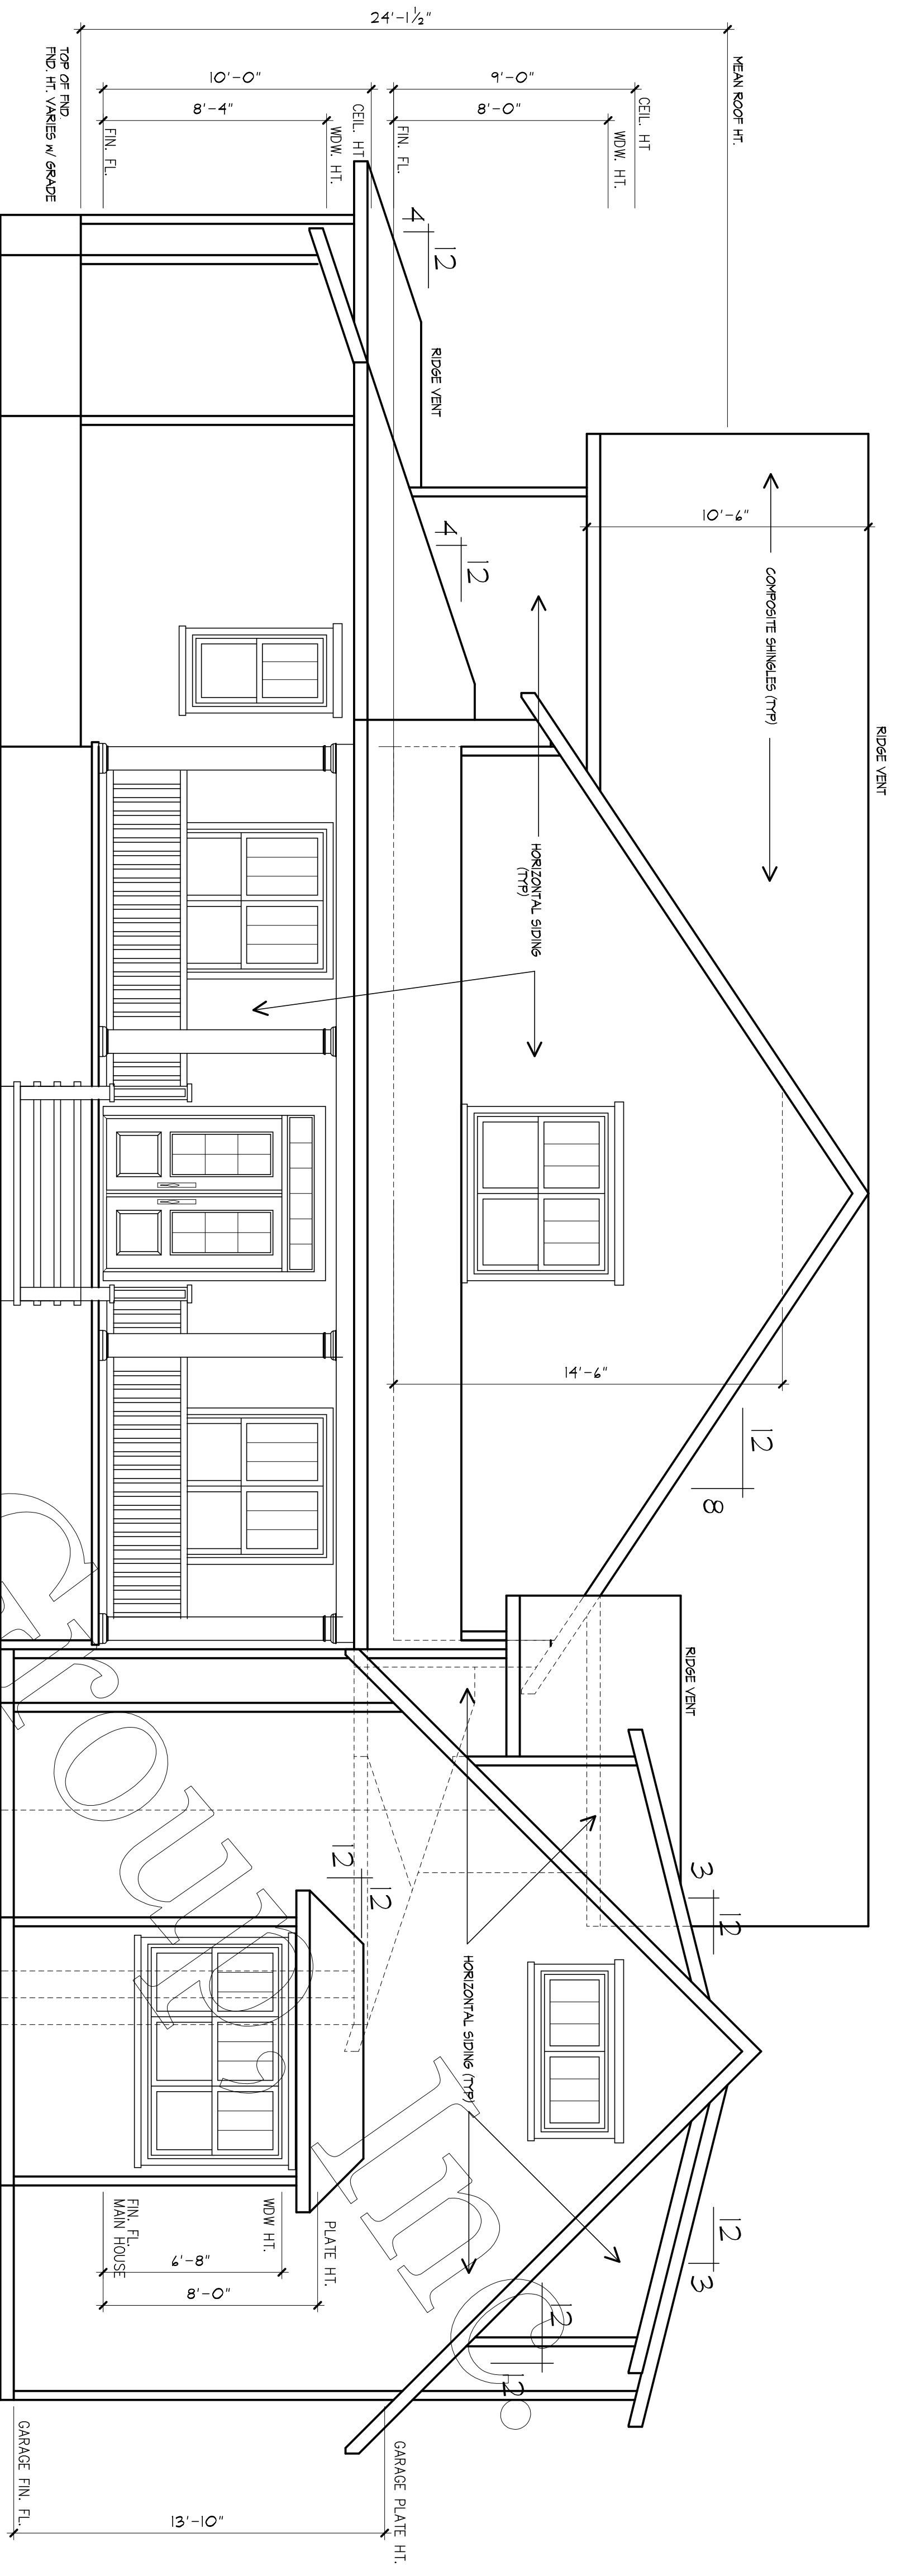


FRONT ELEVATION
SCALE: 1/4" = 1'-0"

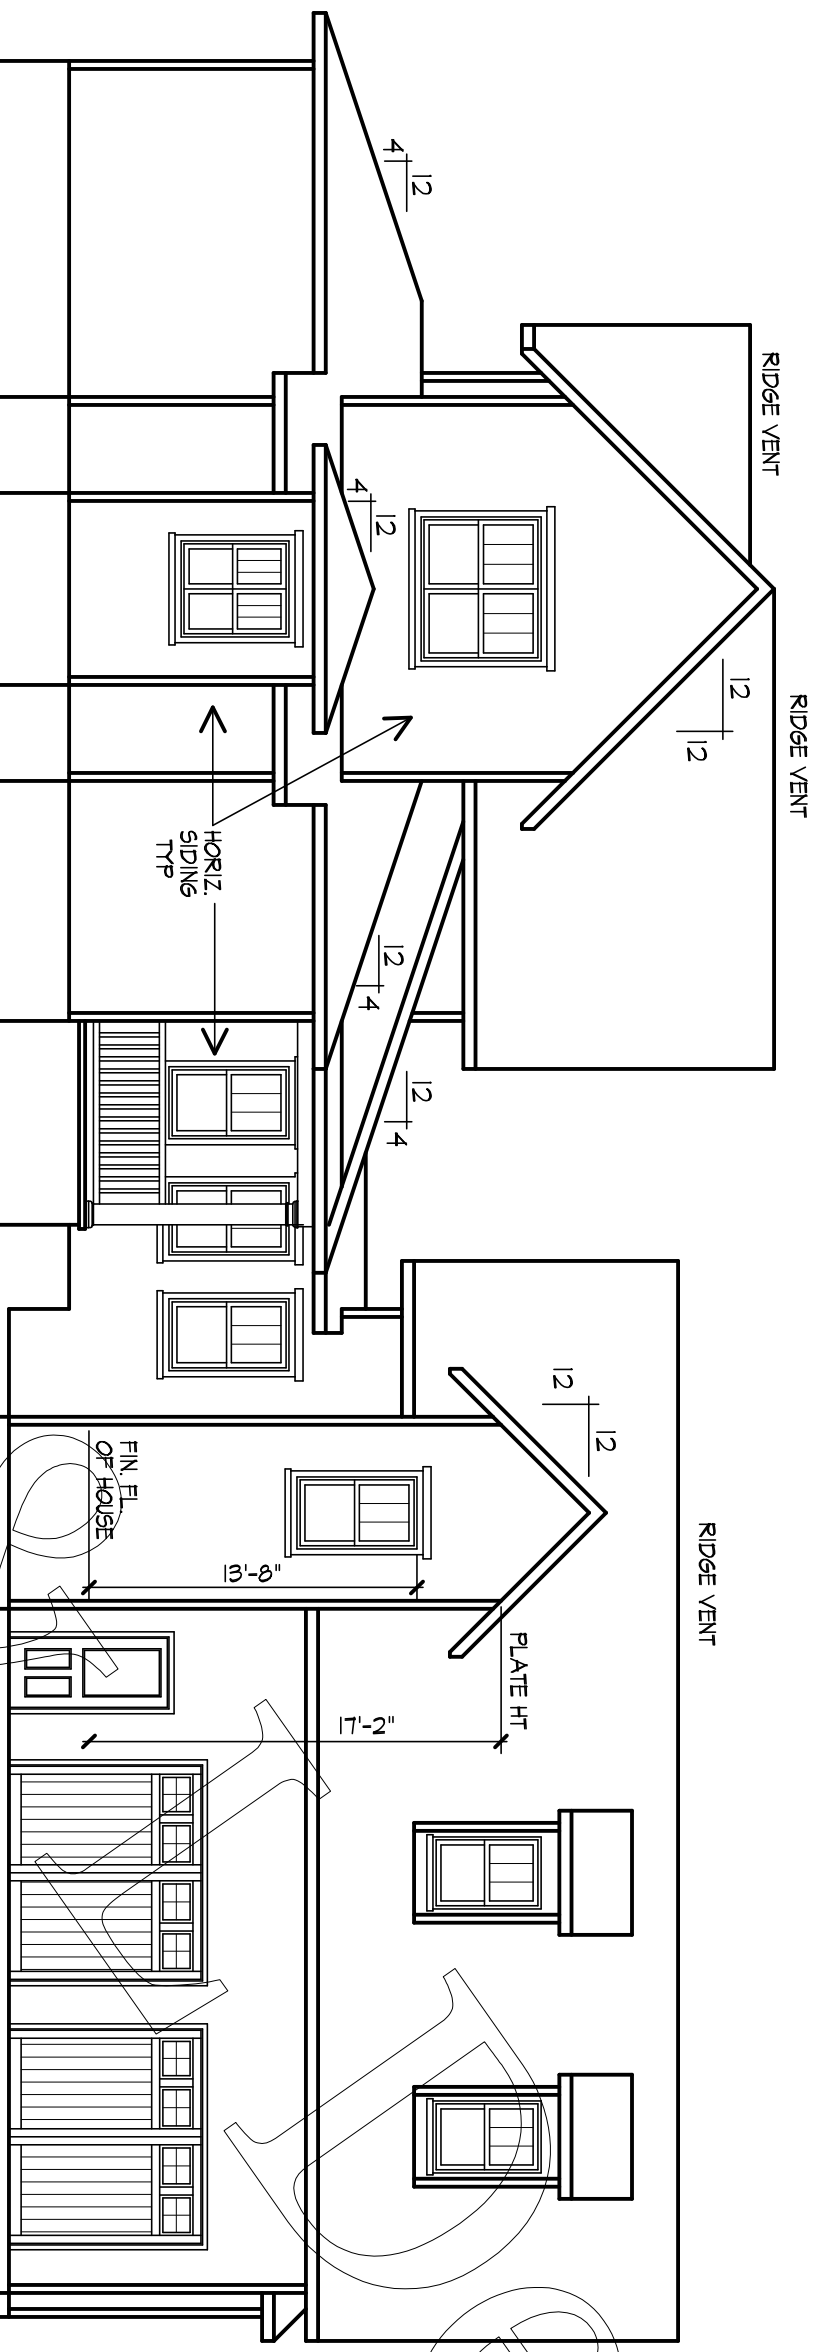

LEFT SIDE ELEVATION
SCALE: 1/8" = 1'-0"

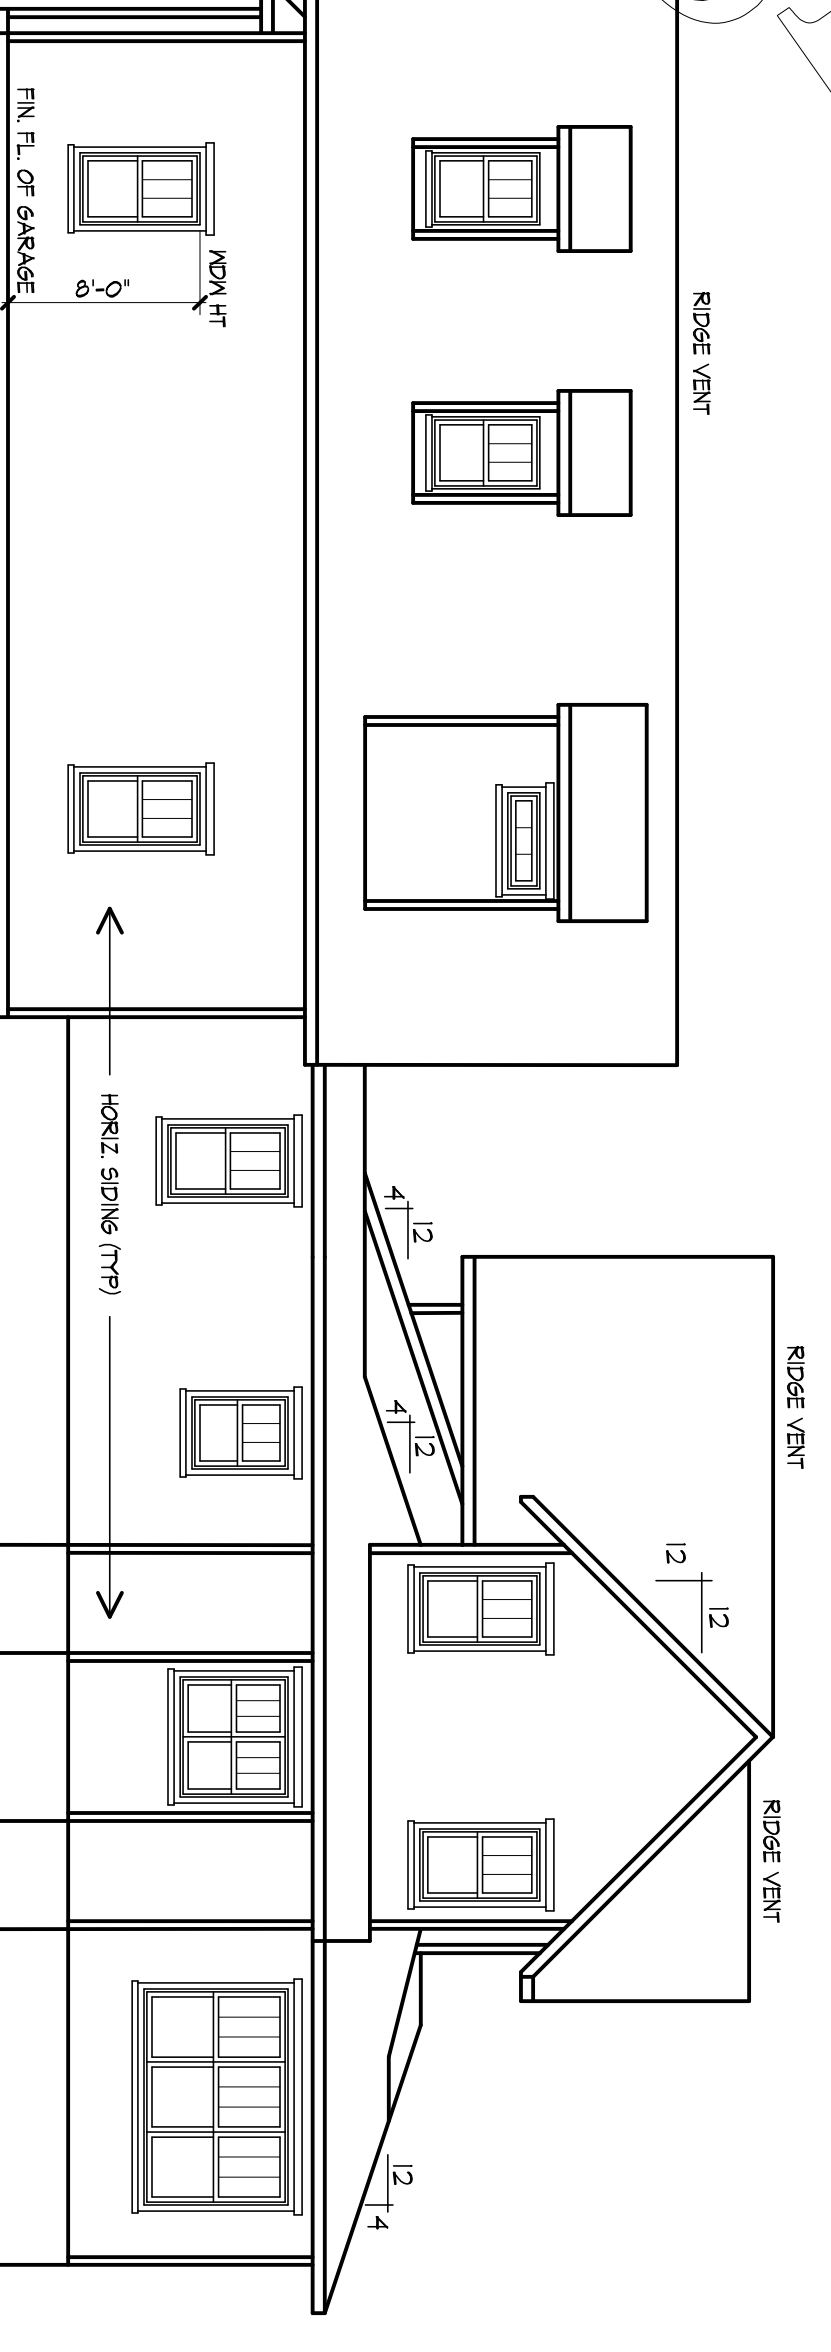

RIGHT SIDE ELEVATION
SCALE: 1/8" = 1'-0"

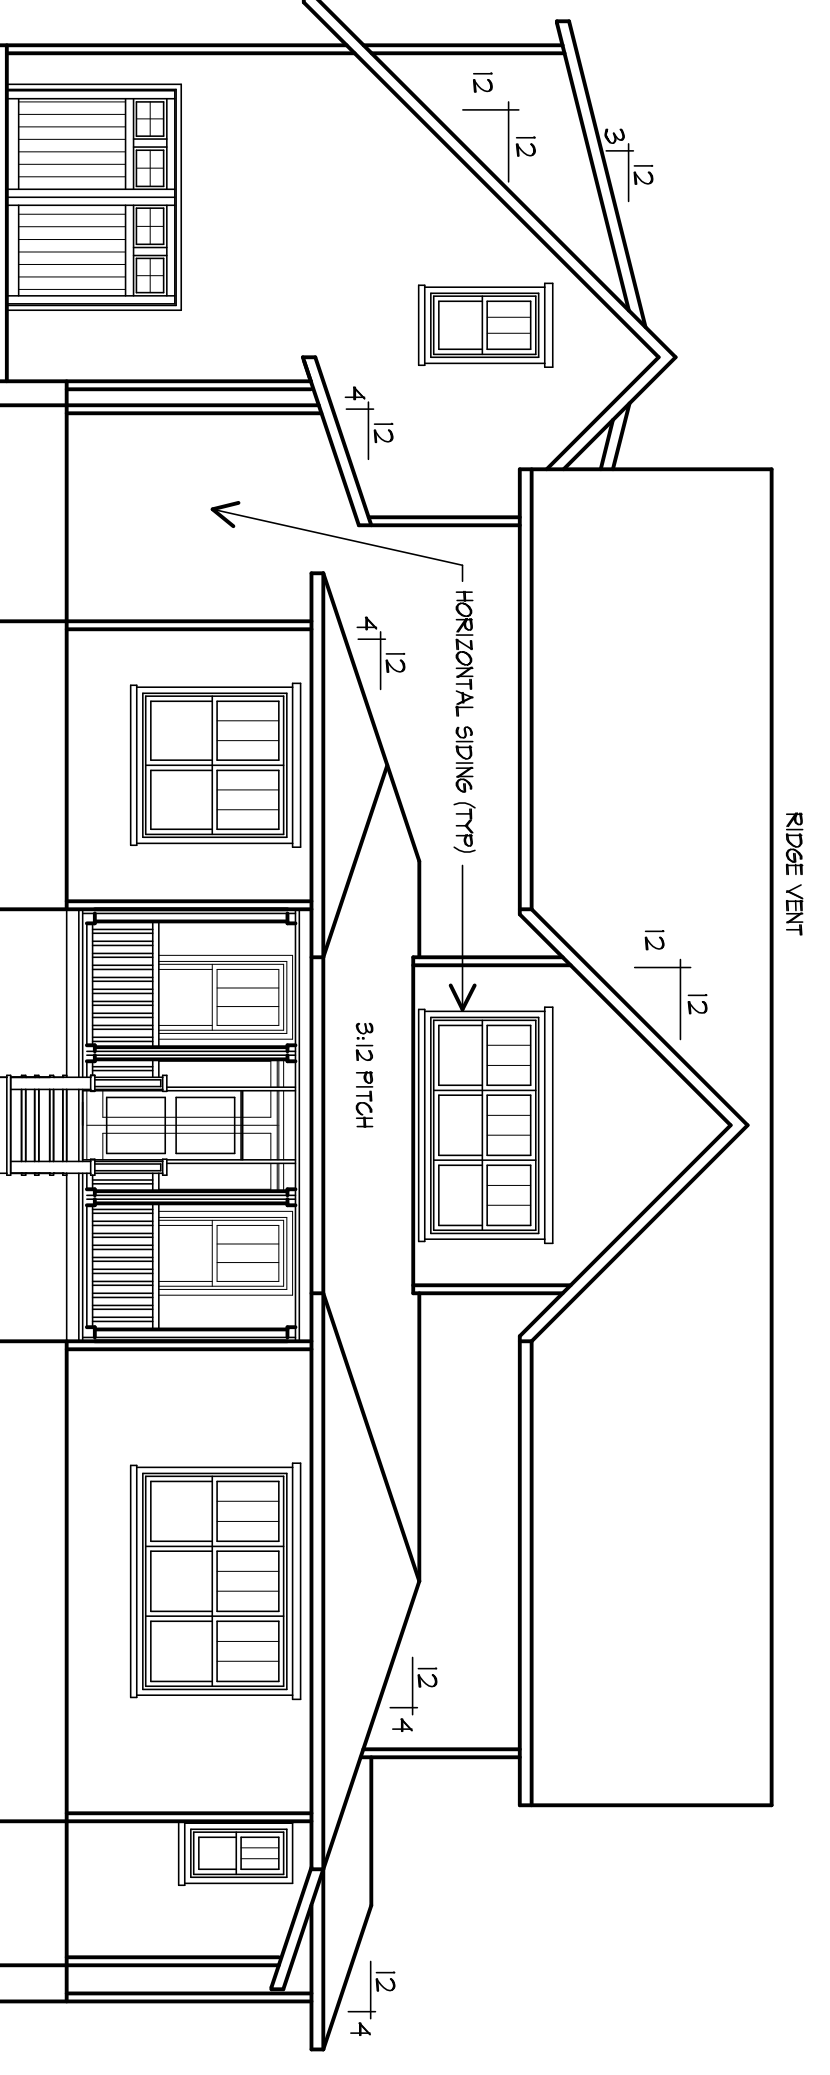

REAR ELEVATION
SCALE: 1/8" = 1'-0"

It is the sole responsibility of the contractor and/or builder to determine whether these plans conform to all standards, provisions, requirements, methods of construction, and structures provided by applicable building codes, any other local agencies, and in accordance with good engineering and construction practice. D & L Design Group, Inc. does not assume liability for any deviation or discrepancy in these plans. If a discrepancy is discovered, please contact D & L Design Group, Inc. before continuing work.

NOTICE TO CONTRACTOR
All construction shall comply with current NC Building Codes and applicable local codes, ordinances and regulations.

APPROVED
Unsealed building only review
Partial liability responsibility
Not compliance with the code

08/31/2020




Notes:
This plan conforms to
N.C. State Building Code
Residential Code, 2018 Edition

D & L
DESIGN GROUP, INC.
custom and stock home plans

PO BOX 1162
CLAYTON, NC
27528


919-553-1966
dl.designgroup.com

**HENDRICKS
RESIDENCE**

Plan no.: **DL3228-C**

Date:	05/29/2018
Revisions:	5/5/2020
Index:	1. ELEVATIONS 2. FOUNDATION 3. FIRST FLOOR 4. SECOND FLOOR 5. 1ST FL STRUCT 6. 2ND FL STRUCT 7. ROOF LAYOUT D1. NOTES & DETAILS D2. DETAILS
ELEVATIONS	
Sheet:	1 OF 1

THIS HOME DESIGN IS PROTECTED BY FEDERAL COPYRIGHT LAWS. BY YOUR PURCHASE OF THIS PLAN FROM D&L DESIGN GROUP, INC. YOU ARE GRANTED A LIMITED USAGE LICENSE TO CONSTRUCT ONE HOME OF THIS DESIGN. LICENSE IS LIMITED TO ONE HOME. PURCHASER MAY NOT SELL OR OTHERWISE TRANSFER THIS DESIGN TO ANY OTHER ENTITY. UNAUTHORIZED USE OF THIS DESIGN SHALL CONSTITUTE INTELLECTUAL INFRINGEMENT AND VIOLATION OF THE COPYRIGHT. WITHOUT FURTHER NOTICE D&L DESIGN GROUP, INC. WILL PROSECUTE TO THE FULLEST ALLOWED BY LAW.

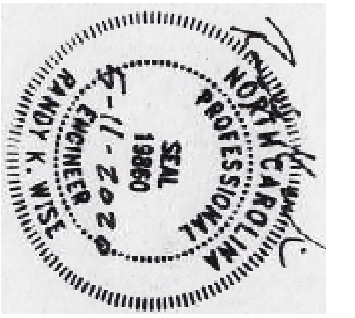


THIS DOCUMENT IS THE PROPERTY OF WISE ENGINEERING, INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. ANY VIOLATION OF THESE TERMS SHALL BE SUBJECT TO PROSECUTION TO THE FULLEST EXTENT OF THE LAW. WISE ENGINEERING, INC. 2018

FOUNDATION PLAN

SCALE: 1/4" = 1'-0"

NOTES:
1. ALL CONCRETE SHALL BE READY-MIXED TO BE 30' MPA (4000 PSI) CONCRETE.
2. ALL REINFORCING SHALL BE #4 BARS UNLESS OTHERWISE NOTED.
3. CONNECTIONS TO BE SHOWN IN DETAILS.

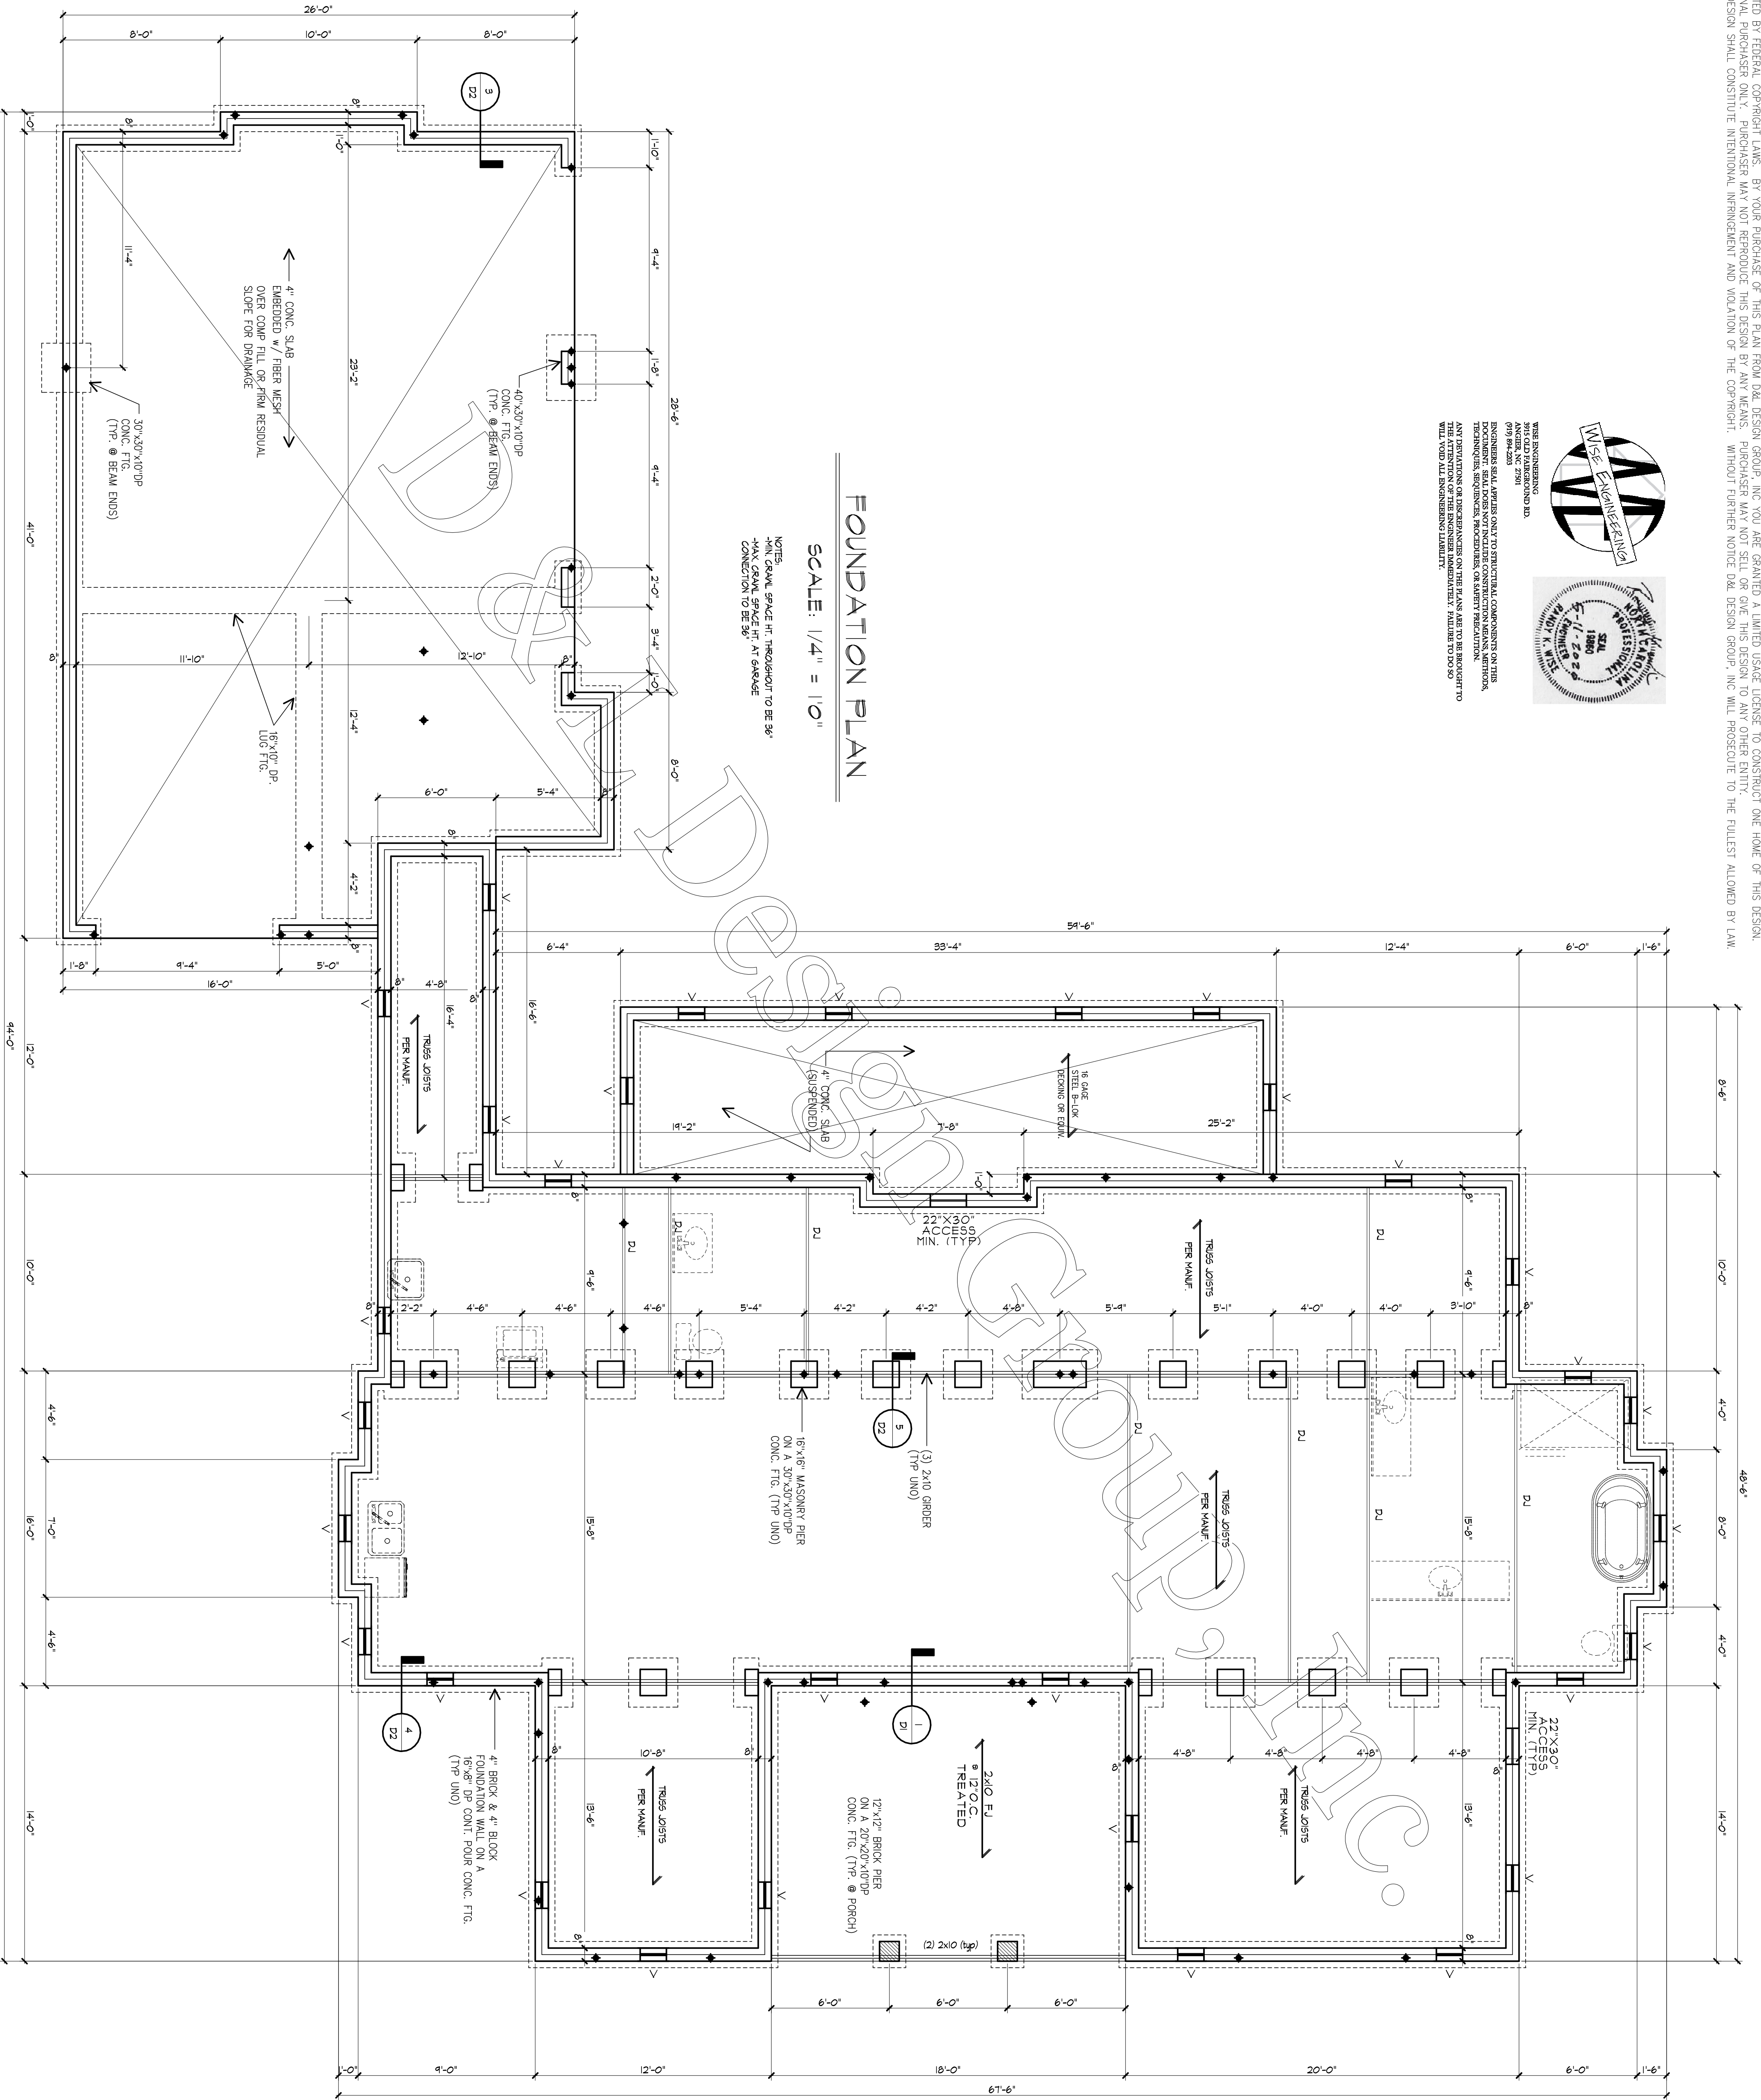

It is the sole responsibility of the contractor and/or builder to determine whether these plans conform to all standards, provisions, requirements, methods of construction, and structures provided by applicable building codes, any other local agencies, and in accordance with good engineering and construction practice. D & L Design Group, Inc. does not assume liability for any deviation or discrepancy in these plans. If a discrepancy is discovered, please contact D & L Design Group, Inc. before continuing work.

The plan conforms to:
NC State Building Code:
Residential Code, 2018 edition

DESIGN GROUP, INC.
custom and stock home plans

PO BOX 1162
CLAYTON, NC
27528


919-553-1966
dldesigngroup.com

**HENDRICKS
RESIDENCE**

Plan no.: **DL3228-C**

<p>Date: 05/29/2018</p> <p>Revisions: 5/5/2020</p> <p>Index:</p> <ol style="list-style-type: none"> 1. ELEVATIONS 2. FOUNDATION 3. FIRST FLOOR 4. SECOND FLOOR 5. SEVEN STRUCT 6. 2ND FL. STRUCT 7. ROOF LAYOUT D1. NOTES & DETAILS D2. DETAILS 	<p style="text-align: center;">FOUNDATION</p> <p style="text-align: center;">Sheet 2 OF 1</p>
---	---

THIS HOME DESIGN IS PROTECTED BY FEDERAL COPYRIGHT LAWS. BY YOUR PURCHASE OF THIS PLAN FROM D&L DESIGN GROUP, INC YOU ARE GRANTED A LIMITED USAGE LICENSE TO CONSTRUCT ONE HOME OF THIS DESIGN. LICENSE IS GRANTED TO ORIGINAL PURCHASER ONLY. PURCHASER MAY NOT REPRODUCE THIS DESIGN BY ANY MEANS. PURCHASER MAY NOT SELL OR GIVE THIS DESIGN TO ANY OTHER ENTITY. UNAUTHORIZED USE OF THIS DESIGN SHALL CONSTITUTE INTENTIONAL INFRINGEMENT AND VIOLATION OF THE COPYRIGHT. WITHOUT FURTHER NOTICE D&L DESIGN GROUP, INC WILL PROSECUTE TO THE FULLEST ALLOWED BY LAW.

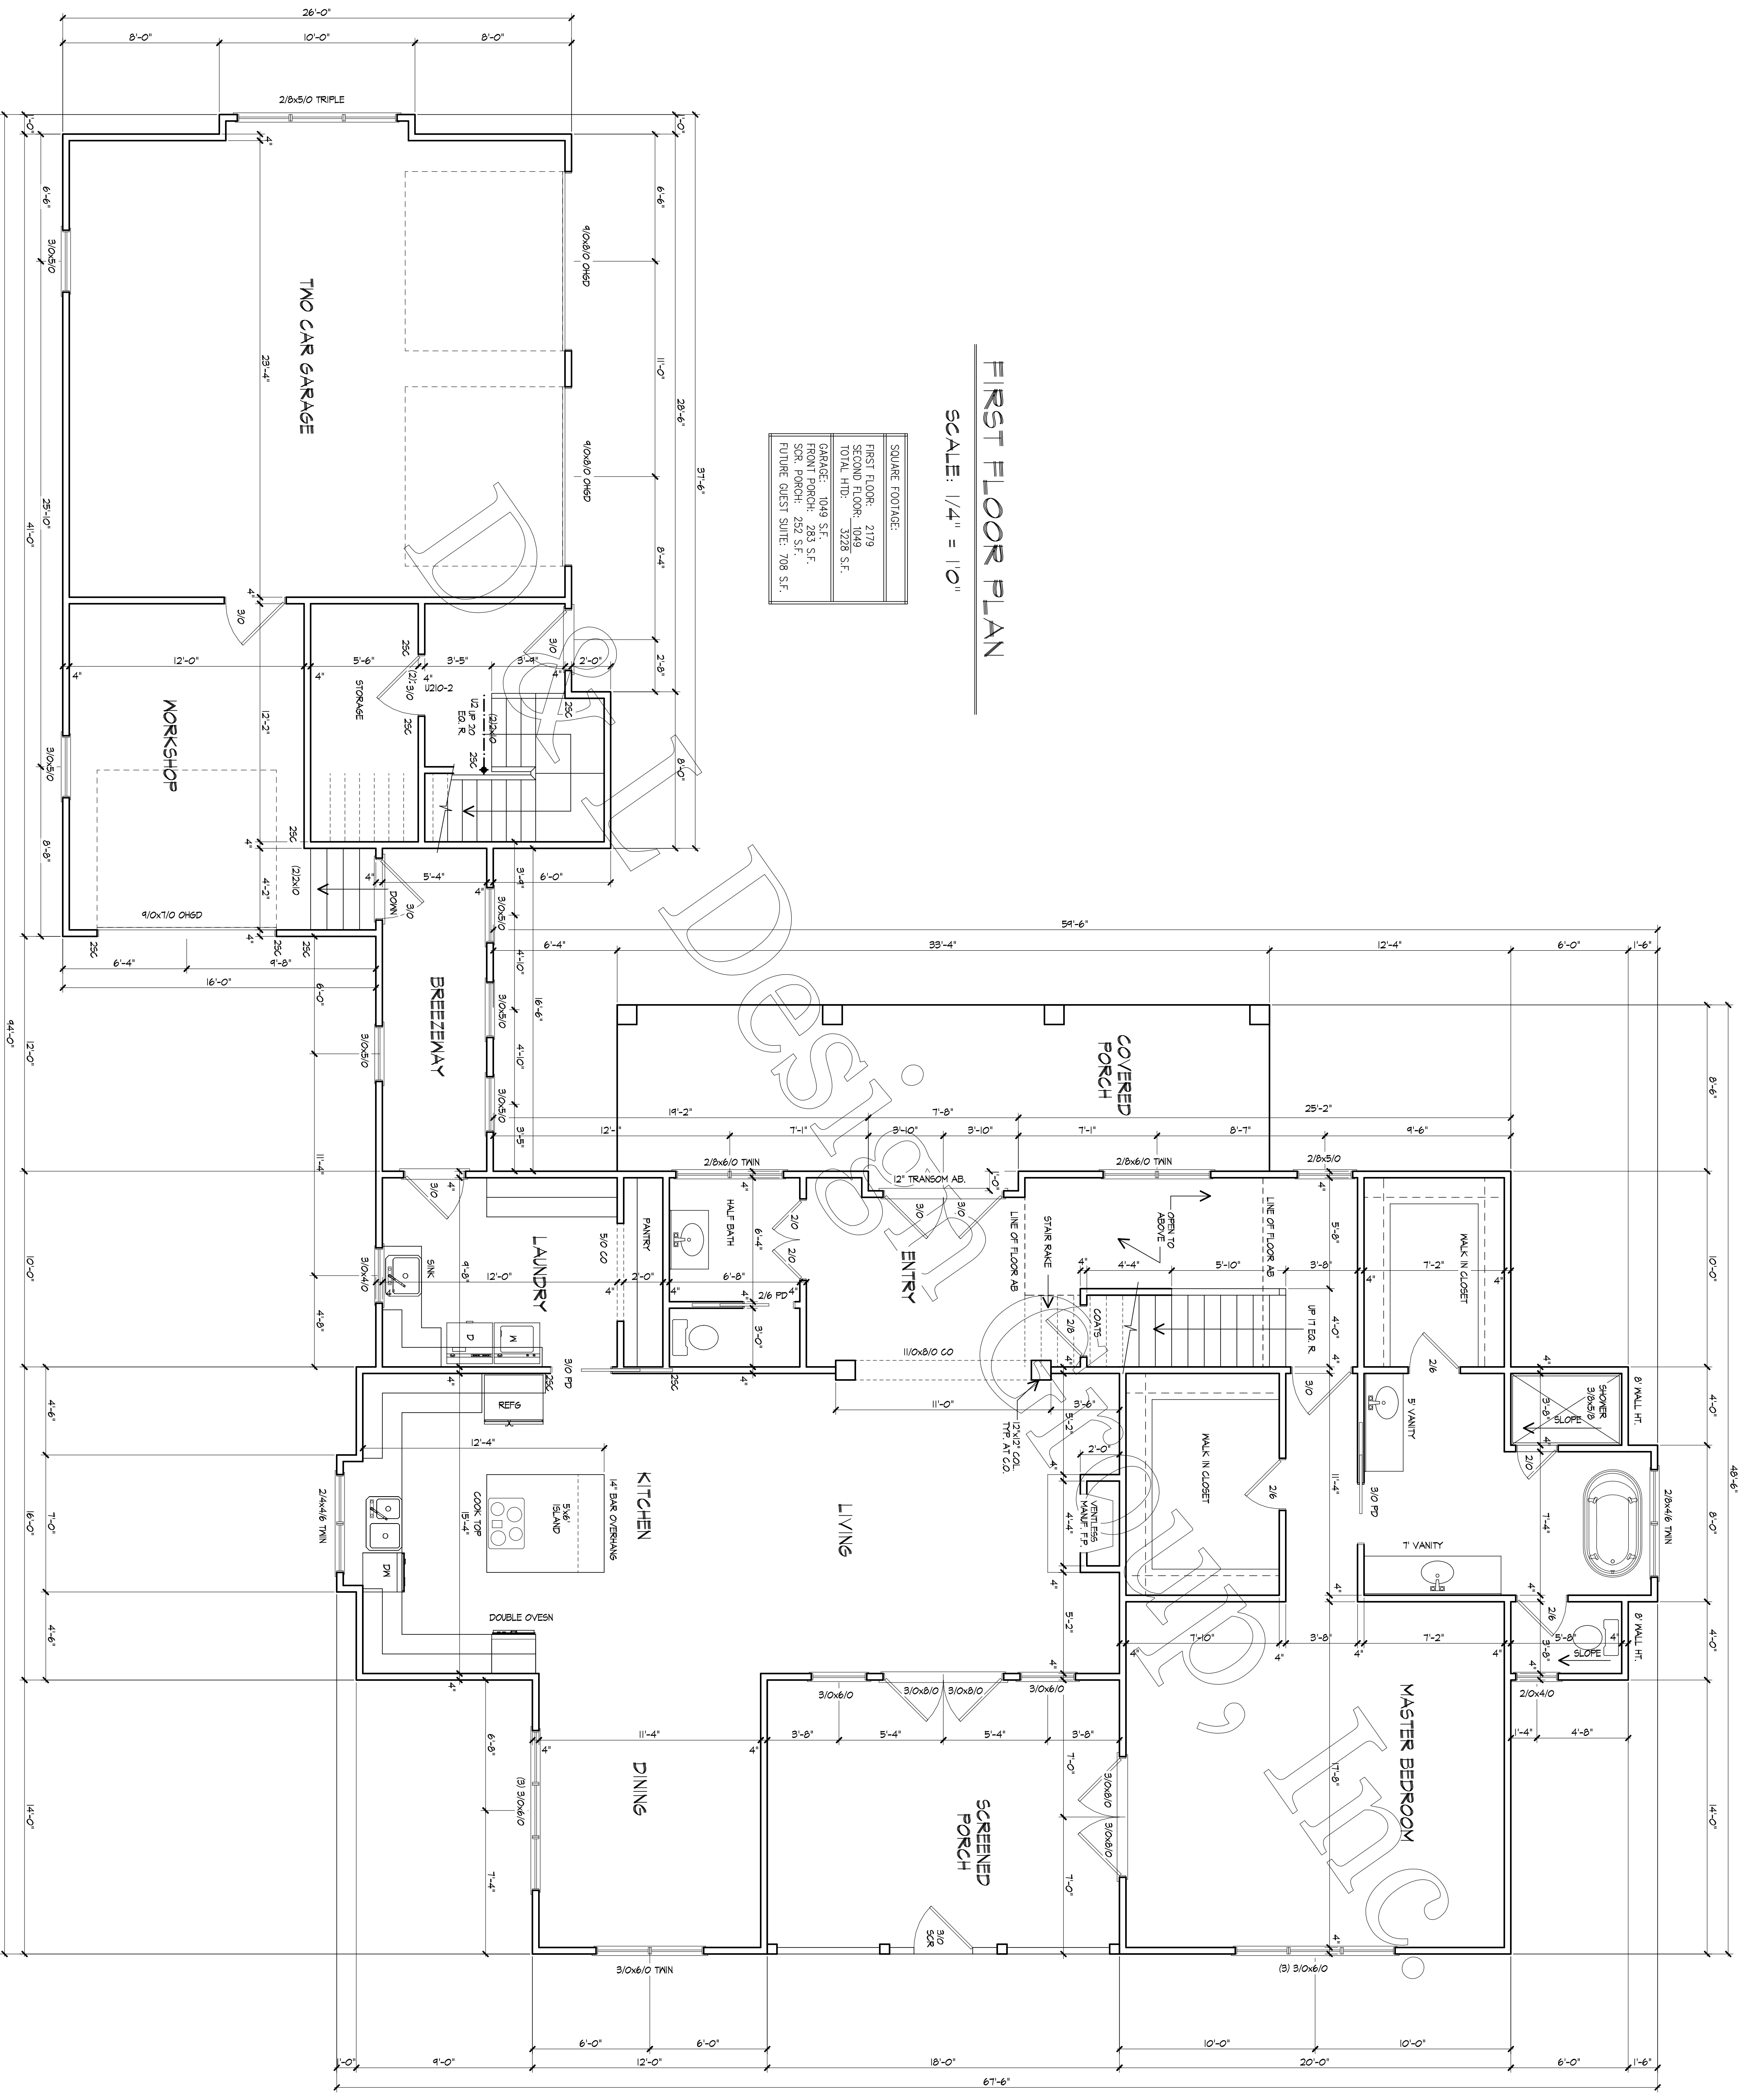

FIRST FLOOR PLAN

SCALE: 1/4" = 1'0"

SQUARE FOOTAGE:	
FIRST FLOOR:	2179
FOUND FLOOR:	1799
TOTAL FLOOR:	3978 S.F.
GARAGE: 1049 S.F.	
FRONT PORCH: 283 S.F.	
SCR. PORCH: 292 S.F.	
PULVE GUEST SUITE: 708 S.F.	

It is the sole responsibility of the contractor and/or builder to determine whether these plans conform to all standards, provisions, requirements, methods of construction, and structures provided by applicable building codes, any other local agencies, and in accordance with good engineering and construction practice. D & L Design Group, Inc. does not assume liability for any deviation or discrepancy in these plans. If a discrepancy is discovered, please contact D & L Design Group, Inc. before continuing work.



Notes:
This plan conforms to N.C. State Building Code Residential Code, 2018 edition

<p>DESIGN GROUP, INC. custom and stock home plans</p>	PO BOX 1162 CLAYTON, NC 27528 919-553-1966 dldesigngroup.com	<p>HENDRICKS RESIDENCE</p> <p>Plan no.: DL3228-C</p>
	<p>Date: 05/29/2018 Revisions: 5/5/2020</p>	

Date:	05/29/2018
Revisions:	5/5/2020
Index:	1. ELEVATIONS 2. FOUNDATION 3. FIRST FLOOR 4. SECOND FLOOR 5. 1ST FL STRUCT 6. 2ND FL STRUCT 7. ROOF LAYOUT D1. NOTES & DETAILS D2. DETAILS
Sheet:	3 OF 1

THIS HOME DESIGN IS PROTECTED BY FEDERAL COPYRIGHT LAWS. BY YOUR PURCHASE OF THIS PLAN FROM D&L DESIGN GROUP, INC YOU ARE GRANTED A LIMITED USAGE LICENSE TO CONSTRUCT ONE HOME OF THIS DESIGN. LICENSE IS GRANTED TO ORIGINAL PURCHASER ONLY. PURCHASER MAY NOT REPRODUCE THIS DESIGN BY ANY MEANS. PURCHASER MAY NOT SELL OR GIVE THIS DESIGN TO ANY OTHER ENTITY. UNAUTHORIZED USE OF THIS DESIGN SHALL CONSTITUTE INTENTIONAL INFRINGEMENT AND VIOLATION OF THE COPYRIGHT. WITHOUT FURTHER NOTICE D&L DESIGN GROUP, INC WILL PROSECUTE TO THE FULLEST ALLOWED BY LAW.

FUTURE GUEST SUITE: 135 SQ. FT.

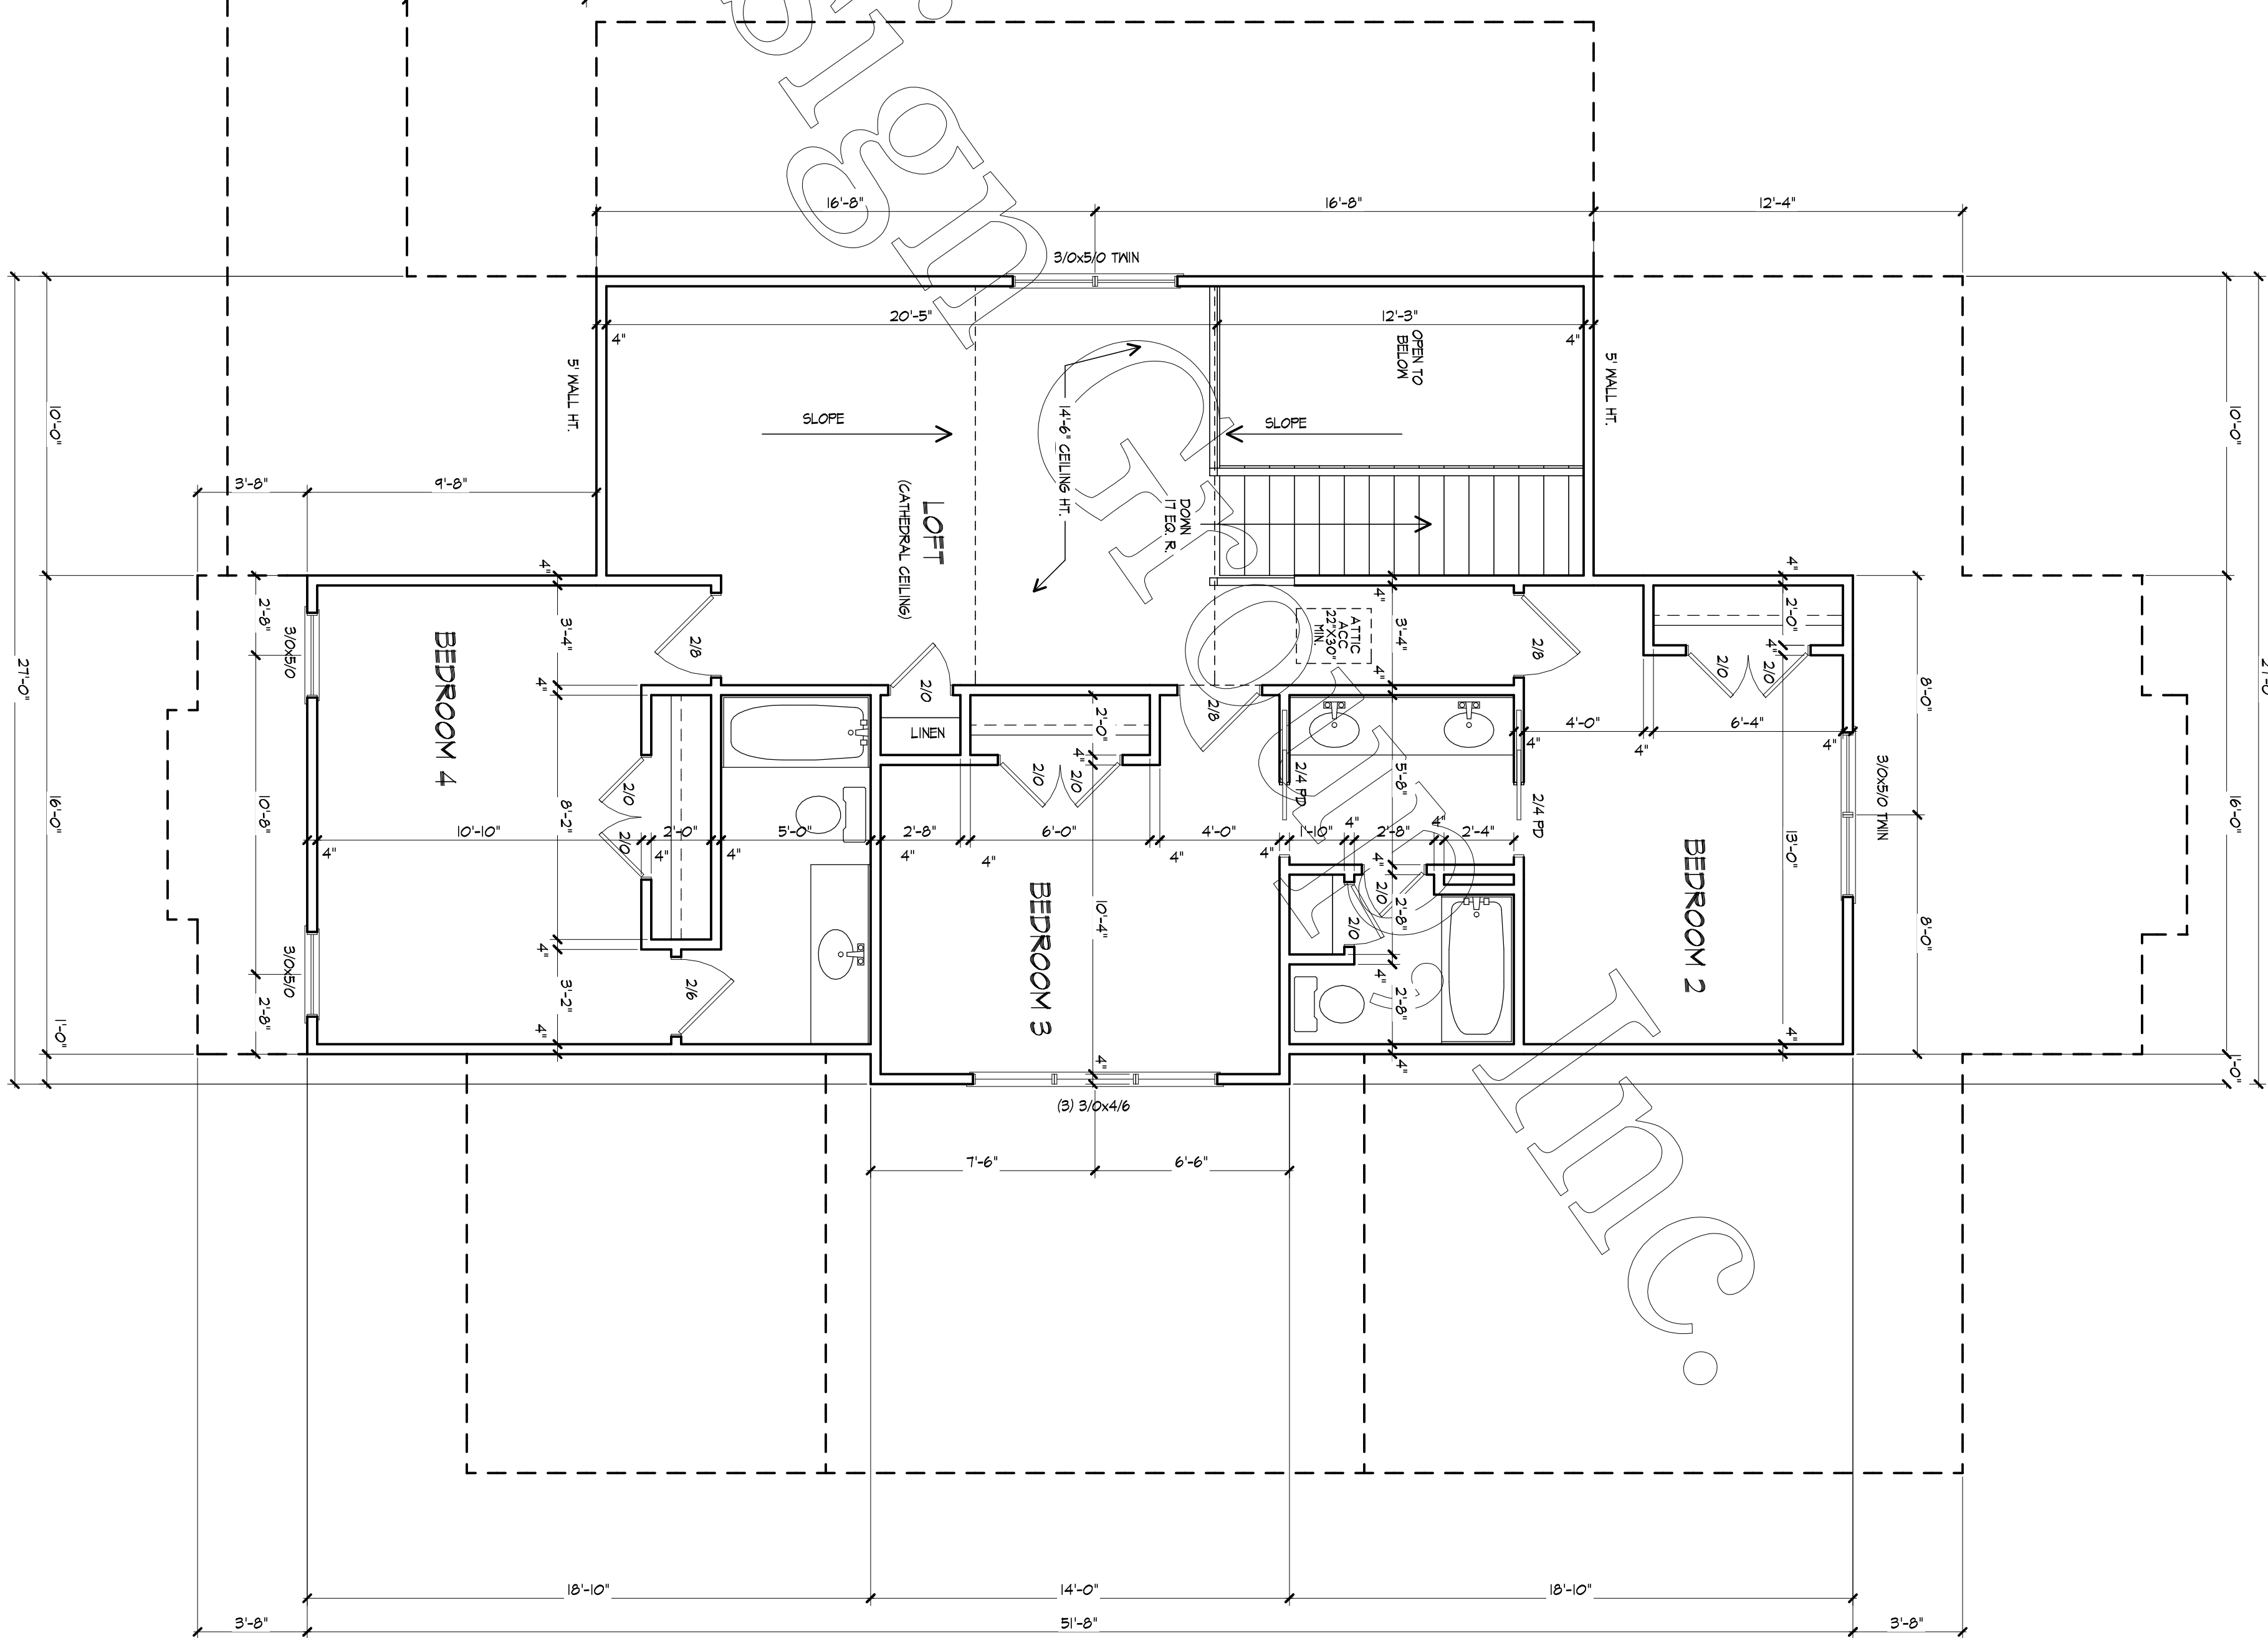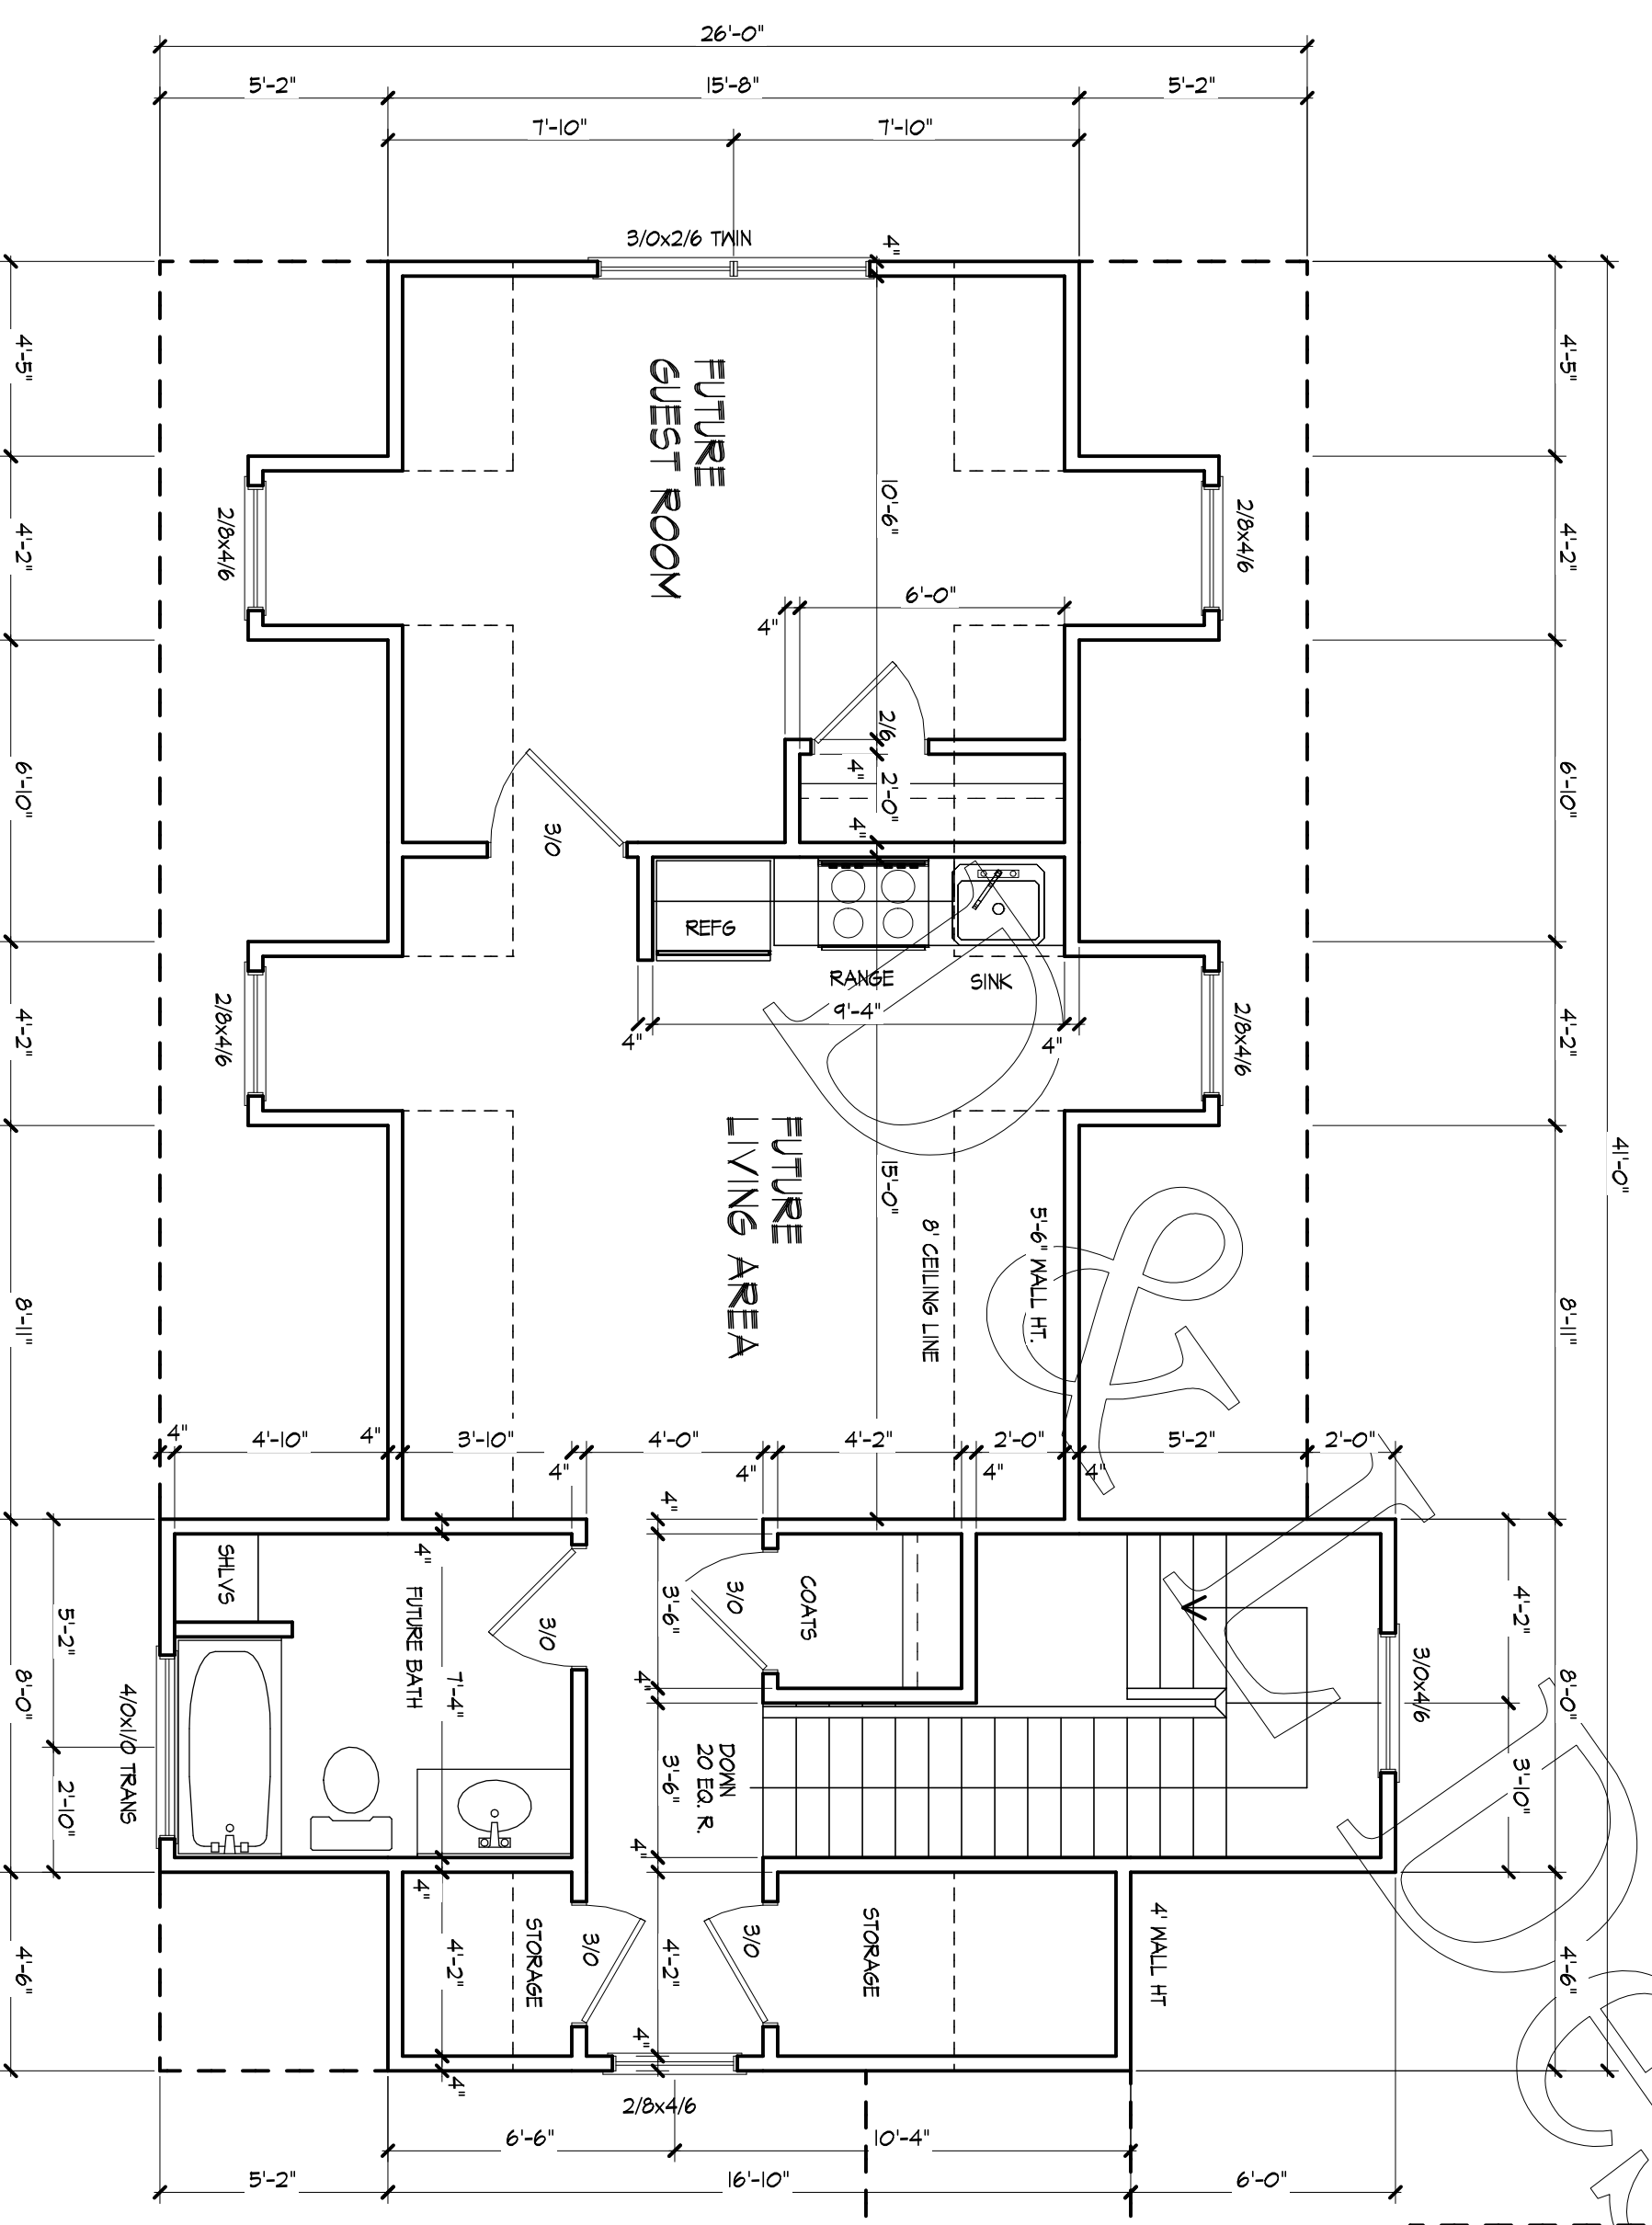

SECOND FLOOR PLAN

SCALE: 1/4" = 10"
1049 SQ. FT. HTD. THIS FLOOR



Notes:
This plan conforms to the International Residential Code, 2018 edition.

It is the sole responsibility of the contractor and/or builder to determine whether these plans conform to all standards, provisions, requirements, methods of construction, and structures provided by applicable building codes, any other local agencies, and in accordance with good engineering and construction practice. D & L Design Group, Inc. does not assume liability for any deviation or discrepancy in these plans. If a discrepancy is discovered, please contact D & L Design Group, Inc. before continuing work.

Date:	05/29/2018
Revisions:	5/5/2020
Index:	1. ELEVATIONS 2. FOUNDATION 3. FIRST FLOOR 4. SECOND FLOOR 5. 1ST FL. STRUCT 6. 2ND FL. STRUCT 7. ROOF LAYOUT D1. NOTES D2. DETAILS
Sheet:	4 OF 7

<p>D & L DESIGN GROUP, INC. custom and stock home plans</p>	PO BOX 1162 CLAYTON, NC 27528 919-553-1966 dldesigngroup.com	<p>HENDRICKS RESIDENCE</p>
	<p>Plan no.: DL3228-C</p>	

THIS HOME DESIGN IS PROTECTED BY FEDERAL COPYRIGHT LAWS. BY YOUR PURCHASE OF THIS PLAN FROM D&L DESIGN GROUP, INC YOU ARE GRANTED A LIMITED USAGE LICENSE TO CONSTRUCT ONE HOME OF THIS DESIGN. NO OTHER RIGHTS ARE GRANTED. THIS DESIGN IS THE PROPERTY OF D&L DESIGN GROUP, INC. ANY REPRODUCTION OR MODIFICATION OF THIS DESIGN SHALL CONSTITUTE A VIOLATION OF FEDERAL COPYRIGHT LAWS AND WILL BE PROSECUTED TO THE FULLEST ALLOWED BY LAW.

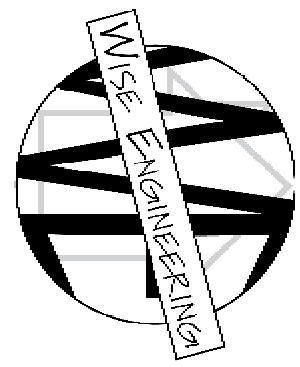


WSP ENGINEERING
 609 W. 23RD ST.
 ANDERSON, NC 29624
 (704) 924-2300
 WSP ENGINEERING IS AN EQUAL OPPORTUNITY EMPLOYER. ALL CONTRACTORS AND SUBCONTRACTORS MUST BE LICENSED AND INSURED. WE DO NOT ACCEPT ANY LIABILITY FOR CONSTRUCTION DEFECTS, INJURY, OR DEATH. ANY REVISIONS OR DEVIATIONS FROM THE PLANS ARE TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT OR ENGINEER. ANY REVISIONS OR DEVIATIONS FROM THE PLANS ARE TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT OR ENGINEER. ANY REVISIONS OR DEVIATIONS FROM THE PLANS ARE TO BE BROUGHT TO THE ATTENTION OF THE ARCHITECT OR ENGINEER.

STRUCTURAL NOTES:


1. CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL DIMENSIONS AND SQUARE FOOTAGE PRIOR TO CONSTRUCTION. ENGINEER DOES NOT ASSUME RESPONSIBILITY FOR DISCREPANCIES OF PLAN ONCE CONSTRUCTION HAS BEGUN.
2. ALL LUMBER TO BE #2 SPF U.N.O. ALL LVL LUMBER TO BE 1.75" WIDE NOMINAL EACH SINGLE MEMBER AND FB=2600 PSI, E=1.9M PSI
3. ALL LOAD BEARING EXTERIOR WINDOW HEADERS WITH MAXIMUM SPAN OF 5'-6" SHOULD BE A (2) 2X10 W/ (1) 2X4 KING STUD AND (1) 2X4 JACK STUD NAILED TOGETHER W/ (2) 10D @ 8" O.C. PROVIDED THE TOP OF WINDOW HEIGHT IS 6'-8", MINIMUM BOTTOM OF WINDOW HEIGHT IS 1'-6". OTHERWISE REFER TO TABLE R502.5(1) & (2).
4. ALL INTERIOR LOAD BEARING HEADERS TO BE (2) 2X10 U.N.O. REFER TO TABLE R502.5(1) & (2) FOR JACK STUD REQUIREMENTS FOR HEADER SPANS FOR INTERIOR AND EXTERIOR LOAD CONDITIONS UNLESS NOTED ON PLAN.
5. REFER TO 2018 NC BUILDING CODE SECTION R602 FOR CONSTRUCTION OF ALL WALLS OVER 10'-0" IN HEIGHT.
6. ALL STEEL SHALL BE ASTM A50 F_y=50 KSI MIN
7. ALL EXTERIOR LUMBER TO BE #2 SYP PT
8. ALL CONCRETE, F_c = 3000 PSI MIN
9. PRESUMPTIVE BEARING CAPACITY = 2000 PSF
10. PROVIDE WALL BRACING PER 2018 NC RESIDENTIAL CODE SECTION 602.10
11. PROVIDE 1/2" ANCHOR BOLTS AT 6'-0" CENTERS WITH A MIN. 7" EMBEDMENT. PLACE ANCHOR BOLTS 12" FROM EACH PLATE END SECTION.
12. ALL SPECIFIED ENGINEERED LUMBER PRODUCTS ARE DESIGNED IN ACCORDANCE WITH THE PRODUCTS SUPPLIED FROM THE FOLLOWING APPROVED MANUFACTURERS:
 Weyerhaeuser(Leve); Louisiana-Pacific (LP); Boise Cascade; Georgia Pacific (GP); OR OTHERS, PROVIDED THE PRODUCTS HAVE, AT MINIMUM: FB=2600 psi AND E = 1.9M psi.
 APPROPRIATE SIZED METAL HANGERS SHOULD BE MANUFACTURED BY EITHER SIMPSON STRONG TIE OR UNITED STEEL PRODUCTS (USP)

HEADER SPAN	MAXIMUM STUD SPACING
3' OR LESS	16" O.C.
4'	24" O.C.
8'	1
12'	5
16'	6

MINIMUM NUMBER OF KING STUDS AT EACH END OF HEADERS IN EXTERIOR WALLS (PER 2018 NCBC R602.7.3)

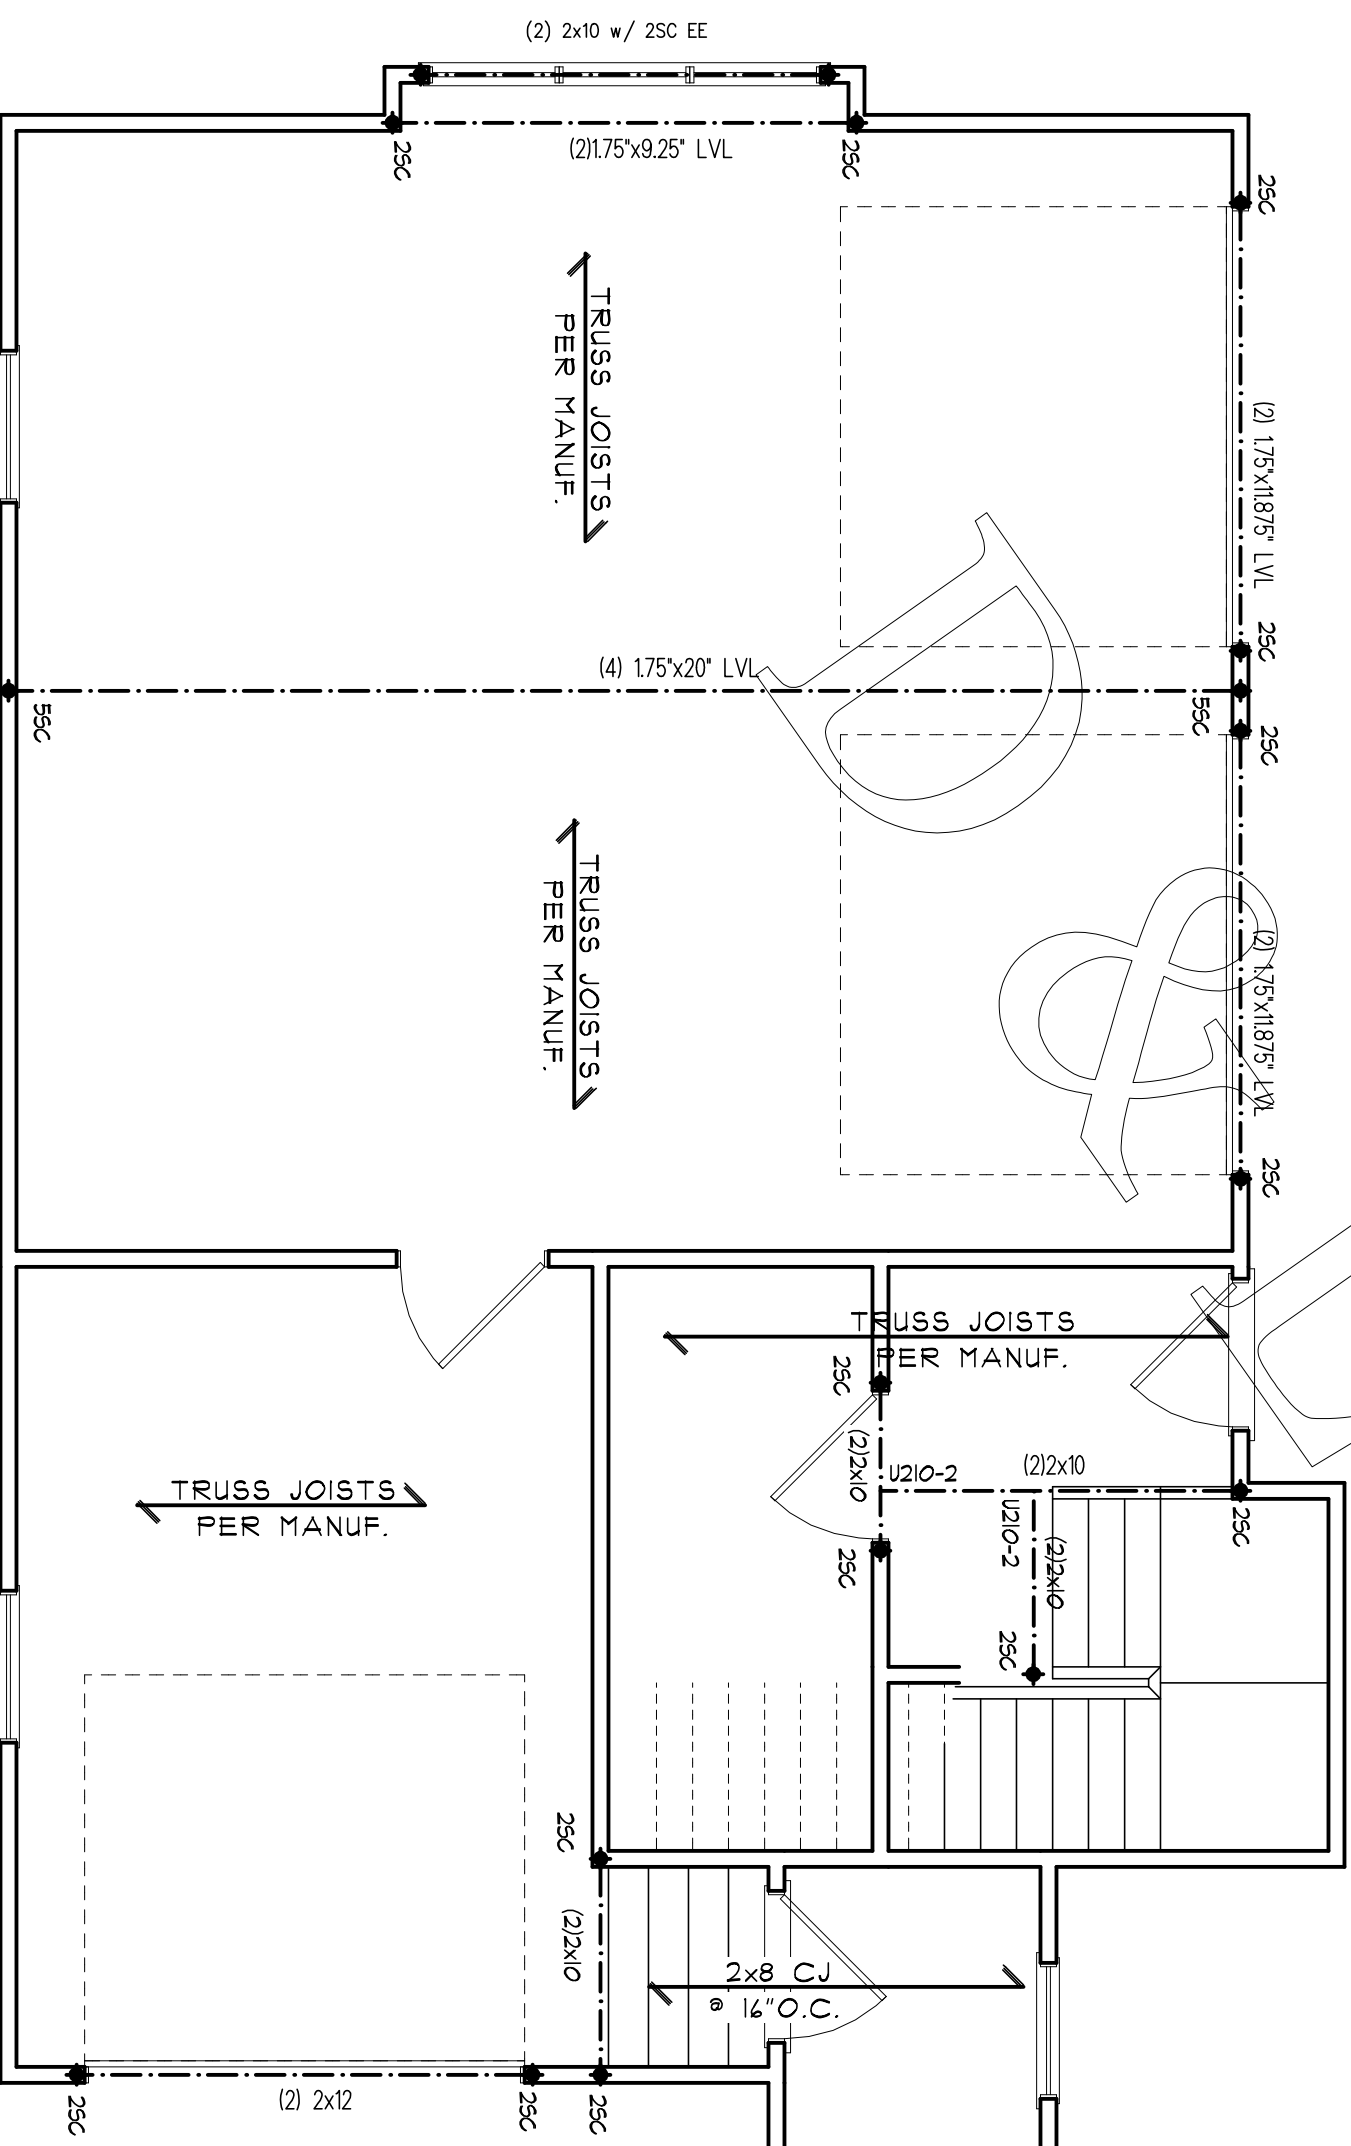

FIRST FLOOR STRUCTURAL PLAN
 SCALE: 1/4" = 10"

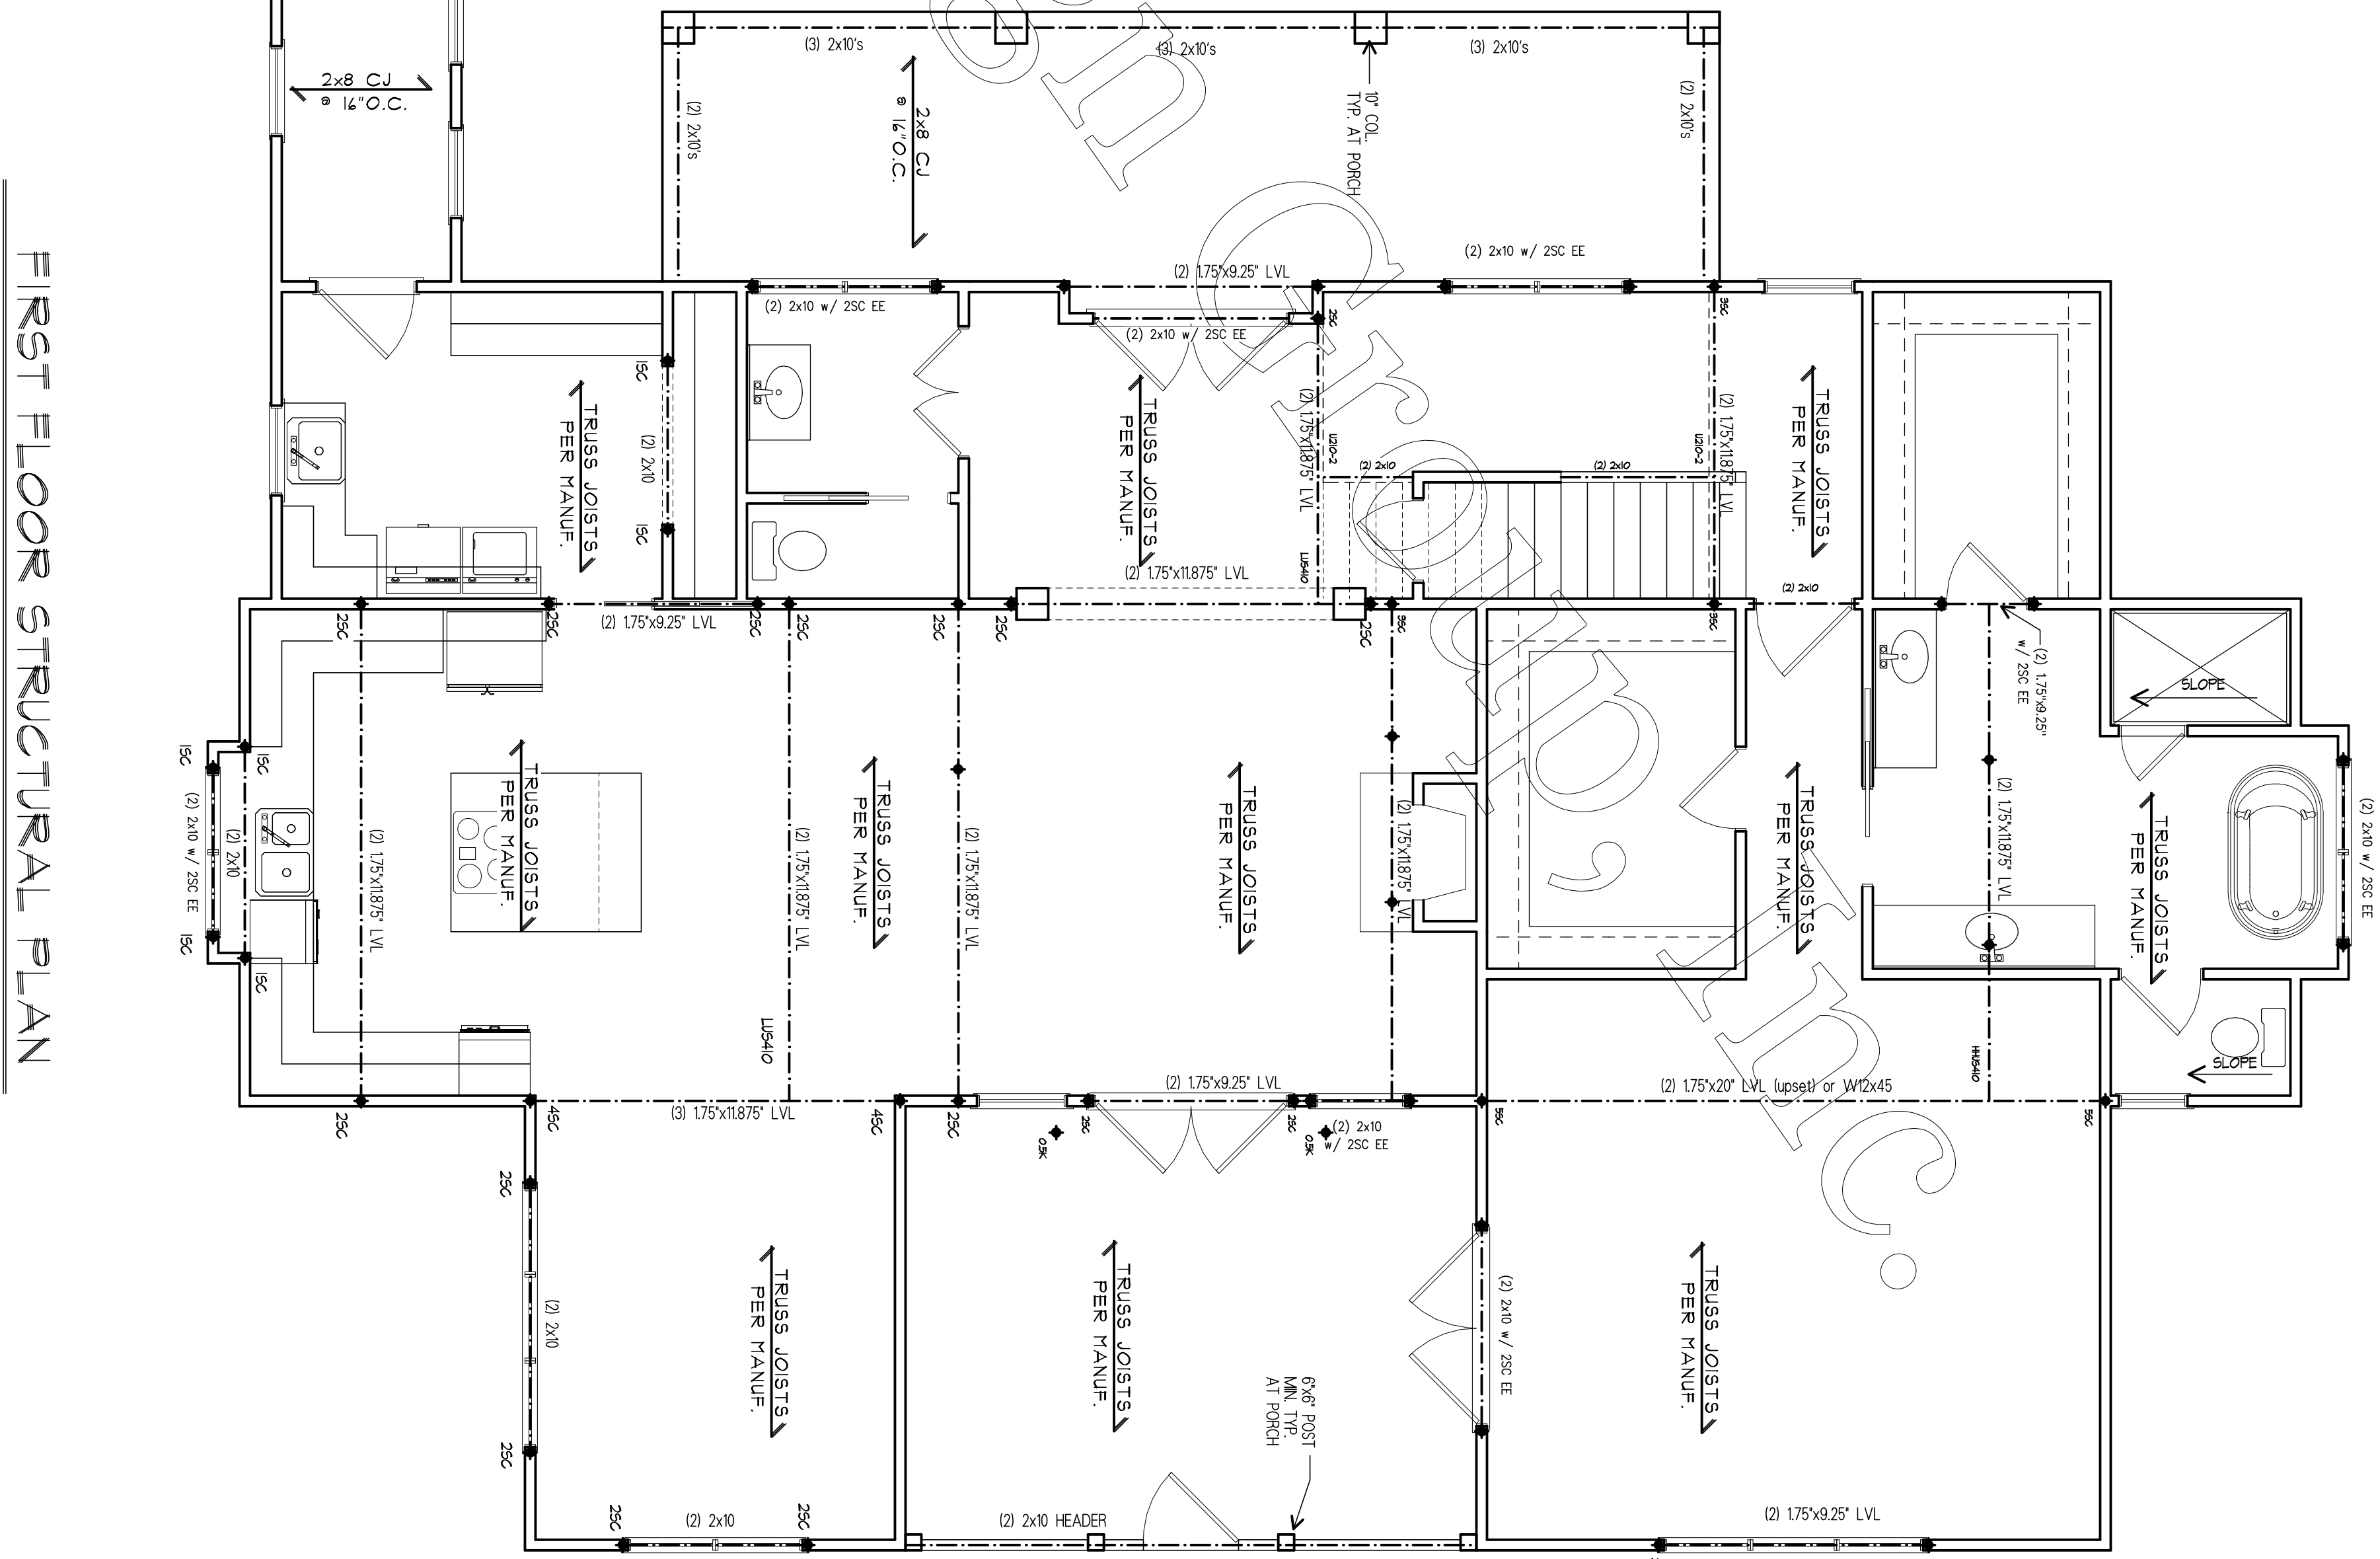

Notes:
 The plan conforms to N.C. State Building Code Residential Code, 2018 Edition.
 It is the sole responsibility of the contractor and/or builder to determine whether these plans conform to all standards, provisions, requirements, methods of construction, and structures provided by applicable building codes, any other local agencies, and in accordance with good engineering and construction practice. D & L Design Group, Inc. does not assume liability for any deviation or discrepancy in these plans. If a discrepancy is discovered, please contact D & L Design Group, Inc. before continuing work.

D & L
 DESIGN GROUP, INC.
custom and stock home plans

PO BOX 1162
 CLAYTON, NC
 27528



919-553-1966
 dlldesigngroup.com

**HENDRICKS
 RESIDENCE**



Plan no.: **DL3228-C**

Date:	05/29/2018
Revisions:	5/5/2020
Index:	1. ELEVATIONS 2. FOUNDATION 3. FIRST FLOOR 4. SECOND FLOOR 5. 1ST FL STRUCT 6. 2ND FL STRUCT 1. ROOF LAYOUT D1. NOTES & DETAILS D2. DETAILS
Sheet:	5 OF 1

THIS HOME DESIGN IS PROTECTED BY FEDERAL COPYRIGHT LAWS. BY YOUR PURCHASE OF THIS PLAN FROM D&L DESIGN GROUP, INC YOU ARE GRANTED A LIMITED USAGE LICENSE TO CONSTRUCT ONE HOME OF THIS DESIGN. THIS LICENSE IS NON-TRANSFERABLE. ANY REPRODUCTION OF THIS DESIGN OR ANY PART THEREOF WITHOUT THE WRITTEN PERMISSION OF D&L DESIGN GROUP, INC. IS STRICTLY PROHIBITED. UNAUTHORIZED USE OF THIS DESIGN SHALL CONSTITUTE INFRINGEMENT AND VIOLATION OF THE COPYRIGHT. WITHOUT FURTHER NOTICE D&L DESIGN GROUP, INC WILL PROSECUTE TO THE FULLEST ALLOWED BY LAW.

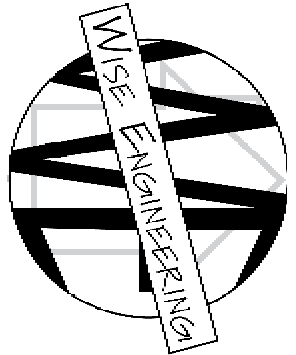

WISE ENGINEERING
 1400 S. WILSON ROAD
 SUITE 100
 WILSON, NC 27597
 (919) 684-2303
 www.wise-engineering.com
 ENGINEERS SEAL APPLIES ONLY TO STRUCTURAL COMPONENTS ON THIS PLAN. THIS SEAL DOES NOT GUARANTEE THE ACCURACY OF THE TECHNICAL REQUIREMENTS, SPECIFICATIONS, PROCEDURES, OR ANY OTHER INFORMATION. ANY DEVIATIONS OR OMISSIONS ON THE PLANS ARE TO BE BROUGHT TO THE ATTENTION OF THE ENGINEER IMMEDIATELY UPON FAILURE TO DO SO. THE SEAL IS THE ENGINEER'S LIABILITY.

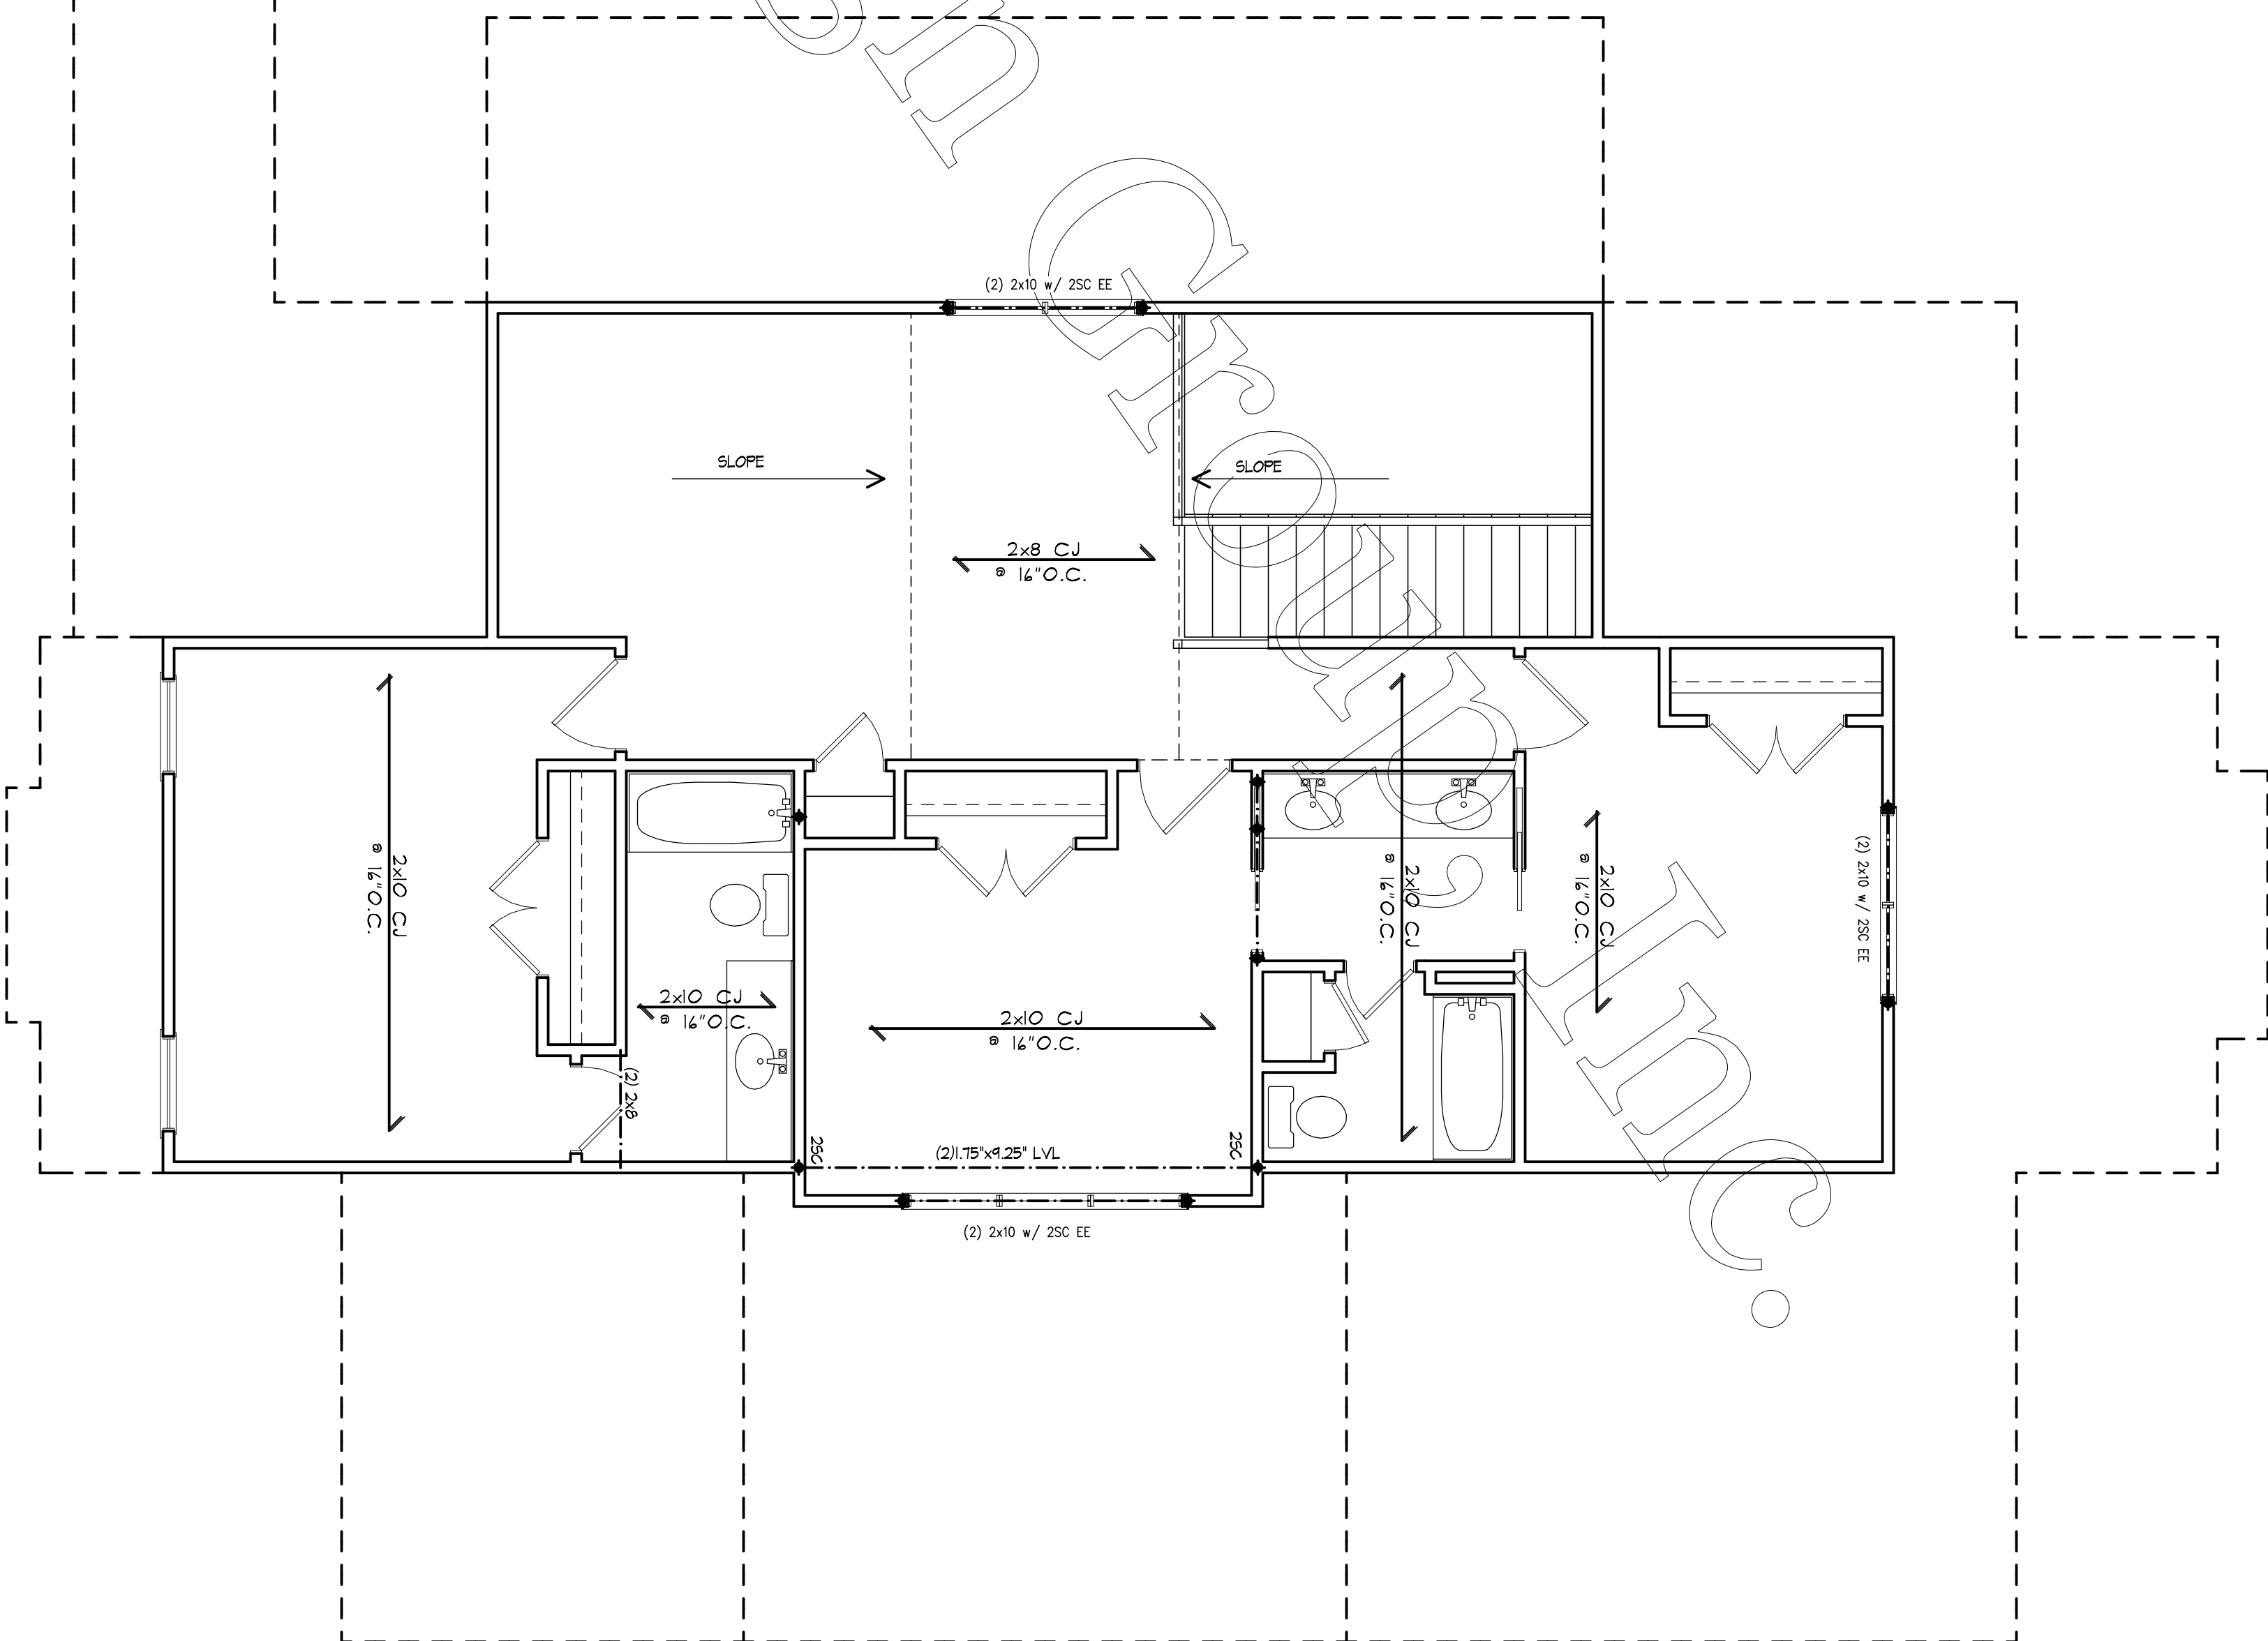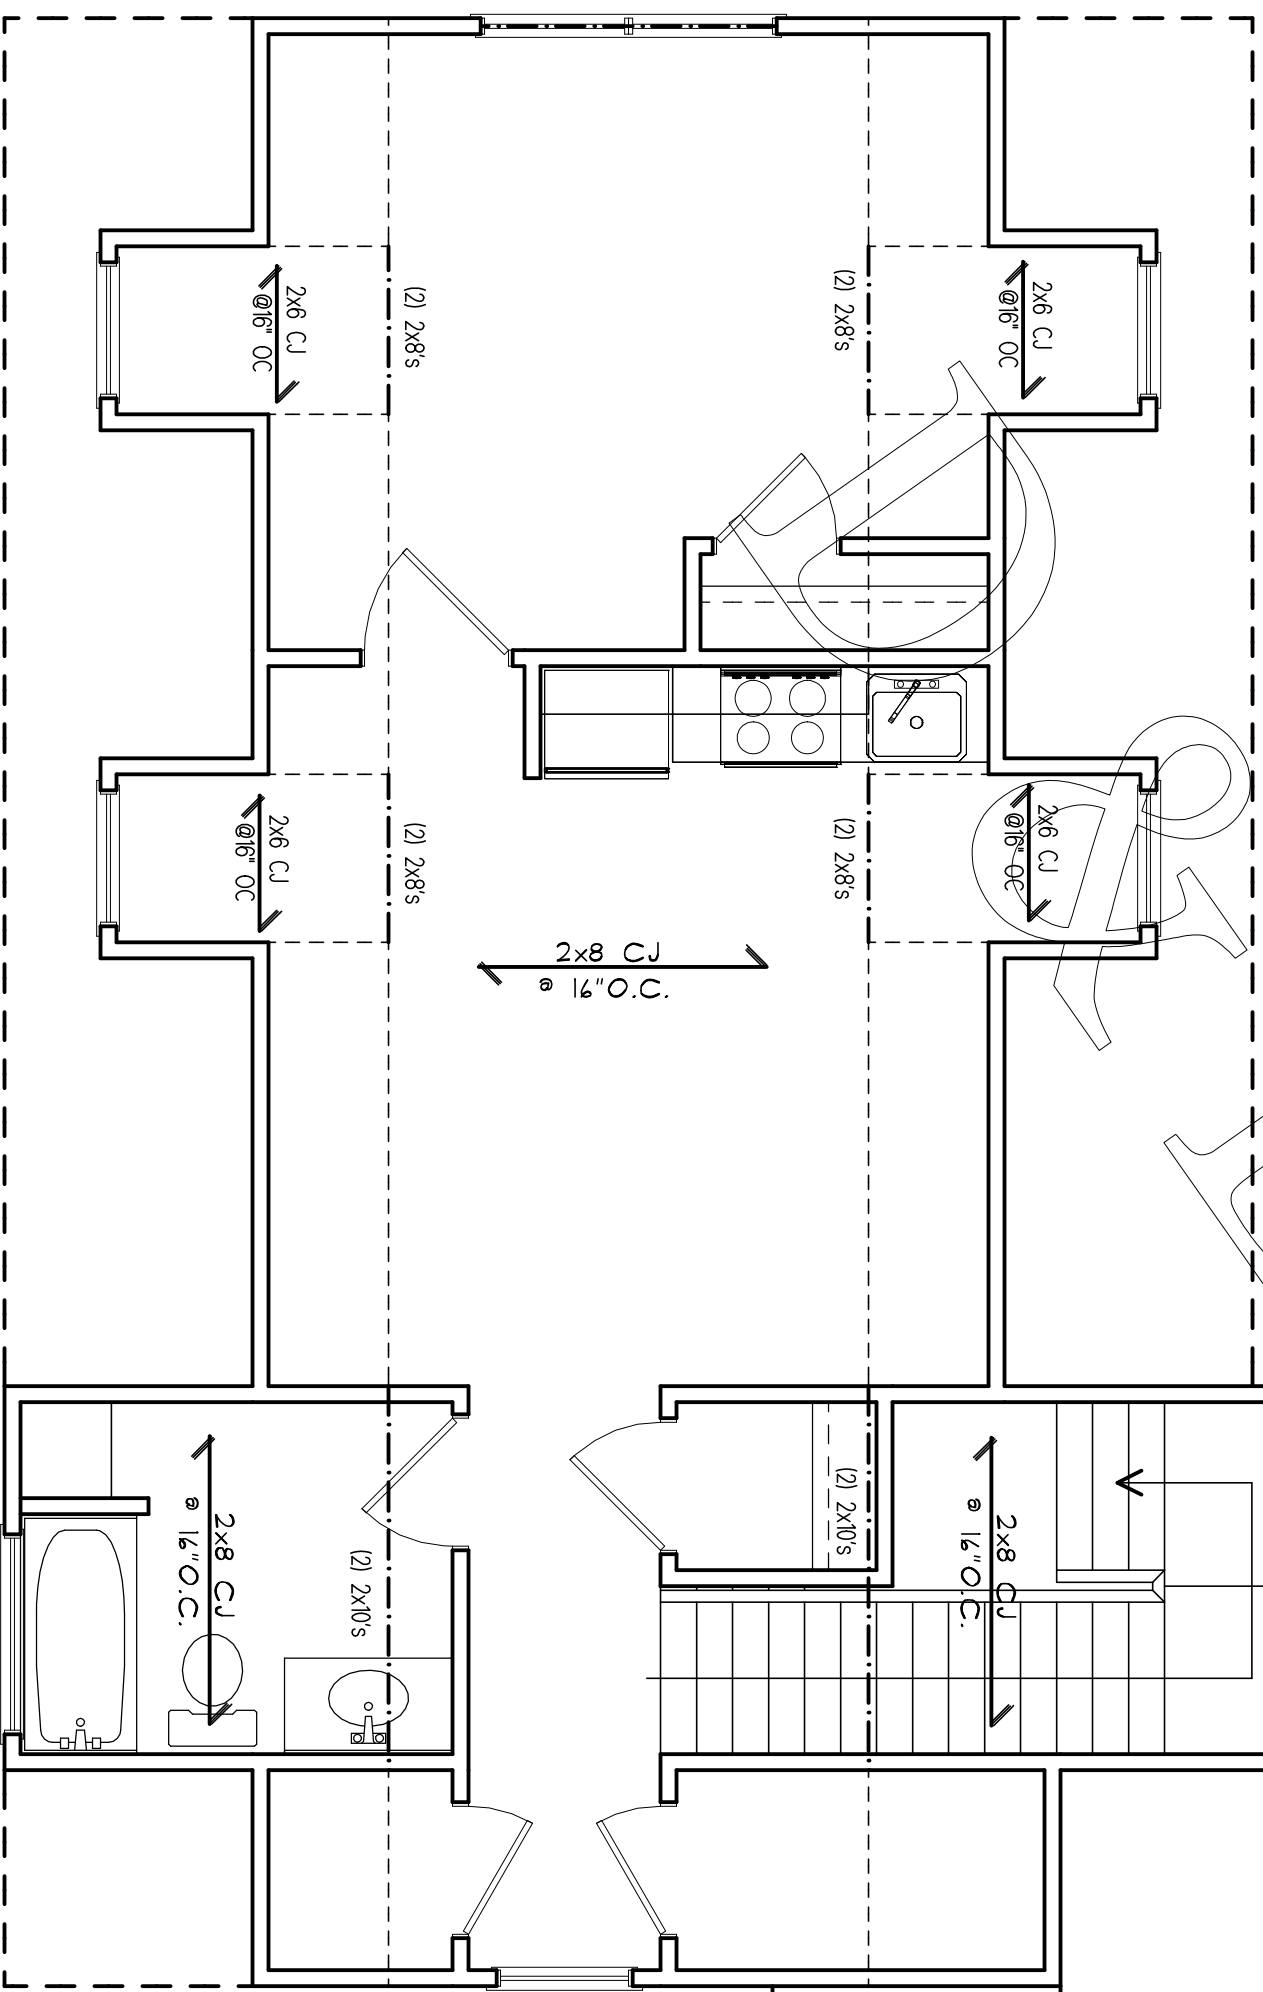

SECOND FLOOR STRUCTURAL PLAN
 SCALE: 1/4" = 1'-0"

Notes:
 The plan conforms to:
 N.C. State Building Code
 Residential Code, 2018 edition
 It is the sole responsibility of the contractor and/or builder to determine whether these plans conform to all standards, provisions, requirements, methods of construction, and structures provided by applicable building codes, any other local agencies, and in accordance with good engineering and construction practice. D & L Design Group, Inc. does not assume liability for any deviation or discrepancy in these plans. If a discrepancy is discovered, please contact D & L Design Group, Inc. before continuing work.

Date:	05/29/2018
Revisions:	5/5/2020
Index:	1. ELEVATIONS 2. FOUNDATION 3. FIRST FLOOR 4. SECOND FLOOR 5. STEEL STRUCTURE 6. 2ND FL STRUCTURE 7. ROOF LAYOUT D1. NOTES & DETAILS D2. DETAILS
Sheet:	6 OF 7

D & L
 DESIGN GROUP, INC.
custom and stock home plans


PO BOX 1162
 CLAYTON, NC
 27528

919-553-1966
 dldesigngroup.com


**HENDRICKS
 RESIDENCE**

Plan no.: **DL3228-C**

THIS HOME DESIGN IS PROTECTED BY FEDERAL COPYRIGHT LAWS. BY YOUR PURCHASE OF THIS PLAN FROM D&L DESIGN GROUP, INC YOU ARE GRANTED A LIMITED USAGE LICENSE TO CONSTRUCT ONE HOME OF THIS DESIGN. LICENSE IS GRANTED TO ORIGINAL PURCHASER ONLY. PURCHASER MAY NOT REPRODUCE THIS DESIGN BY ANY MEANS. PURCHASER MAY NOT SELL OR GIVE THIS DESIGN TO ANY OTHER ENTITY. UNAUTHORIZED USE OF THIS DESIGN SHALL CONSTITUTE INTENTIONAL INFRINGEMENT AND VIOLATION OF THE COPYRIGHT. WITHOUT FURTHER NOTICE D&L DESIGN GROUP, INC WILL PROSECUTE TO THE FULLEST ALLOWED BY LAW.



WISE ENGINEERING
 3915 OLD FARMINGTON RD.
 RAYNES, NC 27581
 919-553-1966
 www.dlsgroup.com
 ENGINEERS SHALL AT ALL TIMES OBTAIN THE NECESSARY PERMITS AND APPROVALS FROM THE LOCAL, STATE AND FEDERAL AGENCIES. ENGINEERS SHALL NOT BE RESPONSIBLE FOR THE CONSTRUCTION OF THIS PROJECT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS. THE ENGINEER'S LIABILITY IS LIMITED TO THE PROFESSIONAL SERVICES PROVIDED AND SHALL NOT BE EXTENDED TO ANY OTHER LIABILITY. THE ENGINEER SHALL NOT BE RESPONSIBLE FOR THE CONSTRUCTION OF THIS PROJECT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS. THE ENGINEER'S LIABILITY IS LIMITED TO THE PROFESSIONAL SERVICES PROVIDED AND SHALL NOT BE EXTENDED TO ANY OTHER LIABILITY.

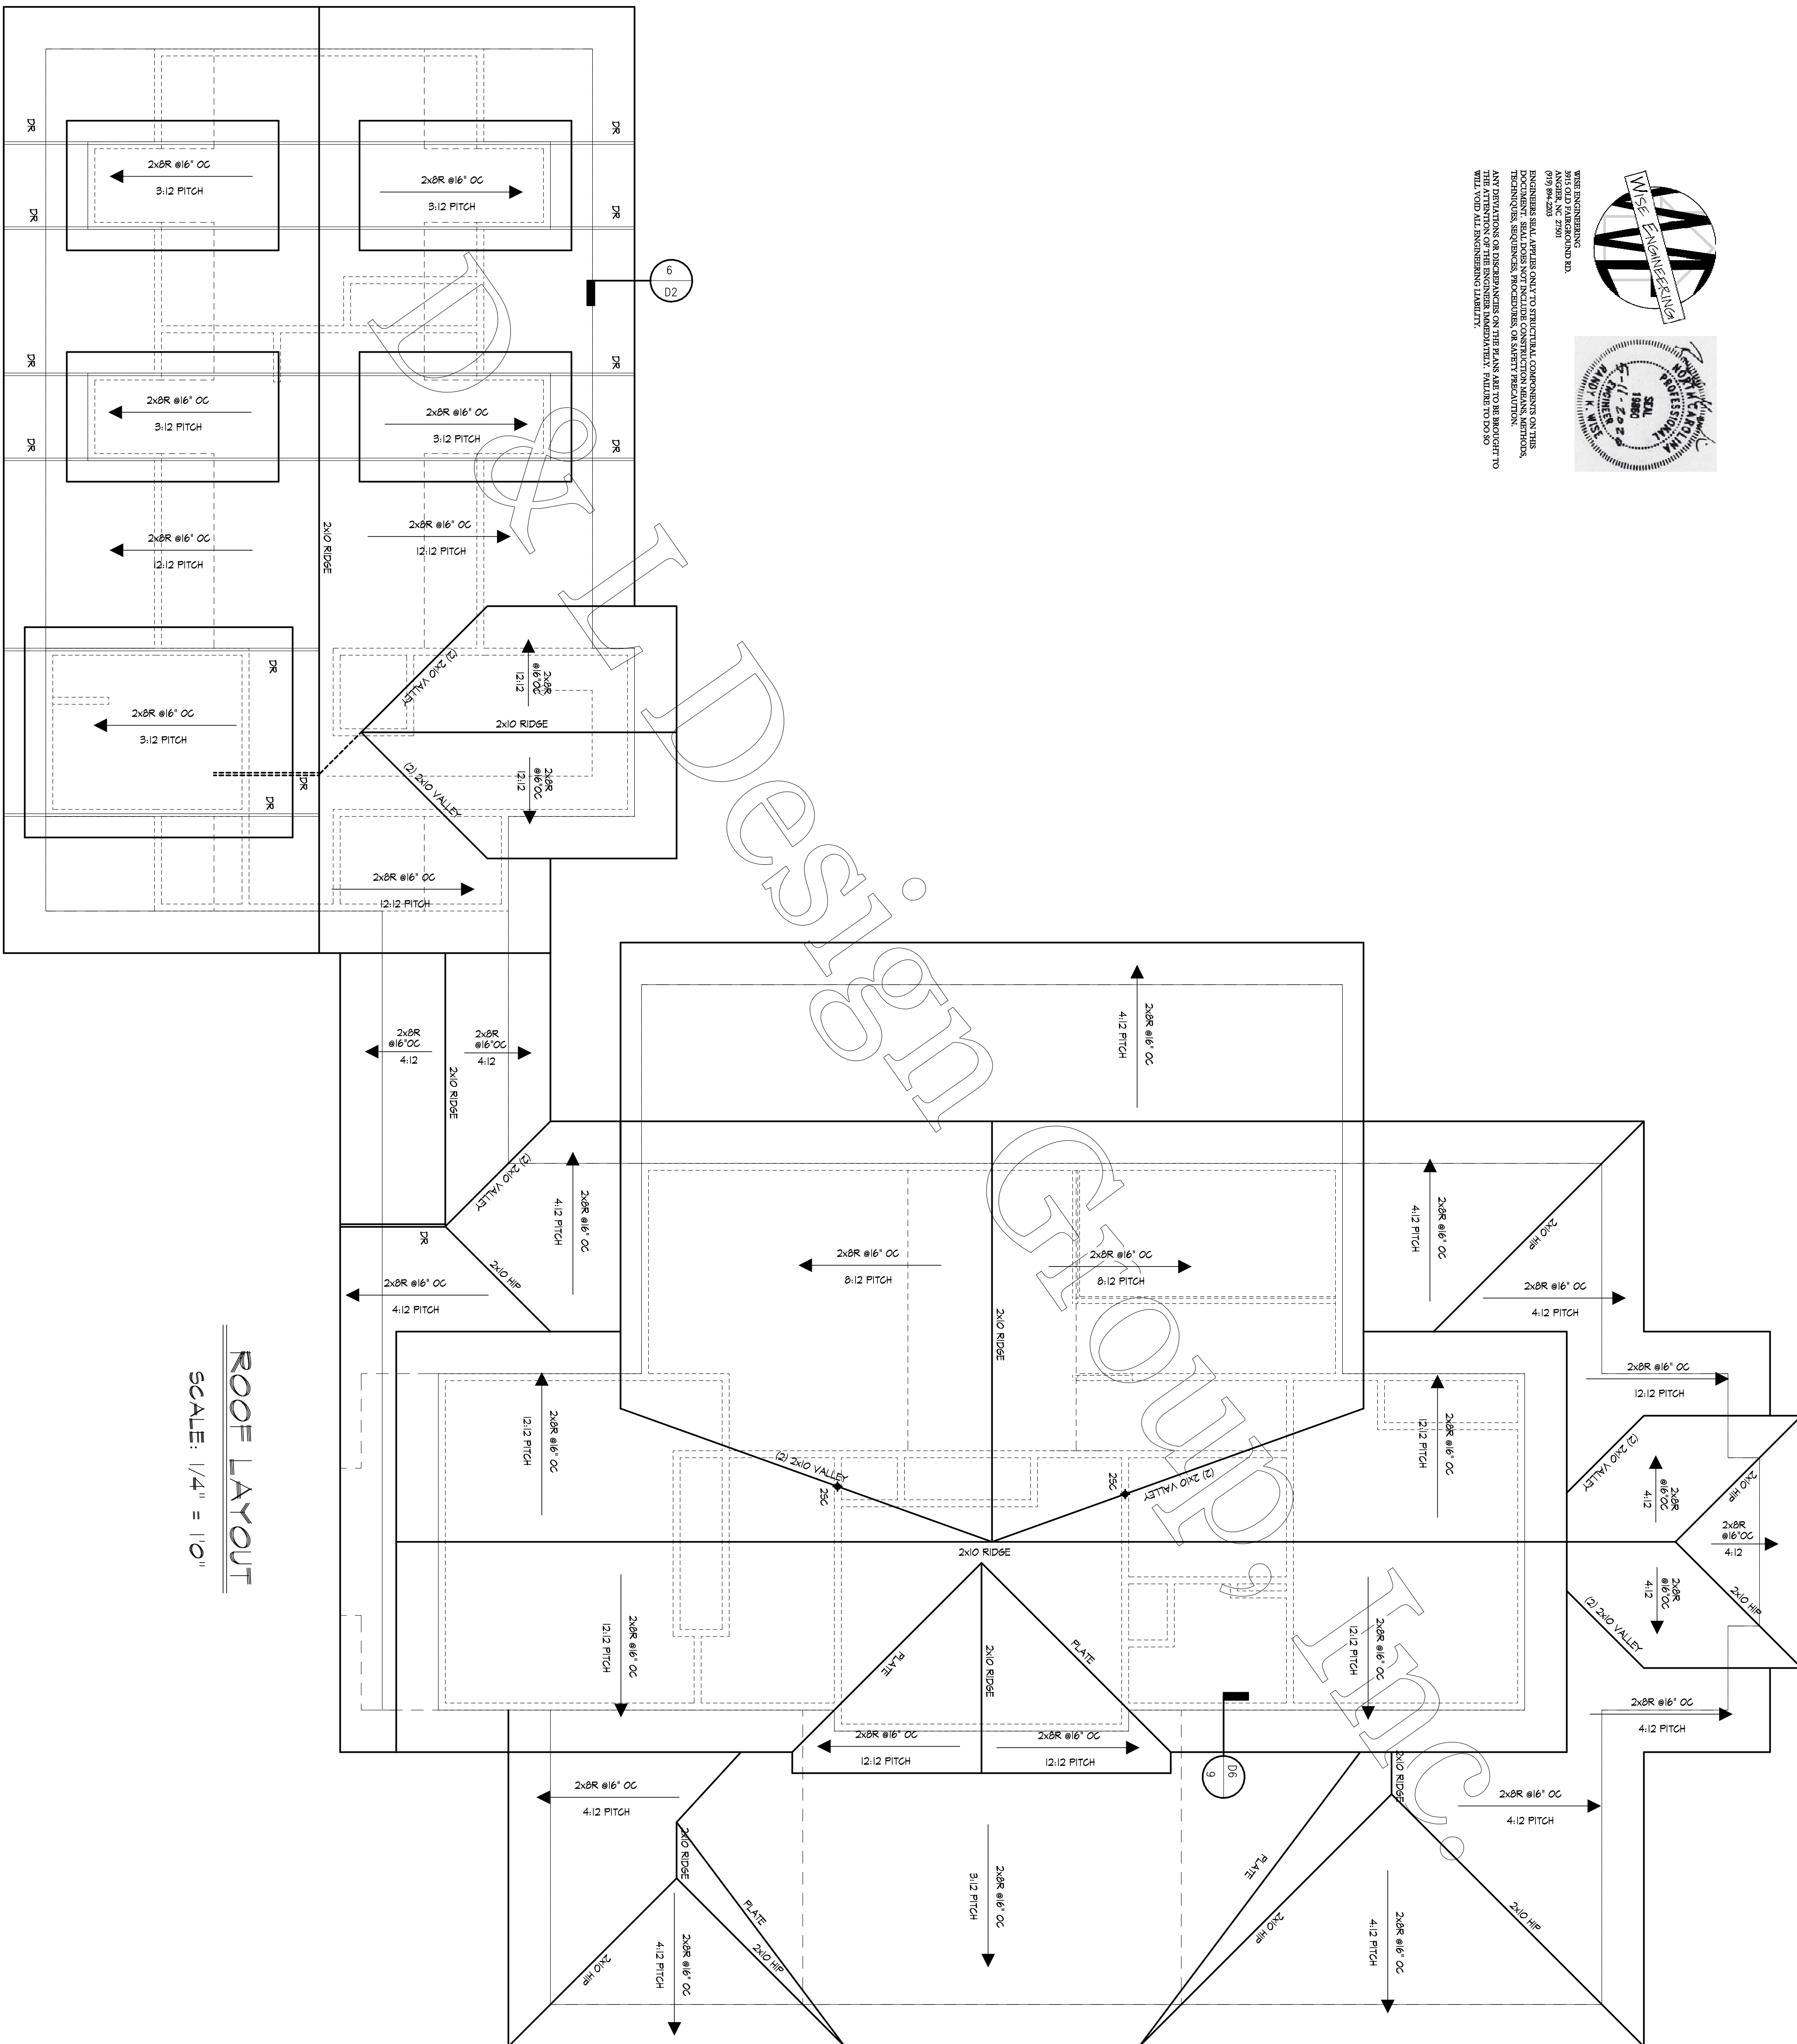

ROOF LAYOUT
 SCALE: 1/4" = 1'0"

It is the sole responsibility of the contractor and/or builder to determine whether these plans conform to all standards, provisions, requirements, methods of construction, and structures provided by applicable building codes, any other local agencies, and in accordance with good engineering and construction practice. D & L Design Group, Inc. does not assume liability for any deviation or discrepancy in these plans. If a discrepancy is discovered, please contact D & L Design Group, Inc. before continuing work.

Notes:
 The plan conforms to:
 N.C. State Building Code
 Residential Code, 2018 edition

<p>D & L DESIGN GROUP, INC. <i>custom and stock home plans</i></p>	PO BOX 1162 CLAYTON, NC 27528 919-553-1966 dlsgroup.com	<p>HENDRICKS RESIDENCE</p>
	<p>Plan no.: DL3228-C</p>	

Date:	05/29/2018
Revisions:	5/5/2020
Index:	1. ELEVATIONS 2. FOUNDATION 3. FIRST FLOOR 4. SECOND FLOOR 5. 1ST FL. STRUCT 6. 2ND FL. STRUCT 7. ROOF LAYOUT D1. NOTES & DETAILS D2. DETAILS
Sheet:	1 OF 1

NOTES:
All building code section references are from the North Carolina State Building Code, Residential Code 2018 Edition. For construction in other states please consult your local building code.

- EXTERIOR WALLS**
- Exterior walls with a fire separation distance less than 3ft. Shall have not less than a one hour fire resistive rating with exposure from both sides. Projections shall not extend to a point closer than 2ft. from the line used to determine the fire separation distance.
- Openings shall not be permitted in exterior walls or door/drawings with a fire separator distance of less than 3ft. from the property line, measured perpendicular to the vertical plane of the wall.
- GLAZING FOR HAZARDOUS LOCATIONS**
- Tempered glass shall be permanently identified with a non-removable label visible when the unit is glazed.
- Heat strengthened and tempered spandrel glasses are exempt from permanent labeling but shall be labeled with a removable paper label by the manufacturer.
- All glazing for hazardous areas shall pass the test requirements of CPSC 16 - CFR Part 1201. See section 308.3 for exceptions.
- The following areas are considered hazardous locations for the purposes of glazing:
1. Glazing in side hinged doors except jalousies.
2. Glazing in fixed and sliding panels of sliding door assemblies and panels in sliding and bi-fold closet door assemblies.
3. Glazing in storm doors.
4. Glazing in doors and enclosures for hot tubs, whirlpools, saunas, steam rooms, bathtubs and showers. Glazing enclosing these compartments where the bottom exposed edge of the glazing is less than 60 inches measured vertically above any standing or walking surface.
5. Glazing, in an individual fixed or operable panel within the same plane as a door where the nearest vertical edge is within a 24 inch arc of the door in a closed position and the bottom edge is less than 60 inches above the floor or walking surface.
6. Glazing in an individual fixed or operable panel, other than those in locations described in items 4 and 5 above, that meets all of the following conditions:
- Exposed area of an individual pane of greater than 9 square feet.
- Bottom edge less than 18 inches above the floor. -Top edge greater than 36 inches above the floor.
- One or more walking surfaces within 36 inches horizontally of the glazing.
7. All glazing in callings regardless of an area or height above a walking surface. Included are structural baluster, panels and nonstructural in-fill panels.
8. Glazing in walls and fences enclosing indoor and outdoor swimming pools, hot tubs and spas where the bottom edge of the pool or spa side is less than 60 inches above a walking surface and within 60 inches horizontally of the water's edge. This shall apply to single glazing and all panes in multiple glazing.
- Glazing in walls enclosing stairway landings or within 60 inches of the top and bottom stairways in the direction of travel at within 60 inches above the walking surface.
See section 308.4 for exceptions.
- ATTACHED GARAGES**
- Openings and penetrations through the walls or ceilings separating the dwelling from the garage shall be in accordance with Sections R302.5.1 through R302.5.3.
- Openings from a private garage directly into a room used for sleeping purposes shall not be permitted.
- Other openings between the garage and residence shall be equipped with solid wood doors not less than 1-3/8 inches thick or 20 minute fire-rated doors.
- The garage shall be separated as required by table R302.6. Openings in garage walls shall comply with section R302.5. This provision does not apply to garage walls that are perpendicular to the adjacent dwelling unit wall.

Separation	Dwelling/Garage Separation	Material
From the residence and attics	Table R302.6	Not less than 1/2-inch gypsum board or equivalent applied to the garage side
From attached rooms above the garage		Not less than 5/8-inch Type X gypsum board or equivalent
Structure(s) supporting assemblies used for separation required by this section		Not less than 1/2-inch gypsum board or equivalent applied to the interior side of exterior walls that are within this area
Garages located less than 3 feet from a dwelling unit or the same lot		Not less than 1/2-inch gypsum board or equivalent applied to the interior side of exterior walls that are within this area

- The area of the floor used for parking of vehicles shall be sloped toward the main vehicle entry doorway or to a drain for the movement of liquids.
- UNDER STAIR PROTECTION**
- Enclosed accessible space under stairs shall have walls, under stair surface and any shafts protected on the enclosed side with 1/2 inch gypsum board.
- HANDRAILS**
- Win. height: 34 inches. Max. height: 38 inches.
- Handrails to be provided on at least one side of stairways of four or more steps. Handrails shall be continuous the full length of stairs. (See section R311.7.8.2.2018 NCRC for exceptions)
- Spiral stairs to have handrails on outside radius.
- GUARDRAILS**
- Porches, balconies or raised floor surfaces located more than 30 inches above the floor or finished grade below shall have guardrails not less than 36 inches in height.
- Open sides of stairs with a total rise of more than 30 inches above the floor or grade below shall have guardrails not less than 30 inches in height measured vertically from the nosing of the treads.
- Required guardrails shall have intermediate rails or ornamental doublers that do not allow passage of an object 4 inches or

- Horizontal spacing between the vertical members in required guardrails shall be a maximum of 4 inches between members.
- SMOKE DETECTORS**
- Smoke detectors shall be installed in accordance with Section R314.
- CARBON MONOXIDE ALARMS**
- Carbon monoxide alarms shall be installed in accordance with Section R315.
- FOUNDATIONS**
- Provide a crawl space access of minimum 22in height x 30in width, located at best place due to grade.
- The surface area adjacent to the foundation should provide adequate drainage to drain surface water from foundation walls. Foundation walls should be drained and damp proofed in accordance with Sections 405 and 406.
- A minimum 6-mil (0.15 mm) polyethylene vapor retarder or equivalent shall be installed to nominally cover all exposed earth in the crawl space with joints lapped not less than 12 inches (305 mm). Where there is no evidence that the ground water table can rise to within 6 inches (152 mm) of the floor of the crawl space it is acceptable to puncture the ground vapor retarder at low spots to prevent water puddles from forming on top of the vapor retarder due to condensation. Install a drain to daylight or sump pump at each low spot. Crawl space drains shall be kept separate from roof gutter drain systems and foundation perimeter drains.
- Foundation Anchorage: In all cases at minimum, the wood sole plate at exterior walls on masonry slabs and wood sill plates shall be anchored to the foundation with 1/2" anchor bolts at 6'-0" C.C. max. and within 12" of the ends of each plate section. Minimum embedment is 7".


- FLASHING**
- Approved consist of a resistant flashing shall be provided in the following areas:
• At the top of all exterior window and door openings.
• At the intersection of masonry construction with frame or masonry walls.
• Under and at the ends of masonry, wood or metal copings and sills.
• Continuously above all projecting wood trim.
• Where exterior porches, decks or stairs attach to a wall or floor assembly of wood frame construction.
• Under built gutters.
• At junction of chimneys and roofs.
• In all roof valleys and around all roof openings.
- ROOF DRAINAGE**
- All gutters and downspouts shall discharge at least 5 feet away from foundation walls or into an approved drainage system.
- ROOF FRAMING**
- Rafters shall be nailed to ceiling joists where joists are parallel to rafters.
- When joists are perpendicular to rafters, provide a rafter tie located as near the plate as possible, spaced not more than 48" O.C.
- ATTIC ACCESS**
- Minimum 22" x 30" attic access to be provided to any attic with a clear height of 30".
- Exceptions: concealed areas not located over main structure including porches, knee walls less than 5ft. In height, dormers, bay windows, etc.
- ENERGY CONSERVATION REQUIREMENTS**
- Refer to Chapter 11 of the NC Residential Building Code for all energy conservation requirements.
- WALL AND ROOF CLADDING**
- Wall cladding to be designed for a 25lb per sq. ft. or greater positive or negative pressure for houses with a mean roof height of 35ft. or less.
- HIGH WIND ZONE 5 AND WIND BORNE DEBRIS REGIONS**
- Unless noted otherwise, this plan is not designed for construction in High Wind Zone or Wind Borne Debris regions. Please consult applicable building codes for additional structural requirements for building in High Wind Zones and Wind Borne Debris regions.
- ROOF SLOPES FROM 2:12 - 4:12**
- Install 2 layers of 15# felt paper.
- RETAINING WALL**
- An engineered design is required for retaining walls that are subject to hydrostatic pressure from ground water, and that support more than 48" of unbalanced backfill and do not have permanent lateral support at the top and bottom.
- MANUFACTURED FIREPLACES**
- Refer to manufacturer's specifications and details for installation.

- WOOD DECKS**
- Girders shall bear directly on posts or be connected to the side of posts with D 5/8" hot dipped galvanized bolts.
- Floor decking shall be NO. 2 grade SFG or equivalent.
- Minimum floor decking thickness:

JOIST SPACING	DECKING MATERIAL
12" o.c.	T & S
16" o.c.	T 1 & G
24" o.c.	1-1/4" S&S
32" o.c.	2" S&S
- WOOD DECKS**
- Maximum height of deck support posts:
- 4x4 posts, 8'-0" unbraced
- 6x6 posts, 20'-0" unbraced
- based on No. 2 heeled Southern Pine posts.
- Post height is measured from top of footing to bottom of post.
- Decks with post heights over 20' shall be designed and sealed by a professional engineer.
- Decks shall be braced to provide lateral stability according to Item 8, Appendix M of building code.

- ATTACHMENT SCHEDULES**
All structures except deck veneer structures:

Fasteners	6" Max. Jolt	6" Max. Jolt
5/8" Hot Dipped Galvanized Bolts With Washers	1 @ 9'-6" o.c.	1 @ 9'-6" o.c.
AND	AND	AND
D20 Common Hot Dipped Galvanized Nails	2 @ 8" o.c.	3 @ 6" o.c.
- Deck attachment for joists is 2'-1/2 inches
*Nails must penetrate the supporting structure band a minimum of 1'-1/2 inches

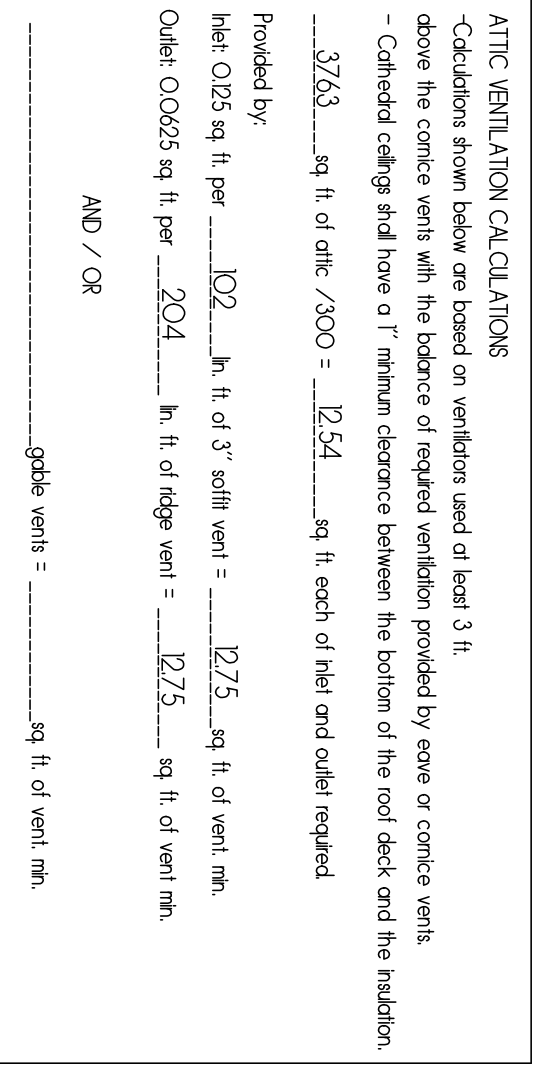


ATTIC VENTILATION CALCULATIONS
Calculations shown below are based on rafters used at least 3 ft. above the cornice with the balance of required ventilation provided by soffit or cornice vents.
- Confirmed ceiling and floor of 1" minimum clearance between the bottom of the roof deck and the insulation.
- 32x40 sq ft. of attic / 7000 = 0.045 sq ft. each of their end outlet required.
Provided by:

their O25 sq ft. per	0.02	in. ft. of soffit vent =	0.275	sq ft. of vent in.
their O20x25 sq ft. per	0.04	in. ft. of ridge vent =	0.275	sq ft. of vent in.

CRACK SPACE VENTILATION CALCULATIONS FOR WALL VENTED CRACK SPACES - HOUSE
6 in polyethylene vapor retarder or equivalent to be installed to cover all exposed rafters in the crack space with joints applied not less than 12 inches apart to puncture the vapor retarder of the crack space.
- Provide NO. 20 galvanized galvanized nails, 6 inches long, spaced 6 inches apart in the crack space.
- Soffits: Use construction fasteners that drive into one or more bay spots. Install a brace to support or snap joints of each bay spot. Separate them from other deck systems.
- One foundation vent should be installed with 2' of each corner of the building.
- Wall vented crack spaces shall be separated from adjoining basements, porches and garages by permanent solid and surface with utility penetrations through the separating wall sealed. Latched, weather - stripped doors and panels shall provide access between the crack space and such adjoining spaces.

20x29 sq ft. of crack space / 750 =	0.027	sq ft. of required ventilation.		
Provided by:	33	8"x6" vents at O45 sq ft. net free ventilation each =	1455	sq ft. of ventilation.
28x33 sq ft. of crack space / 750 =	0.037	sq ft. of required ventilation.		
Provided by:	5	8"x6" vents at O45 sq ft. net free ventilation each =	225	sq ft. of ventilation.

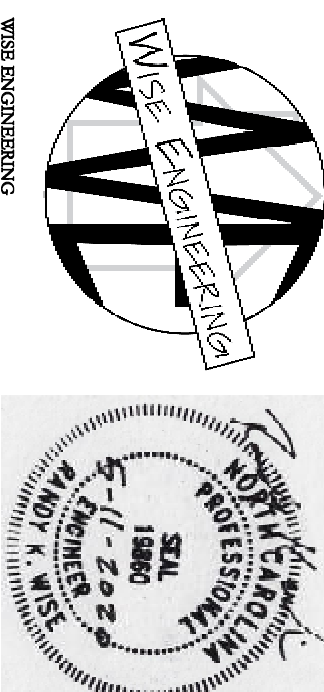


WISE ENGINEERING, INC.
1000 W. WILSON ST. SUITE 200
ASHEBORO, NC 27811
919-292-8888
www.wise-engineering.com

INSULATION AND FENESTRATION REQUIREMENTS BY COMPONENT
TABLE M1102.1.2(R402.1.2)

CLIMATE ZONE	FENESTRATION U-FACTOR	SHGC*	GLAZED CEILING U-FACTOR	WOOD FRAME WALL R-VALUE	MASS WALL R-VALUE	FLOOR R-VALUE	BASEMENT WALL R-VALUE	SLAB R-VALUE	CRACK SPACE SPEC. WALL R-VALUE
3	0.35	0.55	0.30	30.0	15 or 13-2.5* or 21.0a	5/13	19	5/13 ^b	0
4	0.35	0.55	0.30	30.0	15 or 13-2.5* or 21.0a	5/13	19	5/13 ^b	10
5	0.35	0.55	NR	30.0	15 or 13-2.5* or 21.0a	3/9 ^c	10/15	10/15	10


FIG. S1.1: Foot = 304.8 mm.
a. Rafters are minimum U-factors and SHGC are maximums. When insulation is installed in a cavity, which is less than the listed or design thickness of the insulation, the installed R-value of the insulation shall not be less than the R-value specified in the table.
b. The fenestration U-factor column excludes skylights. The SHGC column applies to all glazed fenestration.
c. 100/15 means R-10 continuous insulated sheathing on the interior or exterior of the home or R-15 cavity insulation at the interior of the basement wall or crawl space wall.
d. R-5 shall be added to the required slab edge Rafters for heated slabs. For nonheated slabs, insulation shall be applied from the inspection gap downward to the bottom of the footing or a minimum of 24 inches below grade, whichever is less. For heated slabs, insulation shall extend to the bottom of the foundation wall or 24 inches, whichever is less. (See Appendix D.)
e. Decked.
f. Basement wall insulation is not required in warm/humid locations as defined by Figure M1101.2 and Table M1101.2.
g. Or insulation surfaced to the framing cavity, R-5 minimum.
h. The first value is cavity insulation, the second value is continuous insulation, so 13-5 means R-13 cavity insulation plus R-5 continuous insulation. Structural sheathing covers 25 percent or less of the sheath, insulating sheathing is not required where structural sheathing is used. If structural sheathing covers more than 25 percent of exterior structural sheathing shall be supplemented with insulated sheathing of least R2.
i. The second R-value applies when more than half the insulation is on the interior of the mass wall.
j. In addition to the exception in Section M102.3.3, a maximum of two glazed fenestration product assemblies having a U-factor no greater than 0.35 shall be permitted to be substituted for minimum code compliant fenestration product assemblies without penalty.
k. In addition to the exception in Section M102.3.3, a maximum of two glazed fenestration product assemblies having a U-factor no greater than 0.70 shall be permitted to be substituted for minimum code compliant fenestration product assemblies without penalty.
l. R-3 shall be deemed to satisfy the cavity insulation requirement, wherever the full height of uncompressed R-30 insulation extends over the wall top plate at the eaves. Otherwise R-30 insulation is required where adequate clearance exists or insulation must extend to either the insulation plate or within 1 inch of the attic roof deck.
m. Table value required except for roof edge where the space is limited by the pitch of the roof; there the insulation must fill the space up to the eave.
n. R-19 fiberglass batts compressed and installed in a nominal 2 x 6 framing cavity is deemed to comply. Fiberglass batts rated R-19 or higher compressed and installed in a 2 x 4 wall is not deemed to comply.
o. Basement wall meeting the minimum mass wall specific heat content requirement may use the mass R-value as the min. requirement.

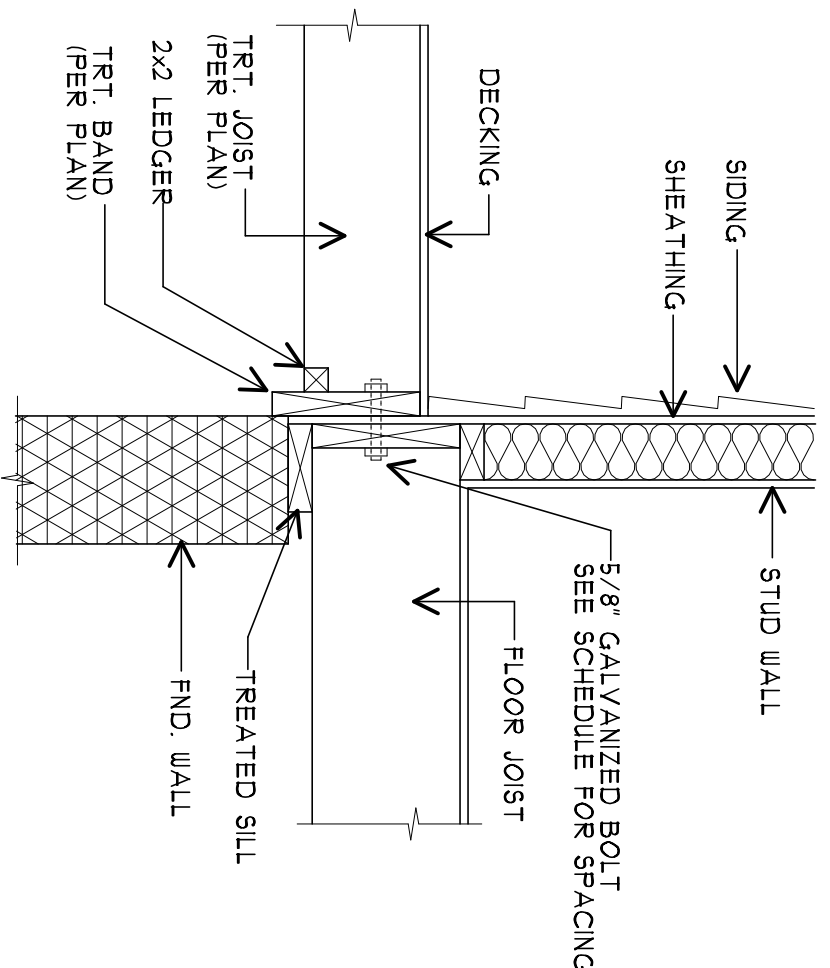


DECK ATTACHMENT
SCALE: 1"=1'-0"

<p>Notes: The plan conforms to N.C. State Building Code, Residential Code, 2018 Edition.</p>	<p>HENDRICKS RESIDENCE</p>	<p>PO BOX 1162 CLAYTON, NC 27528</p>	<p>919-553-1966 dldesigngroup.com</p>
	<p>Plan no.: DL3228-C</p>	<p>D&L DESIGN GROUP, INC. custom and stock home plans</p>	
<p>Date: 05/29/2018 Revisions: 5/5/2020</p>	<p>Index: 1. ELEVATIONS 2. FOUNDATION 3. FIRST FLOOR 4. SECOND FLOOR 5. IS PL STRUCT 6. 2ND FL STRUCT 7. ROOF LAYOUT D. NOTES & DETAILS D2. DETAILS</p>	<p>NOTES & DETAILS</p>	<p>Sheet: D1 OF 2</p>


THIS HOME DESIGN IS PROTECTED BY FEDERAL COPYRIGHT LAWS. BY YOUR PURCHASE OF THIS PLAN FROM D&L DESIGN GROUP, INC YOU ARE GRANTED A LIMITED USAGE LICENSE TO CONSTRUCT ONE HOME OF THIS DESIGN. LICENSE IS GRANTED TO ORIGINAL PURCHASER ONLY. PURCHASER MAY NOT SELL OR GIVE THIS DESIGN TO ANY OTHER ENTITY. LICENSEE SHALL INDEMNIFY AND HOLD HARMLESS D&L DESIGN GROUP, INC FROM AND AGAINST ALL CLAIMS, DAMAGES, LOSSES AND EXPENSES, INCLUDING REASONABLE ATTORNEY'S FEES, ARISING FROM OR OUT OF THE USE OF THIS DESIGN. WITHOUT FURTHER NOTICE D&L DESIGN GROUP, INC WILL PROSECUTE TO THE FULLEST ALLOWED BY LAW. UNAUTHORIZED USE OF THIS DESIGN SHALL CONSTITUTE INTENTIONAL INFRINGEMENT AND VIOLATION OF THE COPYRIGHT. WITHOUT FURTHER NOTICE D&L DESIGN GROUP, INC WILL PROSECUTE TO THE FULLEST ALLOWED BY LAW.

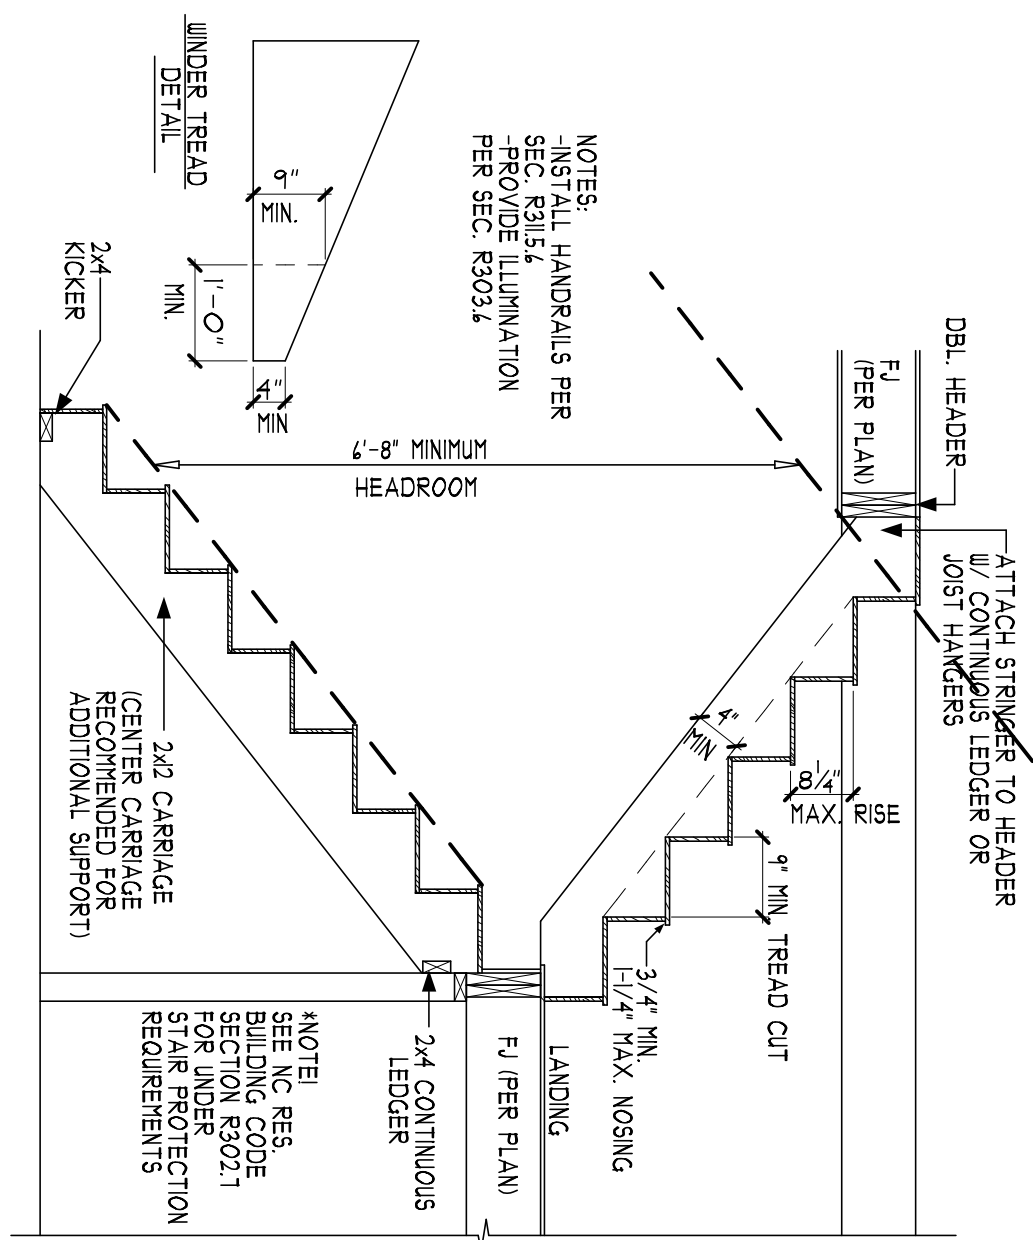


2 TYPICAL STAIR SECTION
SCALE: 1/2"=1'-0"

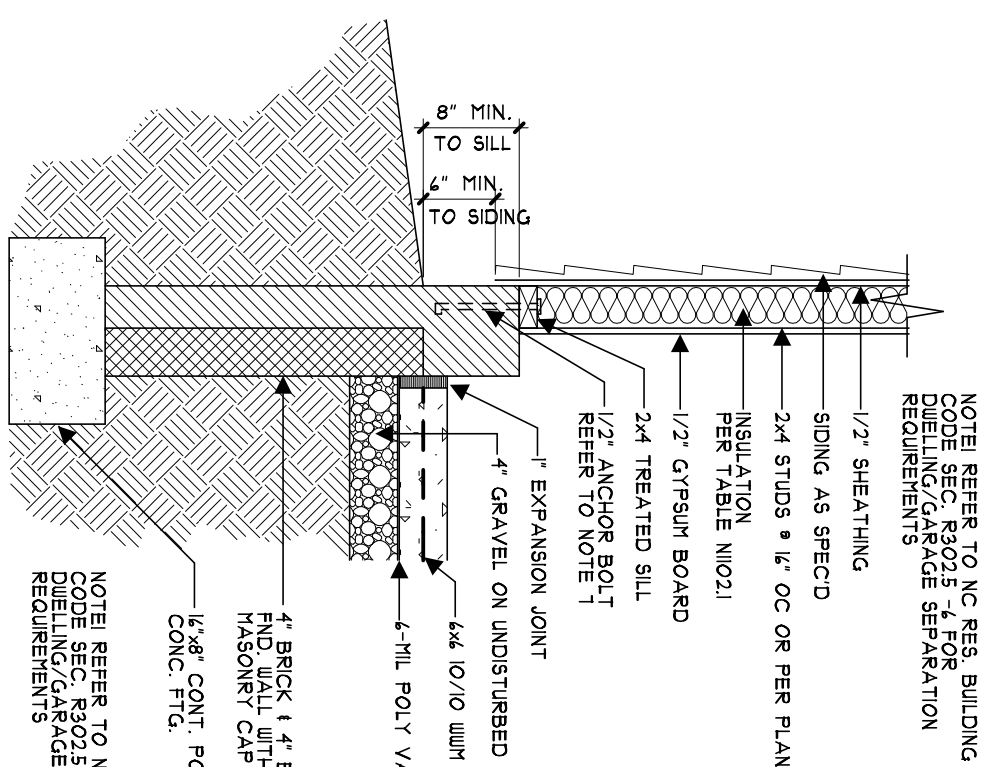


3 CONC. SLAB AT GARAGE FND. W/ SIDING
SCALE: 3/4"=1'-0"

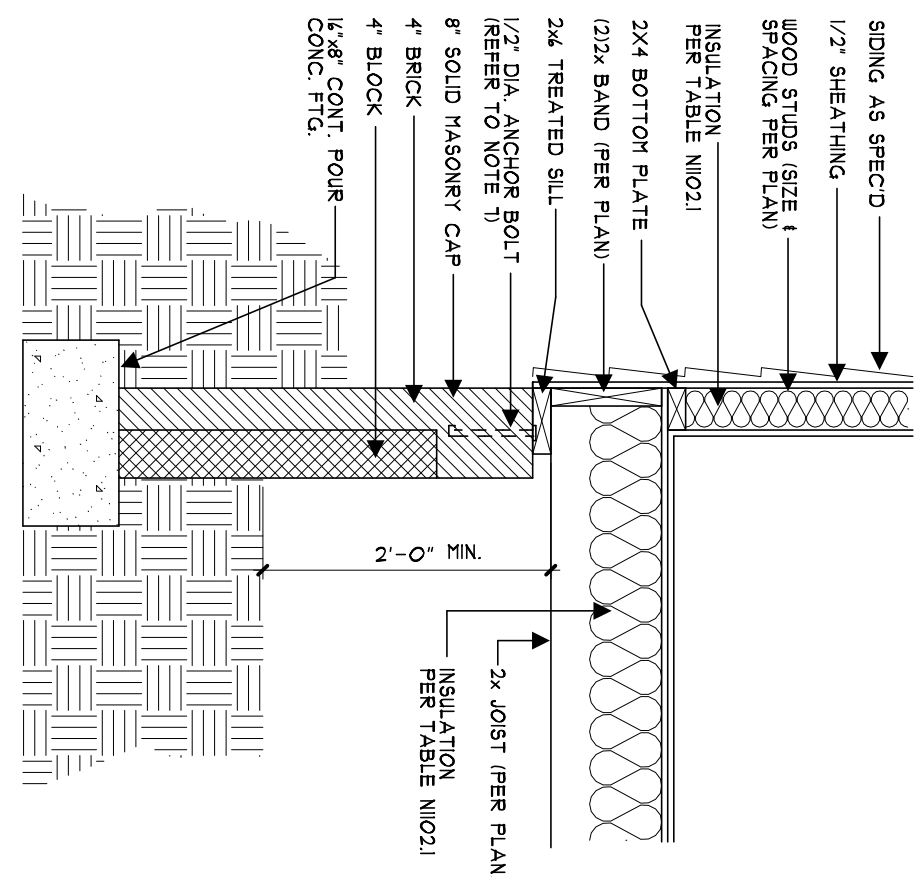


4 CRAWL SPACE WITH SIDING
SCALE: 3/4"=1'-0"

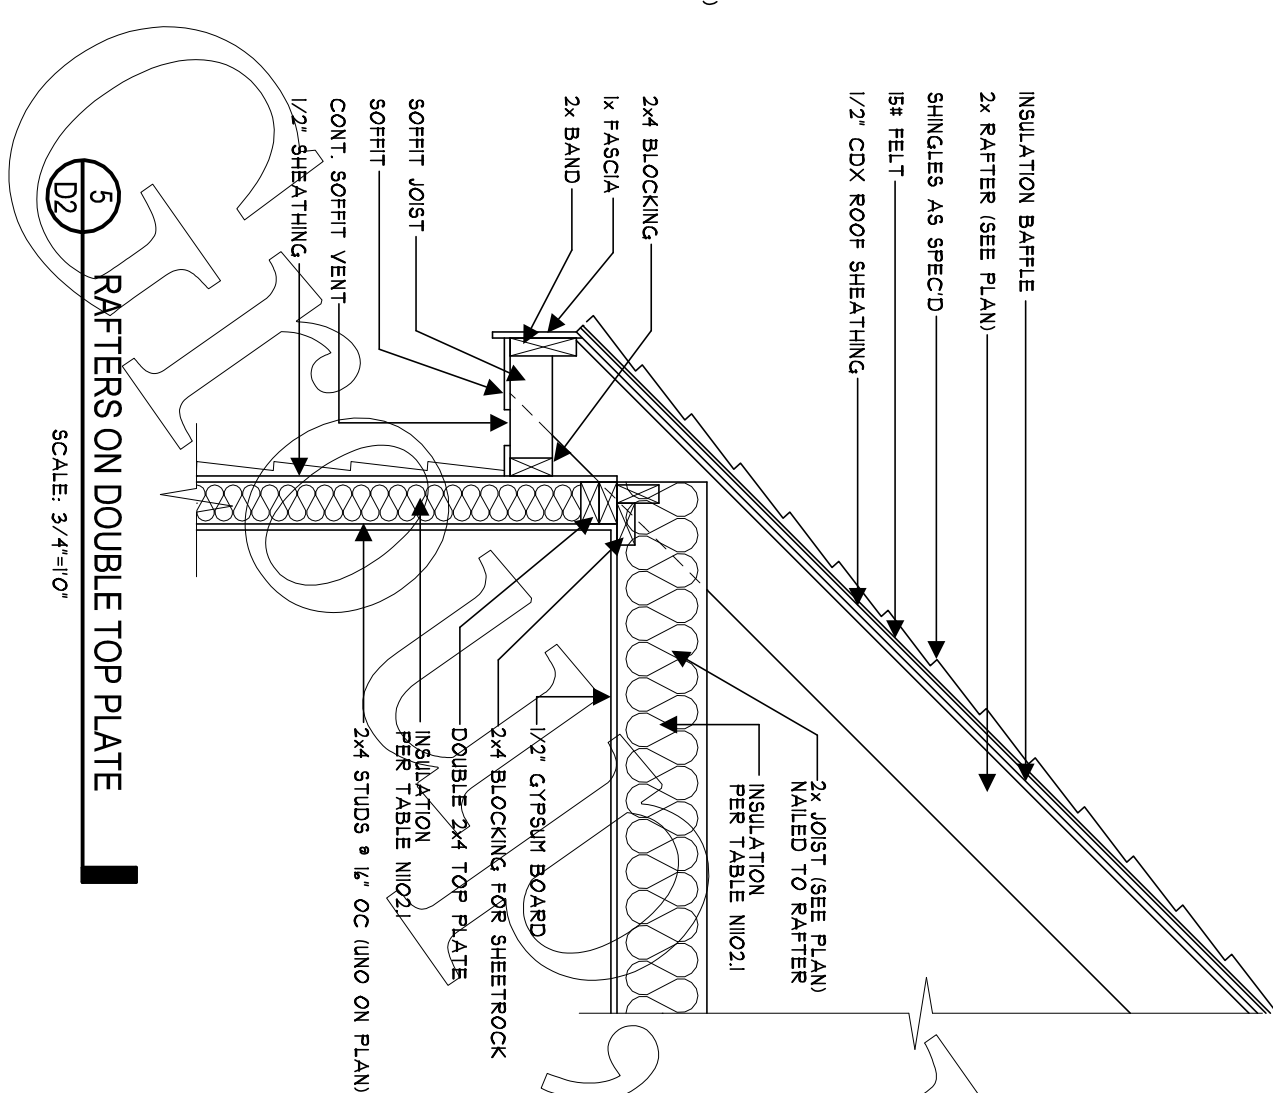


5 RAFTERS ON DOUBLE TOP PLATE
SCALE: 3/4"=1'-0"

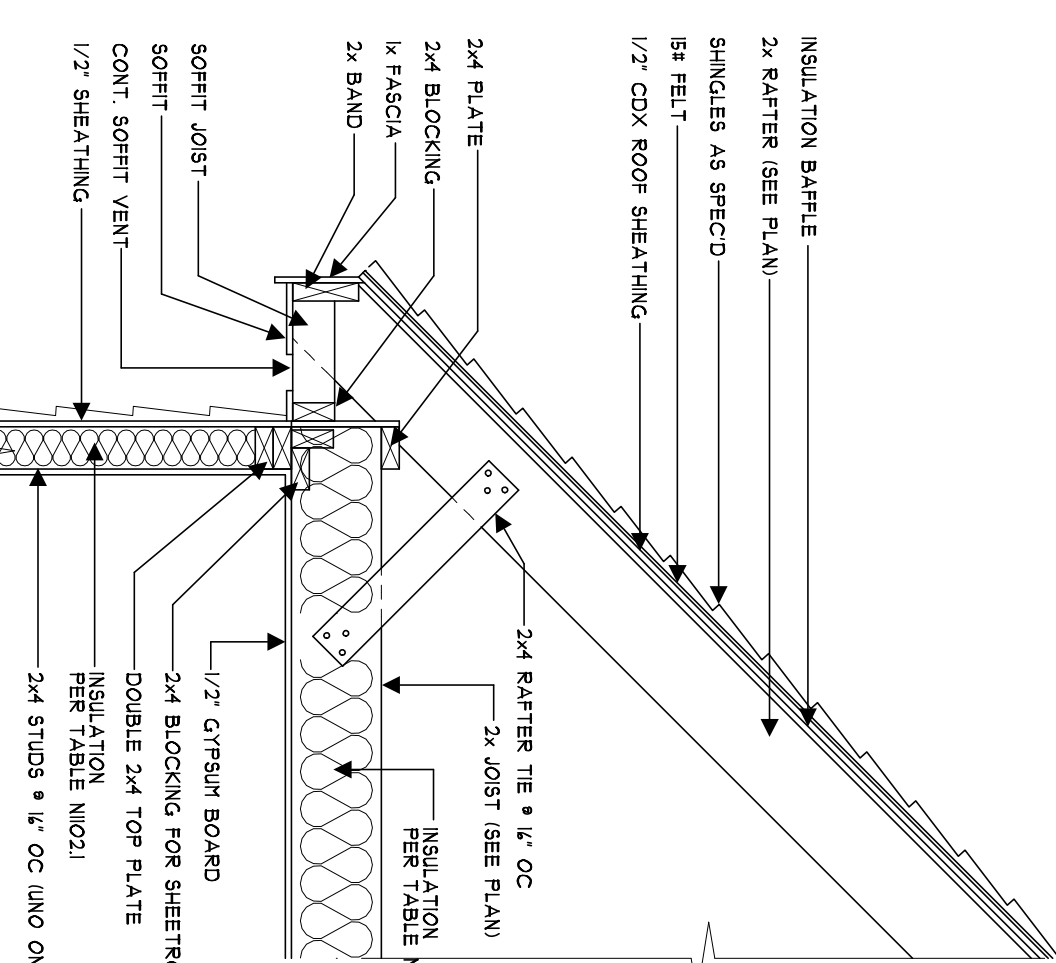


6 RAFTERS ON PLATE ON TOP OF JOISTS
SCALE: 3/4"=1'-0"

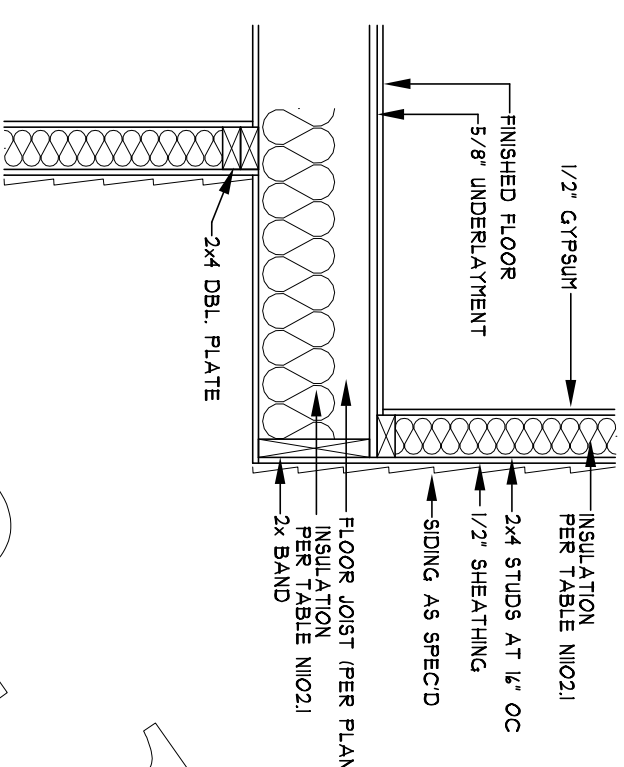


7 CANTILEVER OVER FLOOR BELOW
SCALE: 3/4"=1'-0"

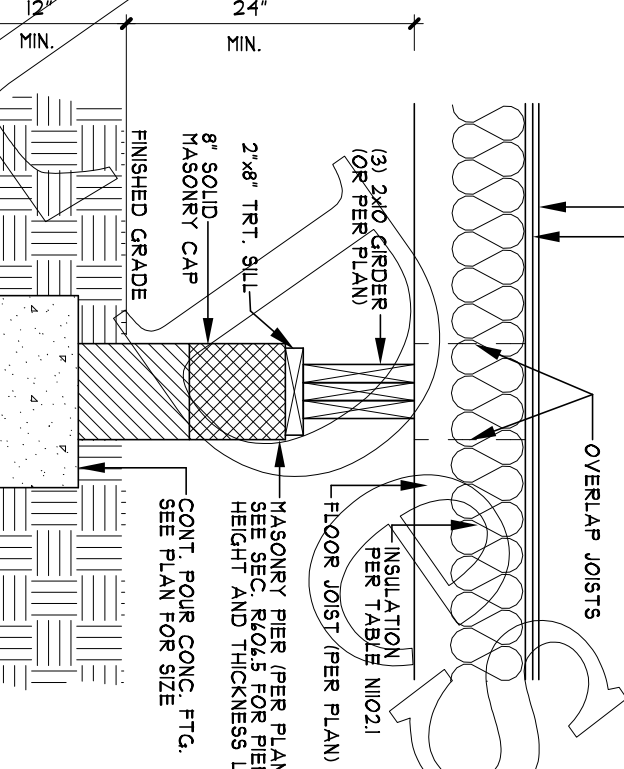


8 DROPPED GIRDER
SCALE: 3/4"=1'-0"

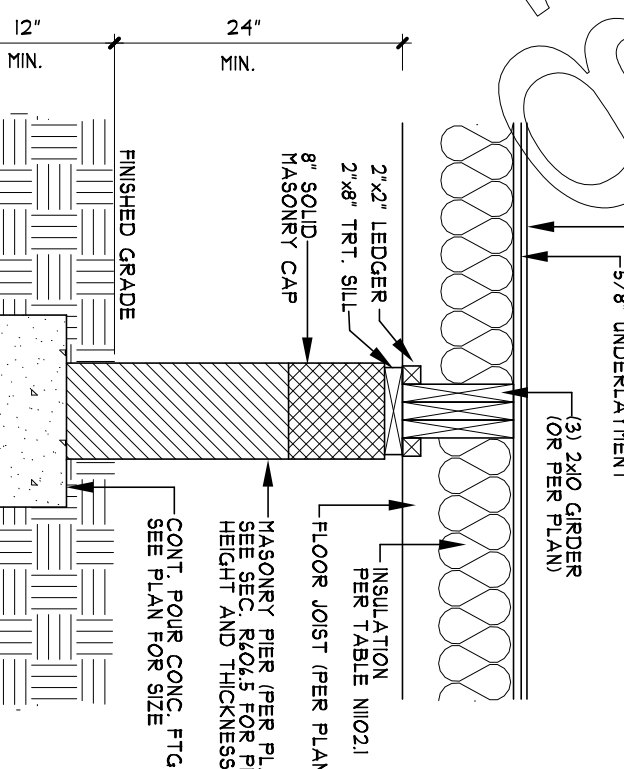

9 FLUSH GIRDER
SCALE: 3/4"=1'-0"

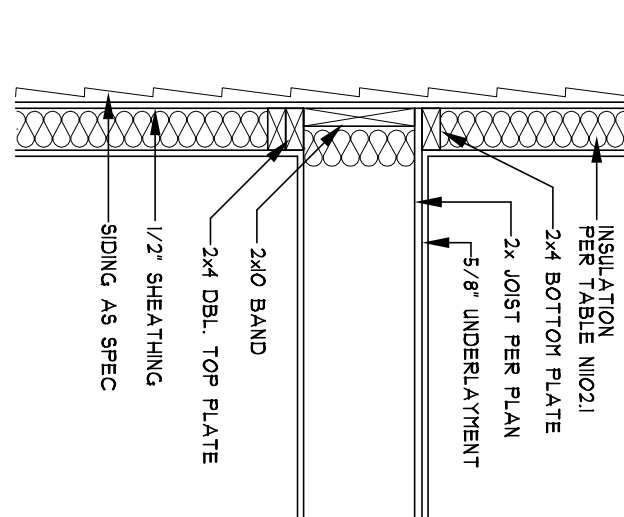


10 SECTION BETWEEN FLOORS
SCALE: 3/4"=1'-0"

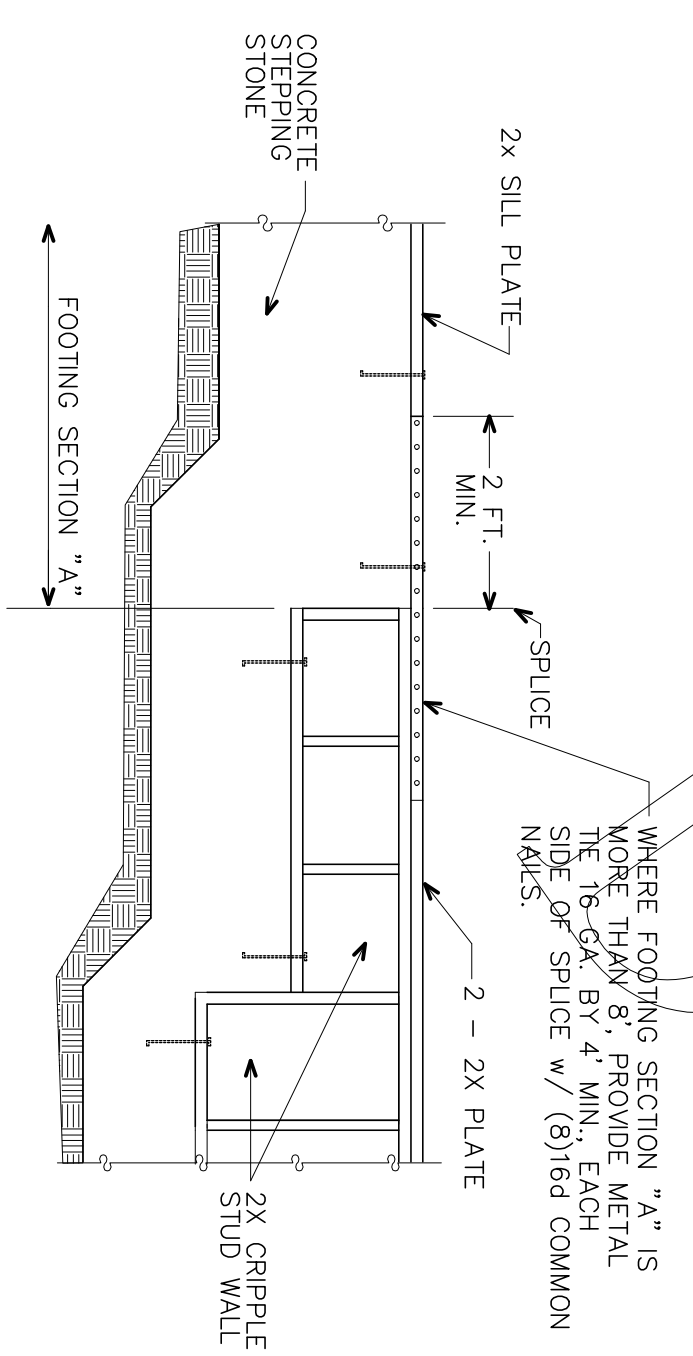


11 CRIPPLE WALL DETAIL
SCALE: 3/4"=1'-0"


NOTE: WHERE FOOTING SECTION "A" IS LESS THAN 8' LONG IN A 25' TOTAL LENGTH WALL, PROVIDE BRACING AT CRIPPLE STUD WALL.

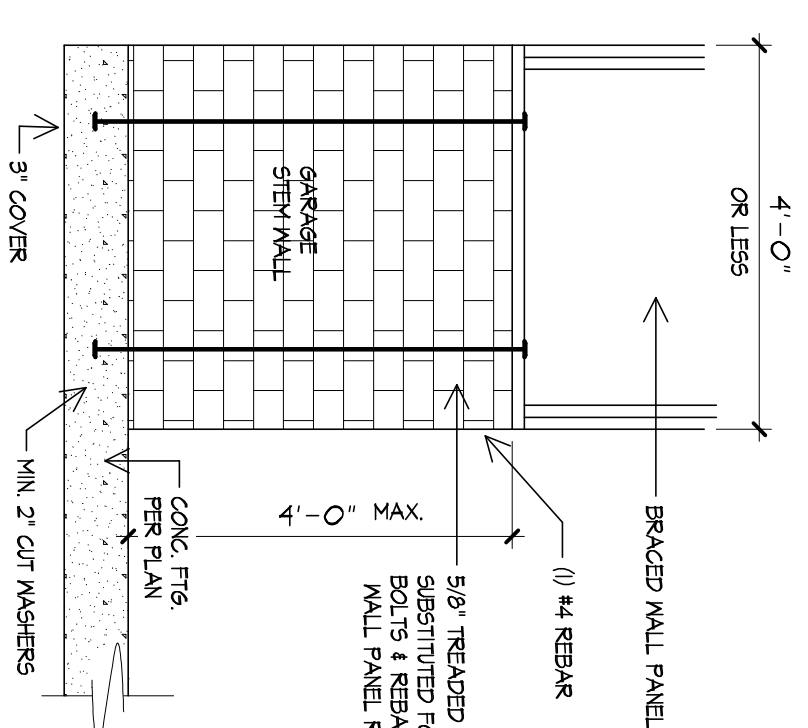

12 GARAGE STEM WALL REINFORCEMENT
SCALE: 3/4"=1'-0"

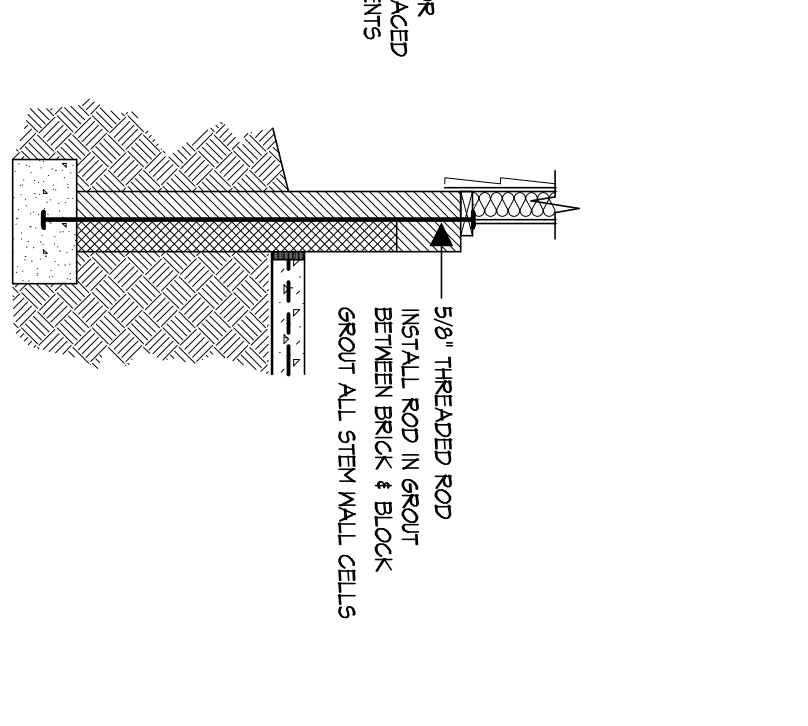

13 TOP BRICK & BLOCK STEM WALL SECTION
SCALE: 3/4"=1'-0"

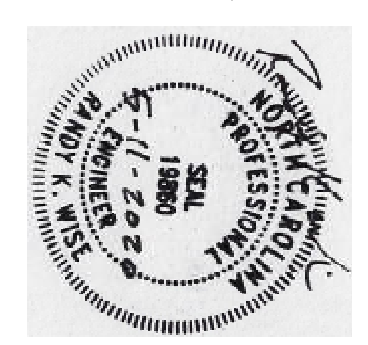




It is the sole responsibility of the contractor and/or builder to determine whether these plans conform to all standards, provisions, requirements, methods of construction, and structures provided by applicable building codes, any other local agencies, and in accordance with good engineering and construction practices. D & L Design Group, Inc. does not assume liability for any deviation or discrepancy in these plans. If a discrepancy is discovered, please contact D & L Design Group, Inc. before continuing work.

Notes:
This plan conforms to:
N.C. State Building Code
Residential Code, 2018 edition

HENDRICKS
RESIDENCE
Plan no.: DL3228-C

D&L
DESIGN GROUP, INC.
custom and stock home plans
PO BOX 1162
CLAYTON, NC
27528
919-553-1966
dldesigngroup.com


Date:	05/29/2018
Revisions:	5/5/2020
Index:	1. ELEVATIONS 2. FOUNDATION 3. FIRST FLOOR 4. SECOND FLOOR 5. 1ST FL. STRUCT 6. 2ND FL. STRUCT 7. ROOF LAYOUT 8. NOTES 9. DETAILS 10. DETAILS
Sheet:	D2 OF 2

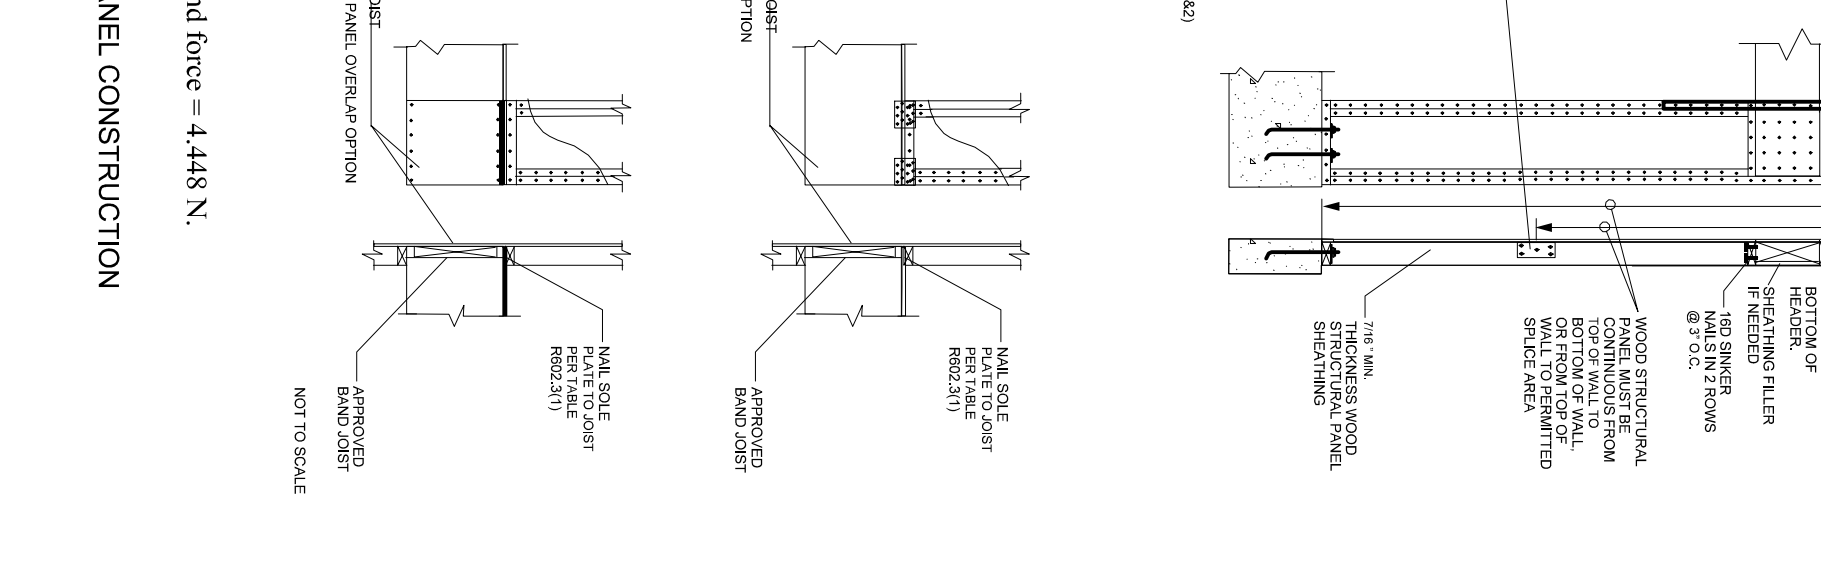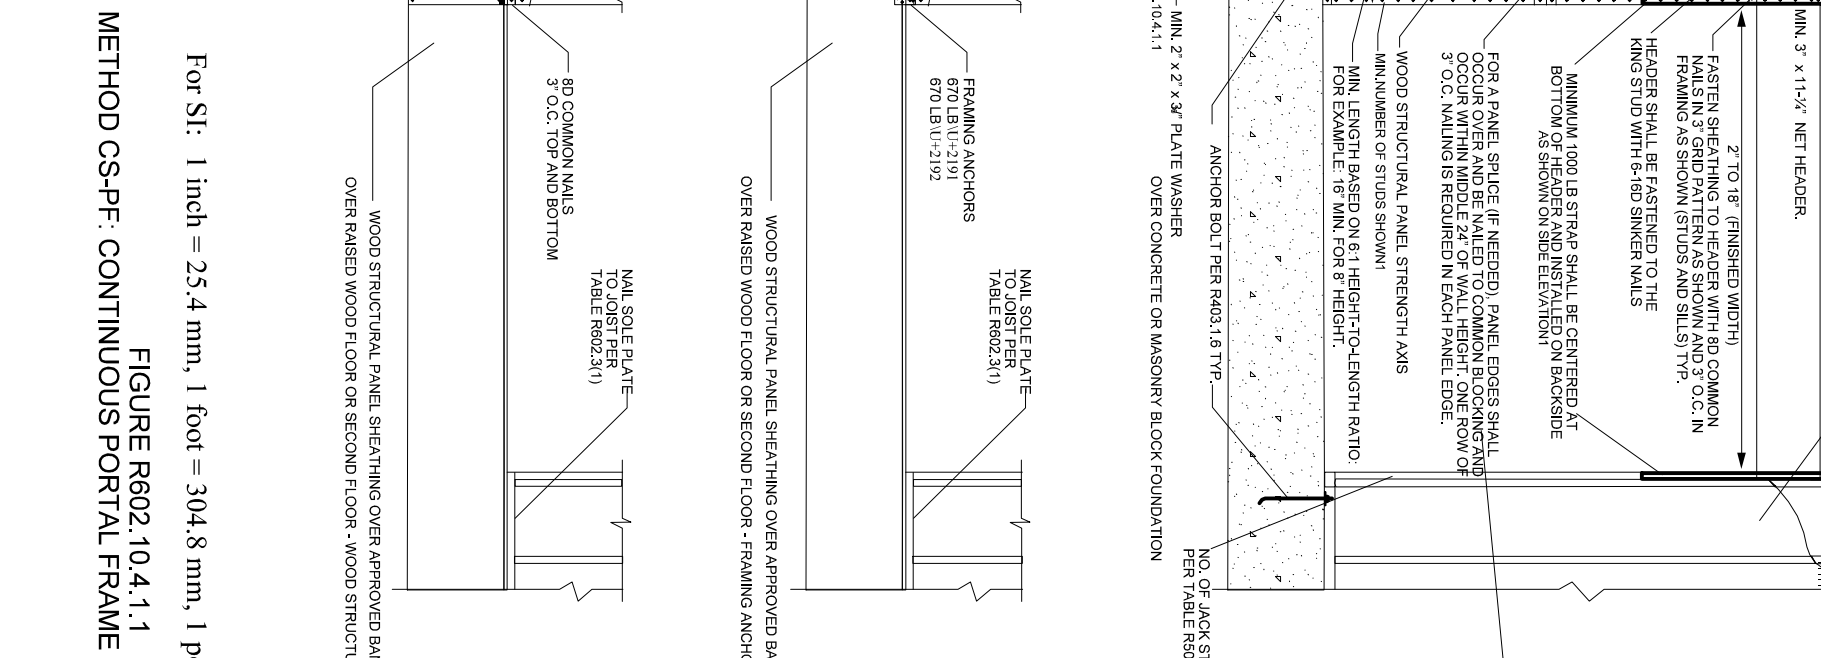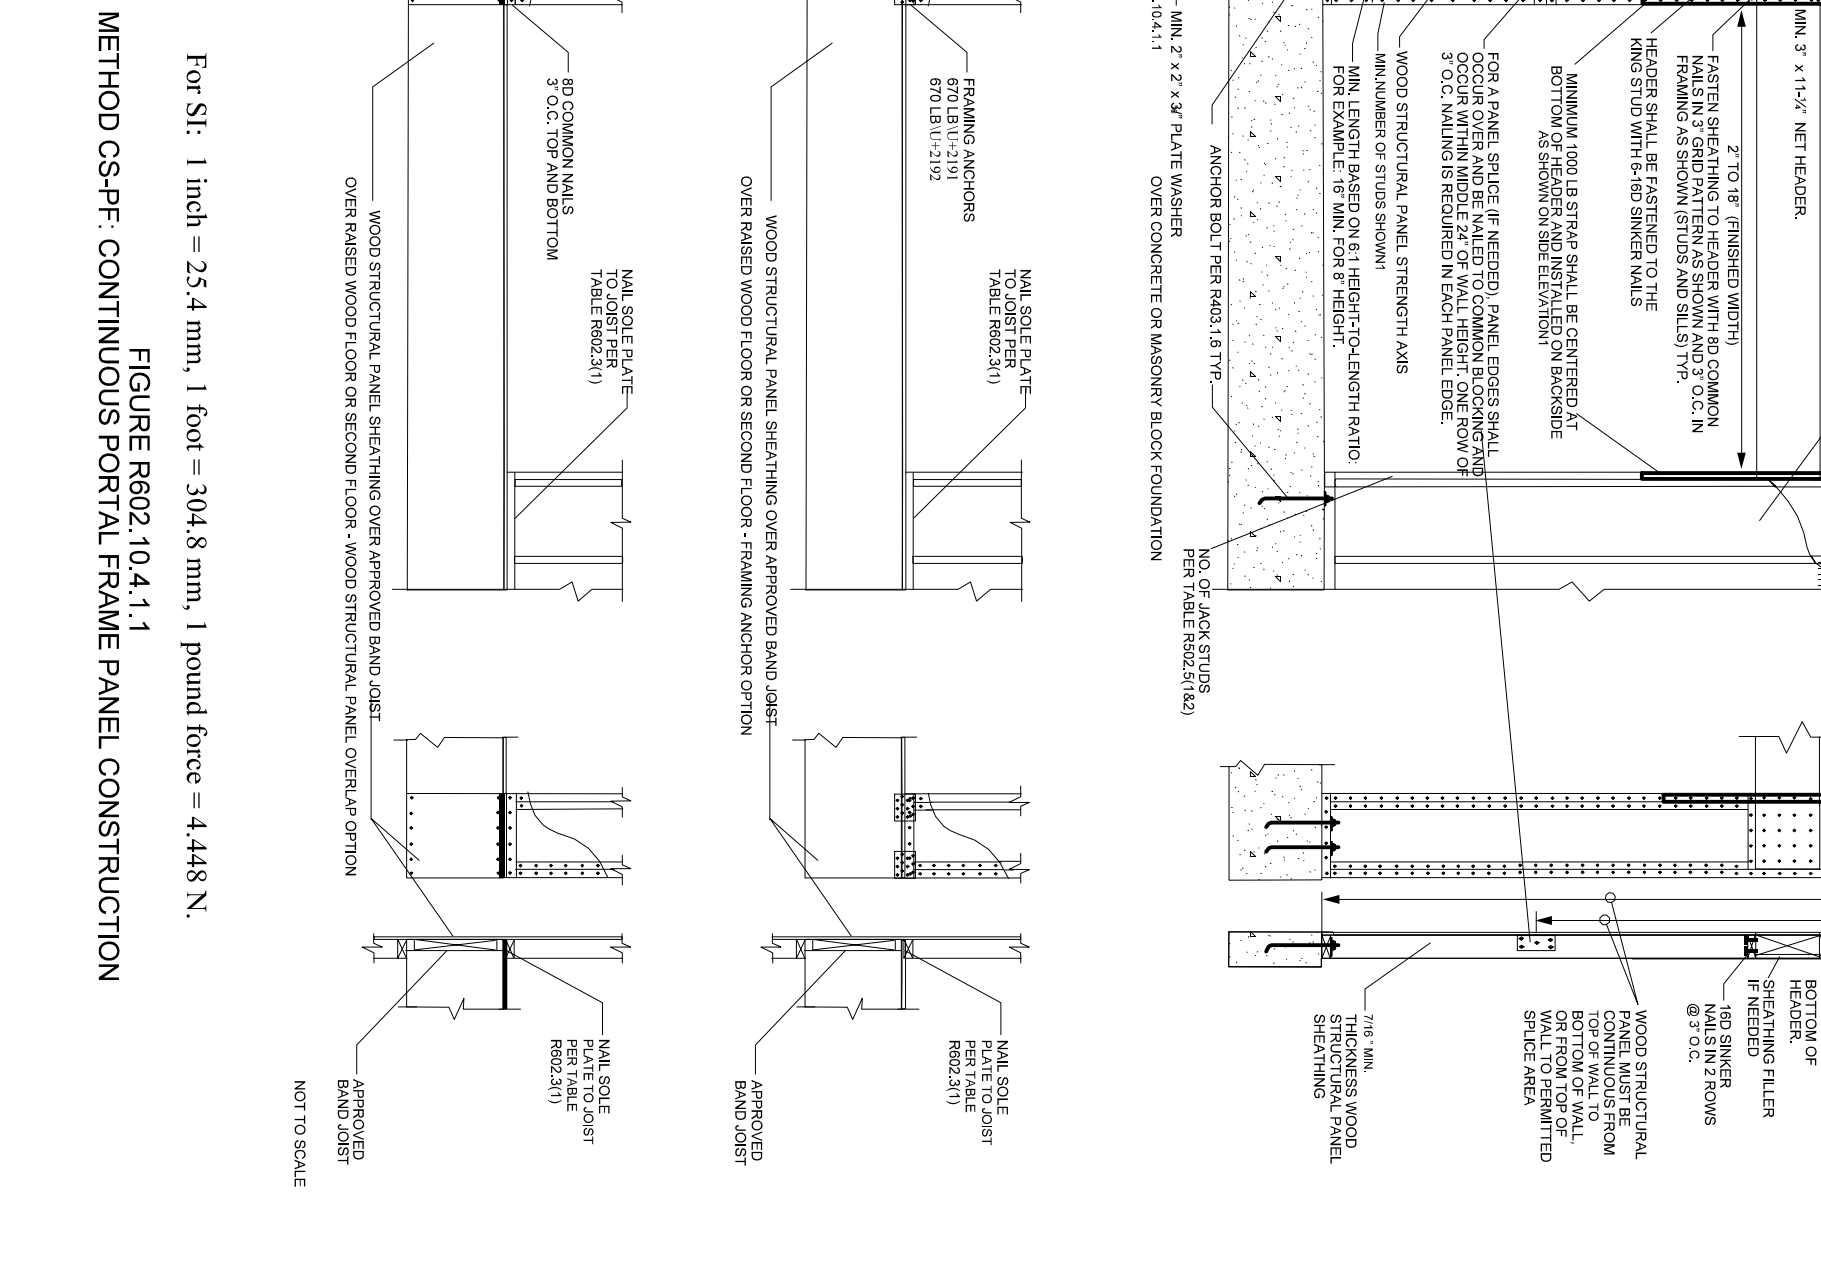

For SI: 1 inch = 25.4 mm, 1 foot = 304.8 mm, 1 pound force = 4.448 N.
METHOD CS-PF- CONTINUOUS PORTAL FRAME PANEL CONSTRUCTION

FIGURE BR02.10.4.11
METHOD CS-PF- CONTINUOUS PORTAL FRAME PANEL CONSTRUCTION


THIS HOME DESIGN IS PROTECTED BY FEDERAL COPYRIGHT LAWS. BY YOUR PURCHASE OF THIS PLAN FROM D&L DESIGN GROUP, INC YOU ARE GRANTED A LIMITED USAGE LICENSE TO CONSTRUCT ONE HOME OF THIS DESIGN. LICENSE IS GRANTED TO ORIGINAL PURCHASER ONLY. PURCHASER MAY NOT REPRODUCE THIS DESIGN BY ANY MEANS. PURCHASER MAY NOT SELL OR GIVE THIS DESIGN TO ANY OTHER ENTITY. UNAUTHORIZED USE OF THIS DESIGN SHALL CONSTITUTE INTENTIONAL INFRINGEMENT AND VIOLATION OF THE COPYRIGHT. WITHOUT FURTHER NOTICE D&L DESIGN GROUP, INC WILL PROSECUTE TO THE FULLEST ALLOWED BY LAW.

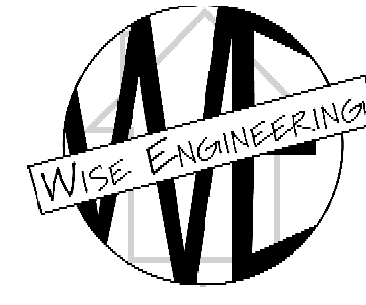

WISE ENGINEERING
3915 OLD FAIRGROUND RD.
ANGIER, NC 27801
(919) 994-2203

ENGINEER'S SEAL APPLIES ONLY TO STRUCTURAL COMPONENTS ON THIS DOCUMENT. SEAL DOES NOT INCLUDE CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, PROCEDURES, OR SAFETY PRECAUTION.


ANY DEVIATIONS OR DISCREPANCIES ON THE PLANS ARE TO BE BROUGHT TO THE ATTENTION OF THE ENGINEER IMMEDIATELY. FAILURE TO DO SO WILL VOID ALL ENGINEERING LIABILITY.

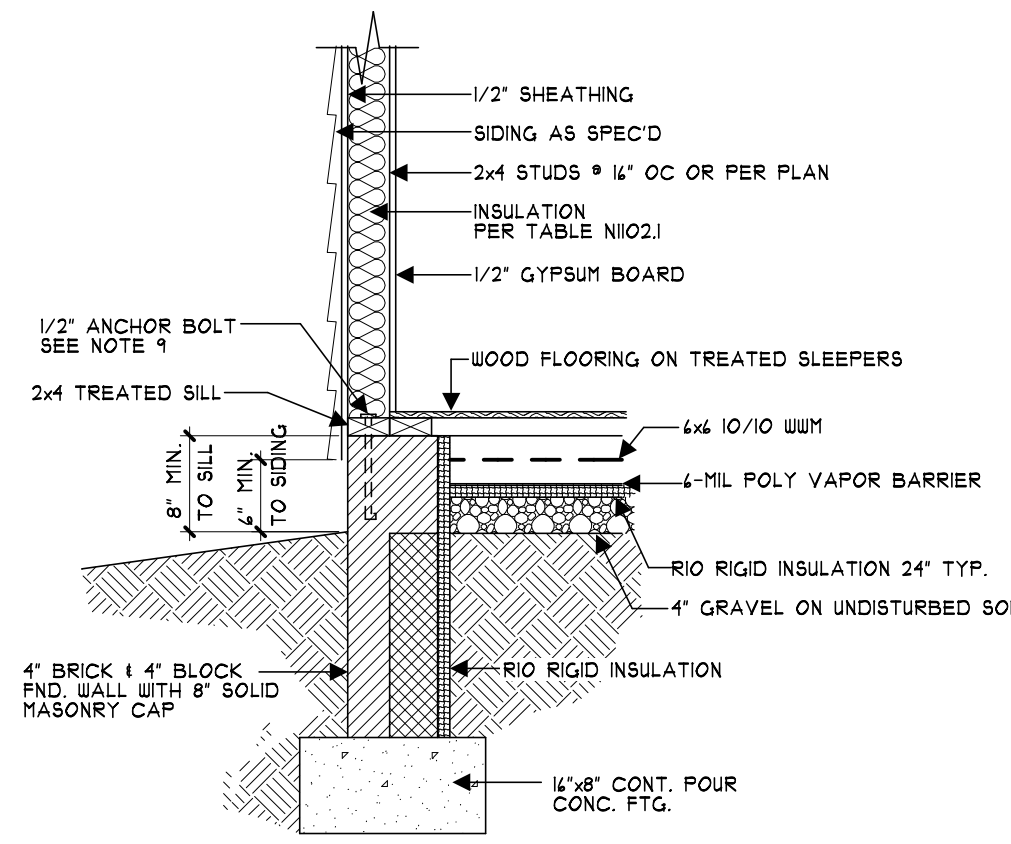

7 CONC. SLAB ABOVE GRADE
SCALE: 1"=10"

FOUNDATION PLAN

SCALE: 1/4" = 10"

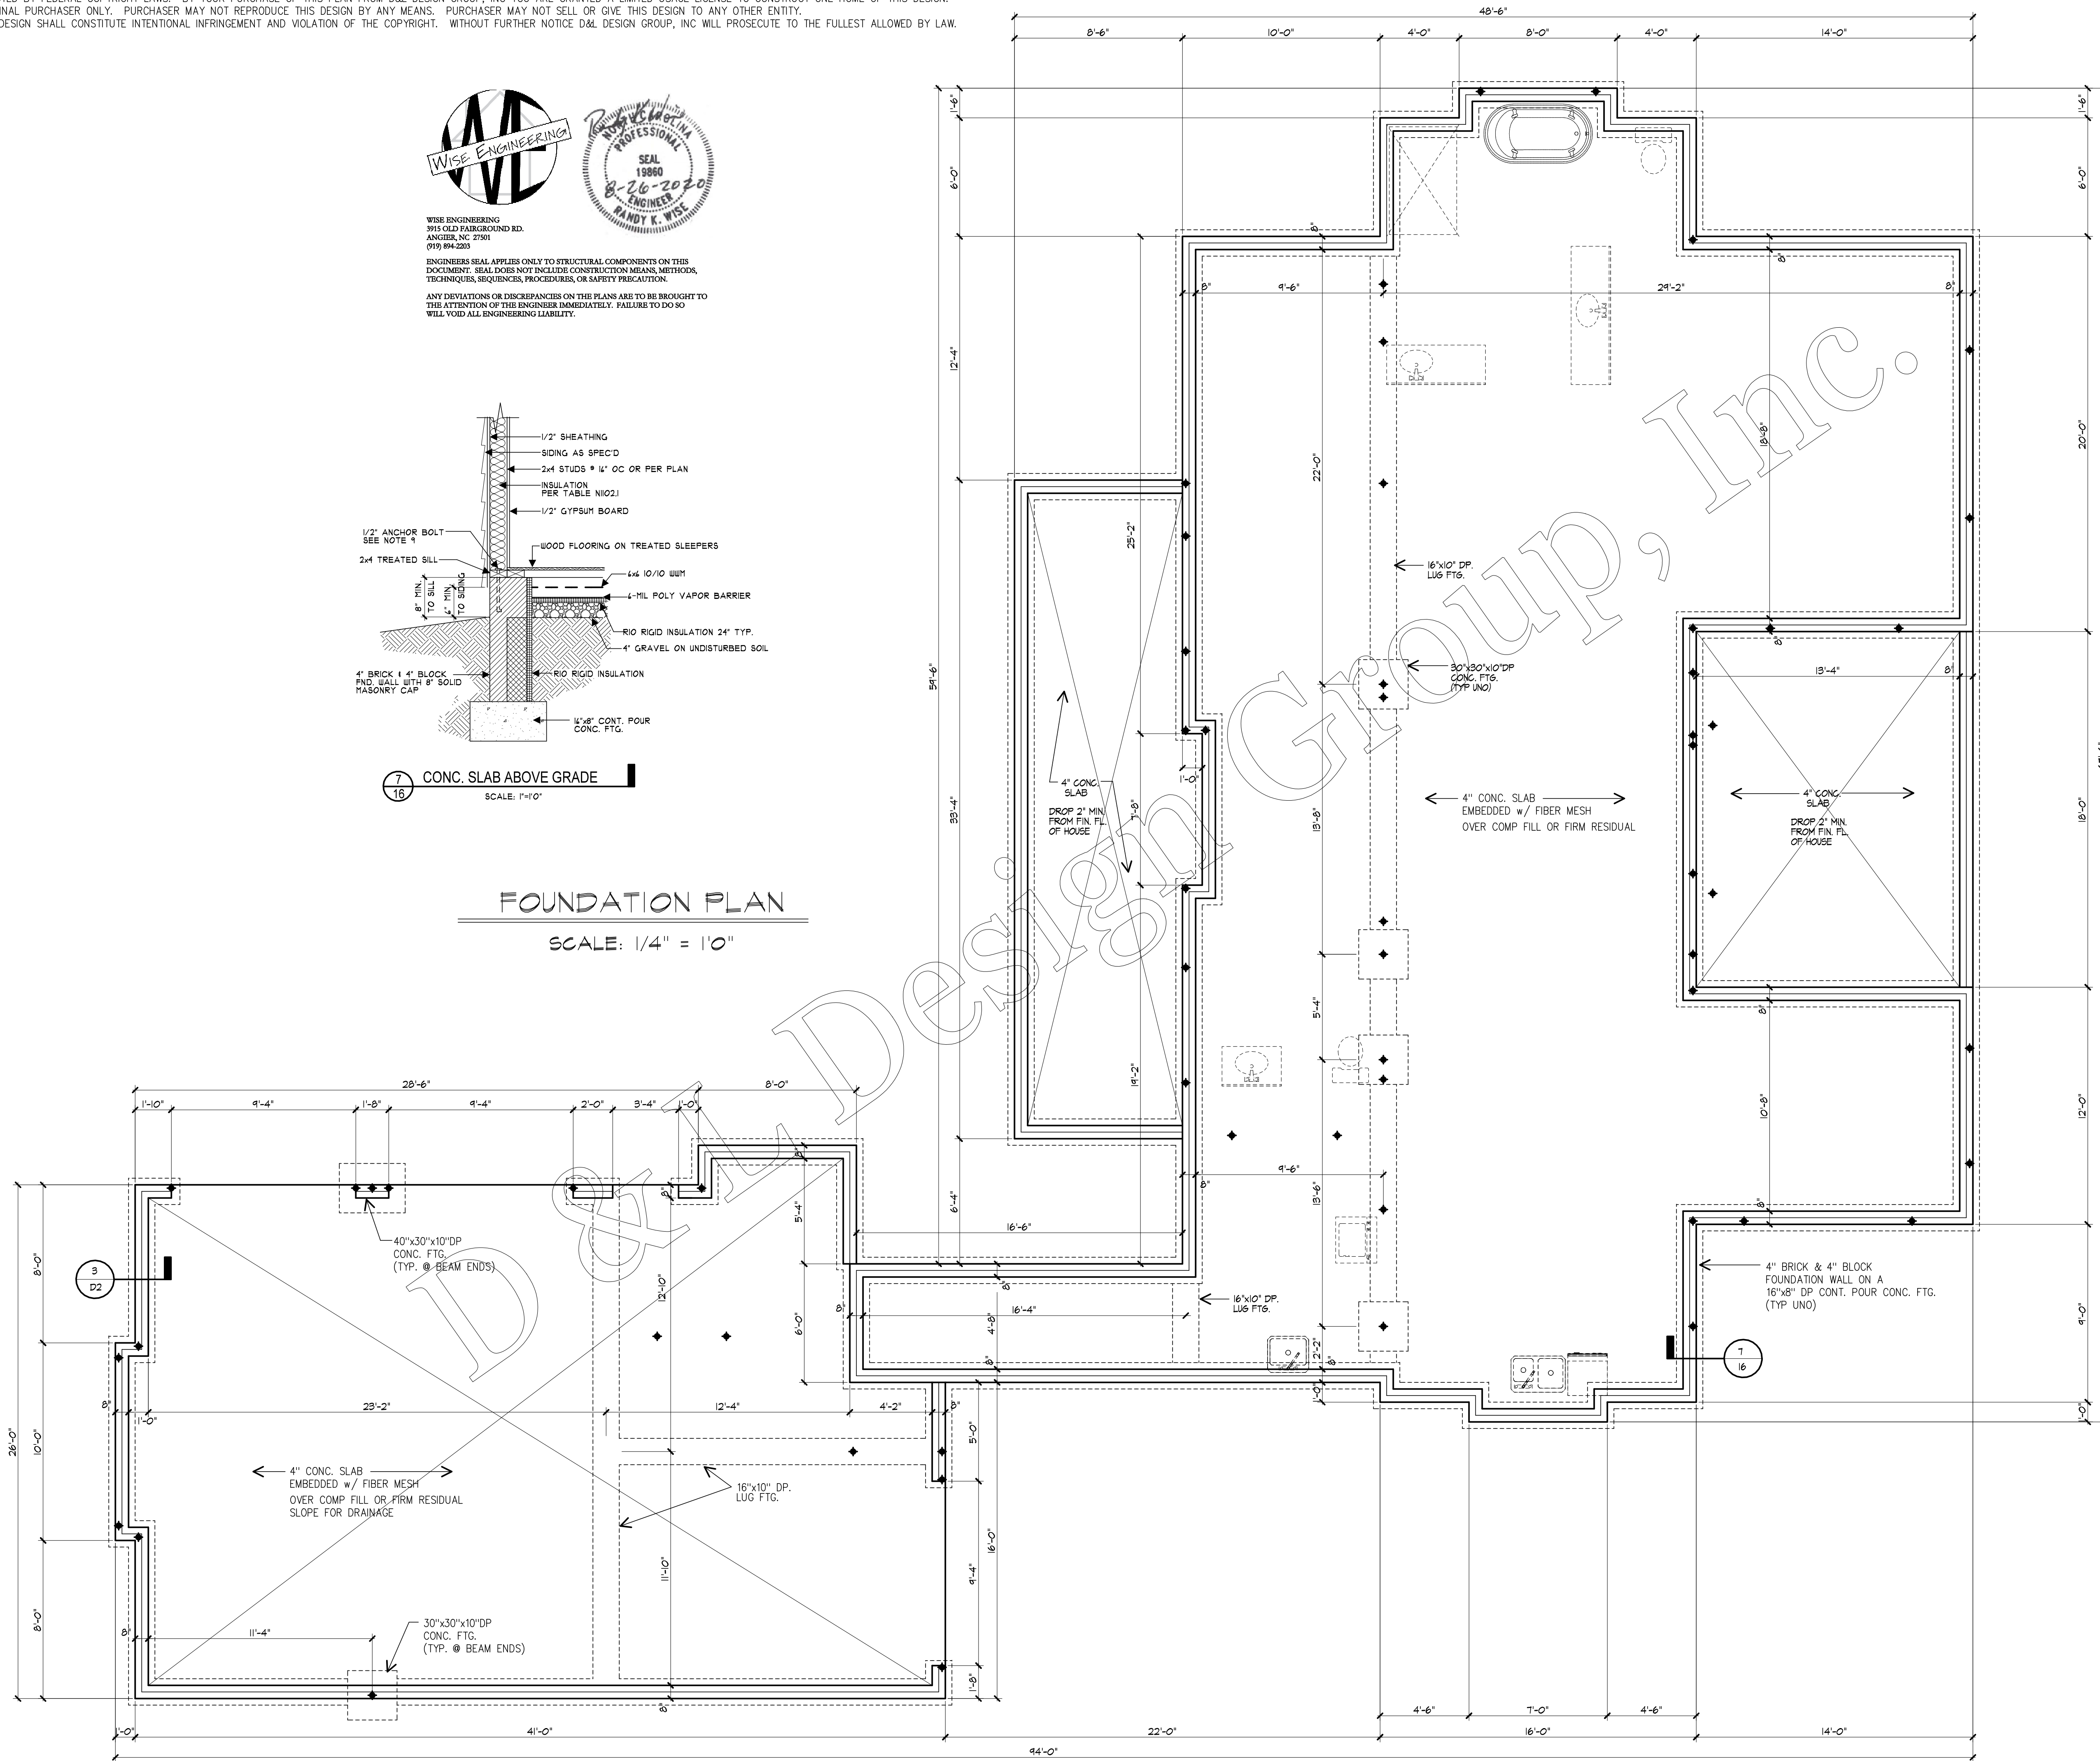

It is the sole responsibility of the contractor and or builder to determine whether these plans conform to all standards, provisions, requirements, methods of construction, and structures provided by applicable building codes, any other local agencies, and in accordance with good engineering and construction practice. D & L Design Group, Inc. does not assume liability for any deviation or discrepancy in these plans. If a discrepancy is discovered, please contact D & L Design Group, Inc. before continuing work.

Notes:
This plan conforms to N.C. State Building Code Residential Code, 2018 edition

HENDRICKS RESIDENCE
DL3228-C
Plan no.: DL3228-C

PO BOX 1162
CLAYTON, NC 27528
919-553-1966
dldesigngroup.com

D&L
DESIGN GROUP, INC.
custom and stock home plans

Date: 05/29/2018
Revisions: 5/5/2020

Index:
 1. ELEVATIONS
 2. FOUNDATION
 3. FIRST FLOOR
 4. SECOND FLOOR
 5. 1ST FL STRUCT
 6. 2ND FL STRUCT
 7. ROOF LAYOUT
 DI. NOTES & DETAILS
 D2. DETAILS

STEM WALL SLAB FOUNDATION
Sheet: 2 OF 1

8/19/2020, 7:05 PM

Hendricks_STEMWALL.dwg