


Client: Project: Address: Date: 3/10/2021

Input by:
Job Name: Hobbs

Level: Level

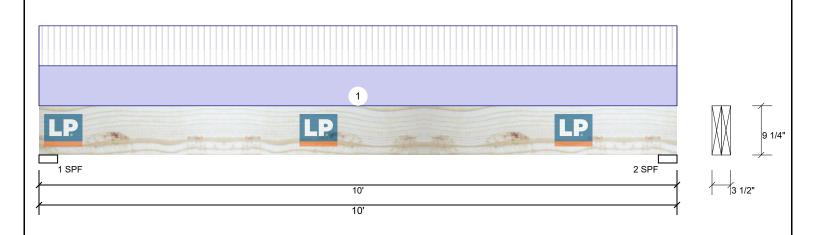

Member Information					Reactions UNPATTERNED lb (Uplift)							
Type:	Girder	Application:	Floor	Brg	Live	Dead	Snow	W	ind	Const		
Plies:	2	Design Method:	ASD	1	2050	2096	0		0	0		
Moisture Conditio	n: Dry	Building Code:	IBC/IRC 2015	2	2050	2096	0		0	0		
Deflection LL:	480	Load Sharing:	No									
Deflection TL:	240	Deck:	Not Checked									
Importance:	Normal											
Temperature:	Temp <= 100°F											
				Bearing	Bearings							
				Bearing	Length	Cap. Rea	ct D/L lb	Total L	_d. Case	Ld. Comb.		
				1 - SPF	3.500"	80% 209	96 / 2050	4146 L	_	D+L		
				2 - SPF	3.500"	80% 209	96 / 2050	4146 L	_	D+L		

Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	9437 ft-lb	5'	12416 ft-lb	0.760 (76%)	D+L	L
Shear	3317 lb	9'	6151 lb	0.539 (54%)	D+L	L
LL Defl inch	0.182 (L/628)	5'	0.239 (L/480)	0.760 (76%)	L	L
TL Defl inch	0.369 (L/311)	5'	0.477 (L/240)	0.770 (77%)	D+L	L

Design Notes

- 1 Provide lateral support to prevent rotation at end bearings and at interior bearings when required by code for seismic design.
- 2 Dead Load Deflection: Instant = 0.186", Long Term = 0.280"
- 3 Girders are designed to be supported on the bottom edge only.
- 4 Multiple plies must be fastened together as per manufacturer's details.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be continuously braced.
- 7 Bottom braced at bearings.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Uniform			Тор	410 PLF	410 PLF	0 PLF	0 PLF	0 PLF	Roof Truss Load
	Self Weight				9 PLF					

Notes

This component analysis is based on the loads, geometry and other conditions as entered by the user and listed in this report. The user is responsible to ensure the accuracy of the input and the applicability to the actual conditions of the structure for which this component is intended. This analysis is valid only for the product listed.

Copyright 2019 All rights reserved by Louisiana Pacific Corp. 414 Union St Suite 2000, Nashville, TN 37219

Manufacturer Info

Louisiana-Pacific Corp 414 Union Street, Suite 2000 Nashville, TN 37219 (888) 820-0325 www.lpcorp.com APA: PR-L280, ICC-ES: ESR-2403, LADBS: RR-25783, Florida: FL15228 BMC/Locust Lumber Company 312 E. Main Street, North Carolina 28127 704-888-4411

Page 1 of 1



This design is valid until 10/31/2021