06/11/2026

## Harnett County Department of Public Health

## Improvement Permit


A building permit cannot be issued with only an Improvement Permit PROPERTY LOCATION: 489 Village Bend Dr. (Rawls Ch. Rd. - SR ISSUED TO: Dan Ryan Builders - North Carolina, L SUBDIVISION Olde Mill Village REPAIR \_\_\_ EXPANSION Site Improvements required prior to Construction Authorization Issuance: NEW X Type of Structure: 40x50 sfd, 3 beds 2.5 baths Proposed Wastewater System Type: 25% Reduction System Projected Daily Flow: 360 GPD Number of bedrooms: 3 Number of Occupants: 6 Basement Yes X No X No May be required based on final location and elevations of facilities Pump Required: Yes Type of Water Supply: Community Public Well Distance from well NA Permit valid for: X Five years No expiration Permit conditions: Authorized State Agent:: SEE ATTACHED SITE SKETCH The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit. Construction Authorization (Required for Building Permit) The construction and installation requirements of Rules 1950, 1952, 1954, 1955, 1956, 1957, 1958, and 1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout. ISSUED TO: Dan Ryan Builders - North Carolina PROPERTY LOCATION: 489 Village Bend Dr. (Rawls Ch. Rd. - S SUBDIVISION Olde Mill Village Facility Type: 40x50 sfd, 3 beds 2.5 bat Expansion Repair X No Basement Fixtures? Yes Basement? Yes No Type of Wastewater System\*\* 25% Reduction System (Initial) Wastewater Flow: 360 (See note below, if applicable ) 25% Reduction System (Repair) Installation Requirements/Conditions Number of trenches 1 Septic Tank Size 1000 Exact length of each trench 300 Trench Spacing: 9 Feet on Center Pump Tank Size \_\_\_\_\_ Trenches shall be installed on contour at a Soil Cover: 12 gallons inches Maximum Trench Depth of: 24 (Maximum soil cover shall not exceed inches (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) Pump Requirements: ft. TDH vs. NA inches below pipe Aggregate Depth: NA inches above pipe Conditions: Gravity to Serial Dist.; Proposal by Adams Soil Consulting NA inches total WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. \*\*If applicable: 1 understand the system type specified is different from the type specified on the application. I accept the specifications of this permit. Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH 06/11/2021 Authorized State Agent:

Construction Authorization Expiration Date:

Curain

ANDREW

## Harnett County Department of Public Health Site Sketch

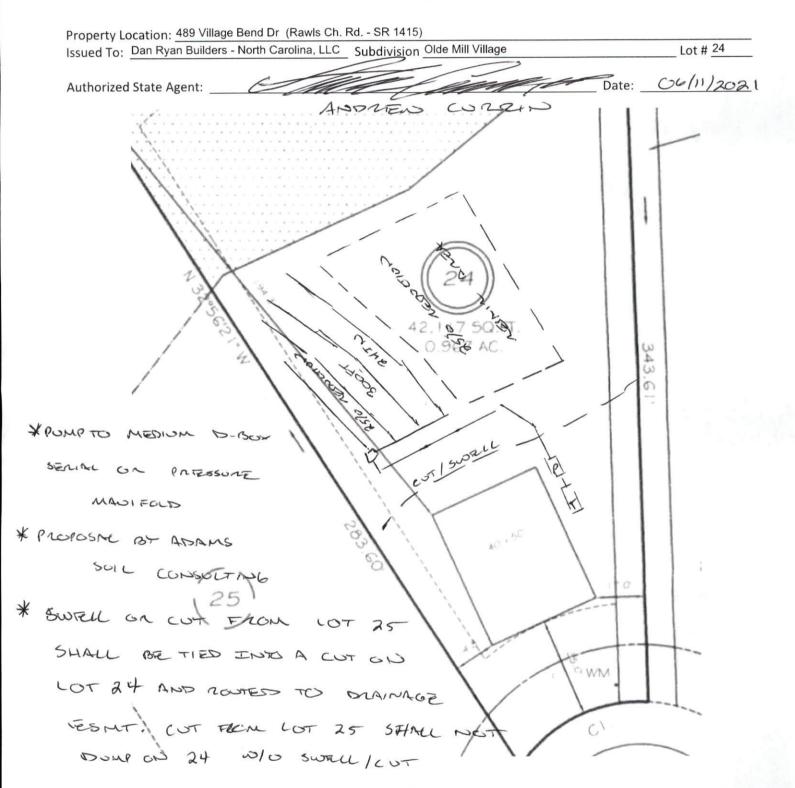

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.



System: Pressure Manifold Lines: 1-4 (300')

0.3 LTAR

24" Trench Bottom Accepted Status System Repair: Pressure Manifold

Lines: 5-9 (300')

0.3 LTAR

18" Trench Bottom Accepted Status System

> \*Preliminary Design Not a Permit



(24)

42,117 SF 0.967 AC 79.72

GRAPHIC SCALE 1" = 60' 0 60 120 Adams Soil Consulting 919-414-6761 Job #699