



Application for Plan Review

Application # 12-500 28147

Date Received 1-27-12 Received By V. Brown

Name of Project Pool House

Physical Address of Project Trotter Ridge Community Pool
NC

Plans Submitted By Jason Gordon

Project Phone (915)-756-3050

Contact Person/Address Jason Gordon



Contact Phone () - - () - -

Contractor s Name/Info Wym Construction Inc.

Contractor s Phone (915)-756-3050

- Plans that are submitted will be reviewed as quickly as possible with an average time of review between 7-10 working days
- Status checks may be conducted on plan reviews by visiting the website [http //hteweb.harnett.org/Click2GovBP/Index.jsp](http://hteweb.harnett.org/Click2GovBP/Index.jsp) or by calling the Harnett County Central Permitting Office (910-893-7525, Option #2), or the Harnett County Fire Marshal's Office (910-893-7580)
- Approved plans must be picked up from the Central Permitting Office and all fees paid before any required inspections can be conducted




Plan Review, Inspection and Permit Fees

Application Number 12-50028147

\$150.00	<input type="checkbox"/>	Explosive Mat. (90 Days)
\$ 75.00	<input type="checkbox"/>	Explosive Mat. (72 Hrs)
\$ 25.00	<input type="checkbox"/>	Fireworks Public Display
\$ 35.00	<input checked="" type="checkbox"/>	Final Inspection
\$ 35.00 +2.00 per device	<input type="checkbox"/>	Fire Alarm Testing
\$ 35.00 + 2.00 per nozzle	<input type="checkbox"/>	Fixed Fire Suppression
\$ 25.00	<input type="checkbox"/>	Insecticide Fog/Fumigation
\$ 50.00	<input type="checkbox"/>	Pipe Test/UST/AGST
\$ 50.00	<input checked="" type="checkbox"/>	Plans up to 5000 ft ²
\$100.00	<input type="checkbox"/>	Plans 5001 ft ² to 10,000 ft ²
\$150.00	<input type="checkbox"/>	Plans 10,001 ft ² to 25,000 ft ²
\$250.00	<input type="checkbox"/>	Plans 25,001 ft ² and over
\$ 35.00 + 2.00 per Head	<input type="checkbox"/>	Sprinkler Certification Test
\$ 35.00	<input type="checkbox"/>	Standpipe Testing
\$ 25.00	<input type="checkbox"/>	Special Assembly
\$ 25.00	<input type="checkbox"/>	Temporary Kiosks/Displays
\$ 25.00	<input type="checkbox"/>	Tents, Canopies, Air Supported
\$ 50.00	<input type="checkbox"/>	Tank Installation (charge for each tank)
\$ 50.00	<input type="checkbox"/>	Tank Removal (charge for each tank)

\$ 85.00 Total

n/a Total device/heads

Michael L. Martin 
Code Enforcement Official

2/6/2012
Date



February 6, 2012

Jason Gordon
Wynn Construction
2550 Capital Drive Suite 105
Creedmoor, NC 27522

Trotter's Ridge Community Pool


Application Number 12-50028147

Mr. Gordon

Thank you for submitting the plans for the pool house. The plans have been carefully reviewed by a qualified code enforcement official to examine for full compliance with the North Carolina Fire Prevention Code and all other fire protection regulatory documents. There are some items that were found during the plan review process that need to be addressed before a final inspection of the new facility can be given. These items are outlined and described below.

- **906.1 Fire Extinguishers**
 - Fire extinguishers shall be placed in approved locations as drawn by the code enforcement official on the approved plans.
 - The fire extinguishers provided shall have a minimum rating of 2A 10B:C and shall not be installed higher than 5 feet above the finished floor
 - As noted on plans

- **506.1 Knox Box**
 - A secure key box shall be installed on the new building that houses all keys to all the doors within the building in which the fire department would need access to in the event of an emergency.
 - Knox Box ID stickers shall be placed on all exterior doors in which entry to the building may be gained. Stickers are to be ordered through the order form.
 - The box shall be mounted not to exceed 48 – 60 inches in height.
 - An authorized order form is included with this letter.



- **505.1 Physical Address**
 - The physical address of the building shall be posted in a conspicuous place so that it can be seen on approach from the road, access road, and/or parking lot.
 - The numbers used to make up the physical address shall be at least 5 inches in height.
 - The address shall be posted on the interior of the building indicating the suite location in a conspicuous manner.


- **NFPA 704 Placard**
 - A NFPA 704 Placard shall be placed on the building. Information regarding the NFPA 704 placard is included with this letter. The ratings listed on the NFPA 704 placard shall be in accordance with the chemicals stored in the storage area.

Thank you again for submitting the plans for the clubhouse. Please review the plans and adhere to any notes and alterations that were made in addition to the original drawings. These remarks are for the plans that were submitted and its original intent. These remarks do not apply if the original intent changes or what was submitted on the above date changes. If you have any questions, please do not hesitate to call this office.

Again, thank you and we look forward to working with you during the construction period!

Thank You,

Michael L. Martin
Chief Deputy Fire Marshal

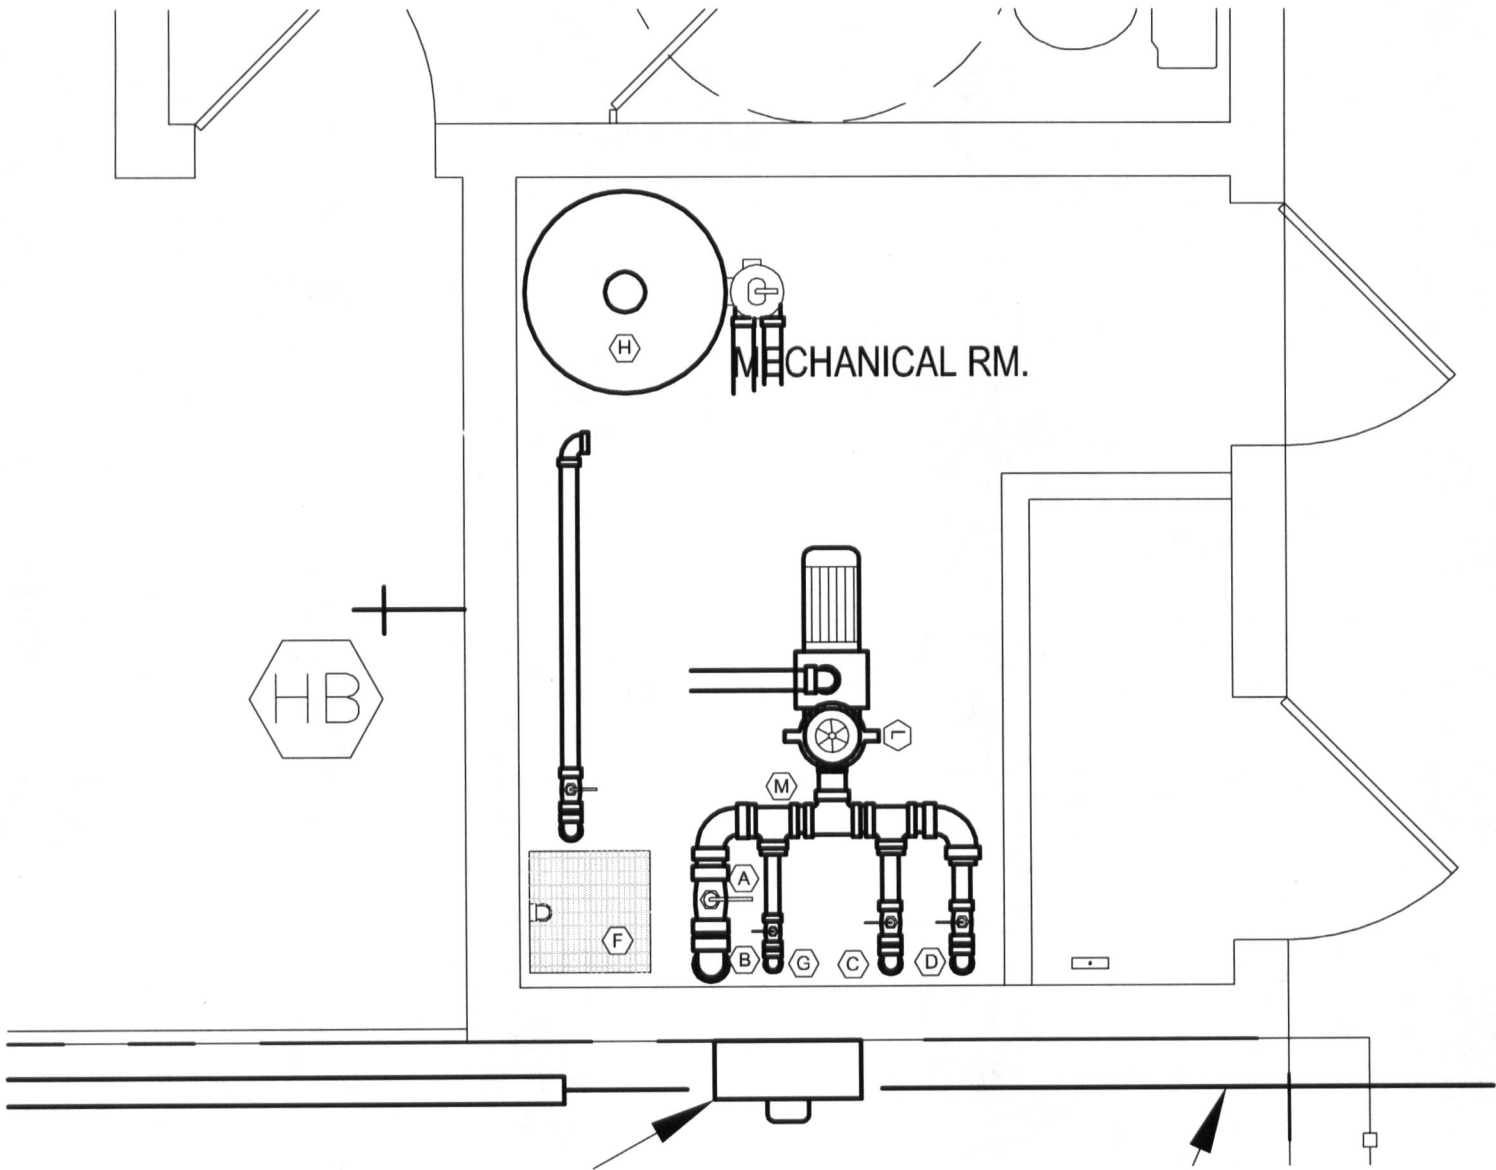

MECHANICAL RM.

HB

H

G

F

M

A

B

G

C

D

D

F