

HTE# 15-5-36685

Harnett County Department of Public Health

28583

Improvement Permit

Sears Tire & Auto

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Benton Dewar

PROPERTY LOCATION: Hwy 401 N

SUBDIVISION: SPENCE MILL INDUSTRIAL

LOT # 8

NEW REPAIR EXPANSION

Site Improvements required prior to Construction Authorization Issuance:

Type of Structure: TIRE + Auto BUSINESS

Proposed Wastewater System Type: 25% REDUCTION

Projected Daily Flow: 100 GPD

Number of bedrooms: 7 Number of Occupants: 4 Employees_{max}

Basement Yes No

Pump Required: Yes No May be required based on final location and elevations of facilities

Type of Water Supply: Community Public Well Distance from well _____ feet

Permit valid for: Five years

Permit conditions: _____

No expiration

Authorized State Agent: [Signature]

Date: 11-3-15

SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Benton Dewar

PROPERTY LOCATION: Hwy 401 N

SUBDIVISION: SPENCE MILL INDUSTRIAL LOT # 8

Facility Type: TIRE + Auto BUSINESS New Expansion Repair

Basement? Yes No Basement Fixtures? Yes No

Type of Wastewater System** Pump to 25% REDUCTION System (Initial) Wastewater Flow: 100 GPD

(See note below, if applicable)

Pump to 25% REDUCTION (Repair)

Installation Requirements/Conditions

Septic Tank Size 1000 gallons

Number of trenches 3

Exact length of each trench 60 feet

Trench Spacing: 9 Feet on Center

Pump Tank Size 1000 gallons

Trenches shall be installed on contour at a

Soil Cover: 6 inches

Maximum Trench Depth of: 18" inches

(Maximum soil cover shall not exceed 36" above the trench bottom)

(Trench bottoms shall be level to +/- 1/4"

in all directions)

Pump Requirements: _____ ft. TDH vs. _____ GPM

Aggregate Depth: 6 inches below pipe

2 inches above pipe

Conditions: _____

12 inches total

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____

Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This

Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit.

SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature]

Date: 11-3-15

Construction Authorization Expiration Date: 11-3-20

HTE# 15-5-36685

Permit # 28583

Harnett County Department of Public Health Site Sketch

Sears Tire & Auto

ISSUED TO: Benton Dewar

PROPERTY LOCATOR: Hwy 401 N

SUBDIVISION: Spencer Mill


LOT # 8

Authorized State Agent:

James E. Mankin

Date: 11-3-15

Pump may NOT
BE NEEDED
IF PLUMBERS
IS STUBBED
OUT HIGH ENOUGH
TO ACCOMMODATE
18" max ditches

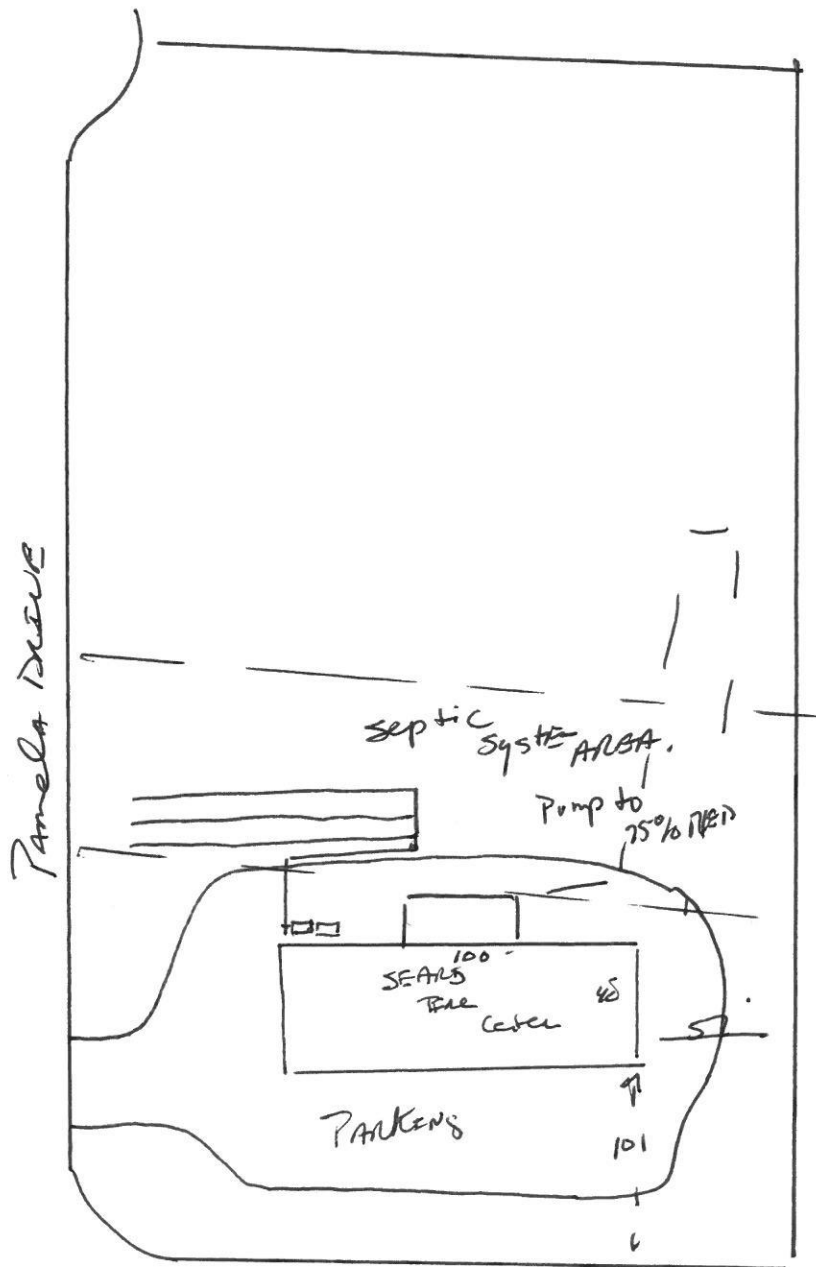

US Hwy 401