

DAVID MILLER, PE

6300 Creedmoor Rd, STE 170#363

Raleigh, NC 27612

(919) 422-8932 (Office); DAVE@DMA-PA.COM

October 16,2018

Carolina Diesel Trucks, LLC
62 Progress Dr.
Fuquay Varina, NC 27526
Thomas Andrews
E-mailed to: info@carolinadieseltrucks.com


RE: Engineering - Footing Extension
62 Progress Dr. ; Fuquay Varina, NC 27526 : Harnett County
Project No.:18DDM-1016I

To whom it may concern/ Inspections Dept.:

The undersigned arrived on-site previously and analyzed the following for the above referenced site. The front section of the concrete slab requires an extension to support the window front and based on the analysis an extension (full depth) at least 6 inches with two dowelled #4 reinforcing steel bars no greater than 16" c/c should be added to allow the concrete slab extension to adequately transfer and support the planned loading conditions.

Sincerely, David Miller, PE

DocuSigned by:

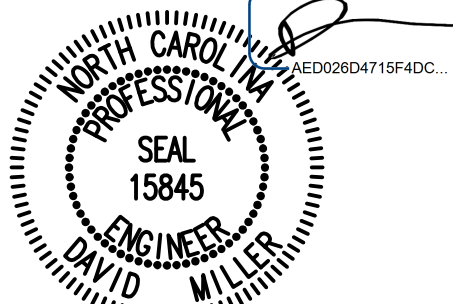

AED026D4715F4DC...

10/16/2018 4:43:07 PM PDT

DEM/18DDM-1016I