

HTE 04-5-8687

IMPROVEMENT PERMIT

21095

Be it ordained by the Harnett County Board of Health as follows: Section III, Item B. "No Person shall begin construction of any building at which a septic tank system is to be used for disposal of sewage without first obtaining a written permit from the Harnett County Health Department."

Name: (owner) Kent Pierce
Property Location: SR# Peach Tree 1115
New Installation, Septic Tank, Repairs, Nitrification Line

Subdivision Peach Tree Lot # 101

Tax ID # Quadrant #

Number of Bedrooms Proposed: 3 (28x50) Lot Size: .93 AC

Basement with Plumbing: Garage: [checked]

Water Supply: Well, Public, Community

Distance From Well: 50 ft.

Following is the minimum specifications for sewage disposal system on above captioned property. Subject to final approval.

Type of system: Conventional, Other

Size of tank: Septic Tank: 1000 gallons Pump Tank: gallons

Subsurface Drainage Field: No. of ditches 1, exact length of each ditch 300 ft., width of ditches 3 ft., depth of ditches 18 in.


French Drain Required: Linear feet

Date: 02-09-04

Signed: [Signature] Environmental Health Specialist

This permit is subject to revocation if site plans or intended use change.

MUST meet on site

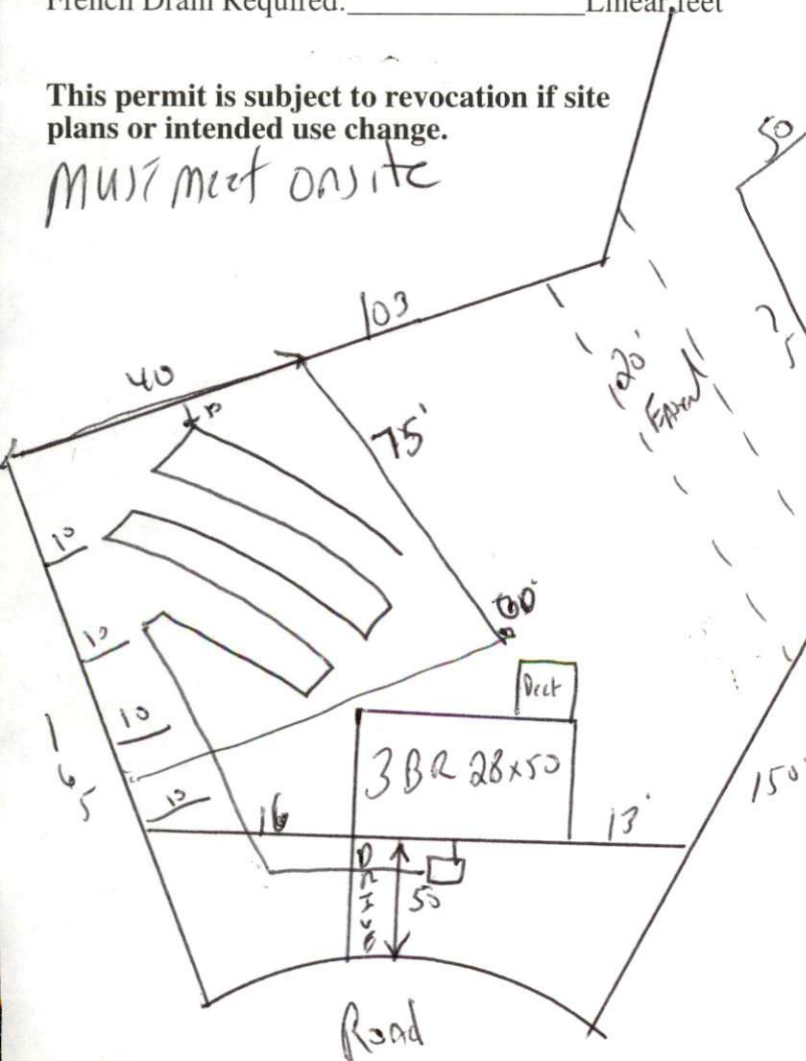

NOTE Lines start where house is 18' from side line

STUB out Plumbing Shallow - In front of house Run PVC pipe under drive Sleeved with crust proof pipe Dutch Iron or equal MAINTAIN ALL SETBACKS

HARNETT COUNTY HEALTH DEPARTMENT  
AUTHORIZATION TO CONSTRUCT

Authorization is hereby given to construct a wastewater system to the specifications described by Harnett County Health Department, Improvement Permit # 21095. This authorization shall be valid for a period not to exceed five (5) years from the date of issuance. This authorization will be invalid if ownership, site plans, or intended use change.

Name Kent Pierce Telephone# \_\_\_\_\_

Address \_\_\_\_\_

Property Location SR# 1115

Subdivision Peach Tree Lot # 101 # Bedrooms Proposed 3(28x50) Road Name 93ac Lot Size \_\_\_\_\_

**TYPE OF SYSTEM**

New Installation  Repair  Septic Tank  Nitrification Lines

Conventional  Other \_\_\_\_\_

Basement  With Plumbing  Without Plumbing

Water Supply:  Well  Public Water Supply Minimum Well Setback: \_\_\_\_\_ Ft.

Septic Tank 1000 gal Pump Chamber \_\_\_\_\_ gal

**NITRIFICATION FIELD SPECIFICATIONS**

Number of fields 1 # of lines per field 1 Length of lines 300 Ft.

Width of ditches 3 ft. Depth of ditches 18 max inches

French Drain: Linear feet required \_\_\_\_\_ Depth of gravel \_\_\_\_\_

No wastewater system shall be covered or placed into use by any person until an inspection by the Harnett County Health Department has determined that the system has been installed according to the conditions of the Improvement Permit and that a valid Operations Permit has been issued.

Signature of Authorized Agent for Harnett County of Harnett Joe Waters

Date 02-09-04