

HTE 04-59274

17393

OPERATIONS PERMIT

Name: (owner) 59k Homes New Installation Septic Tank
 Property Location: SR# 1141 Repairs Nitrification Line
 Subdivision Highland Forest Lot # 29
 Tax ID # _____ Quadrant # _____
 Contractor: Ted Brown Registration # _____

Basement with Plumbing: Garage:

Water Supply: Well Public Community

Distance From Well: _____ ft.

Following are the specifications for the sewage disposal system on above captioned property.

Type of system: Conventional Other Infiltrator Quik 4

Size of tank: Septic Tank: 500 gallons Pump Tank: _____ gallons


Subsurface Drainage Field No. of ditches 1 exact length of each ditch 150 ft. width of ditches 3 ft. depth of ditches 18-20 in.

French Drain Required: _____ Linear feet

Date: 07-20-04

Inspected by: Jahid R
Environmental Health Specialist

PERMIT NO. 20449

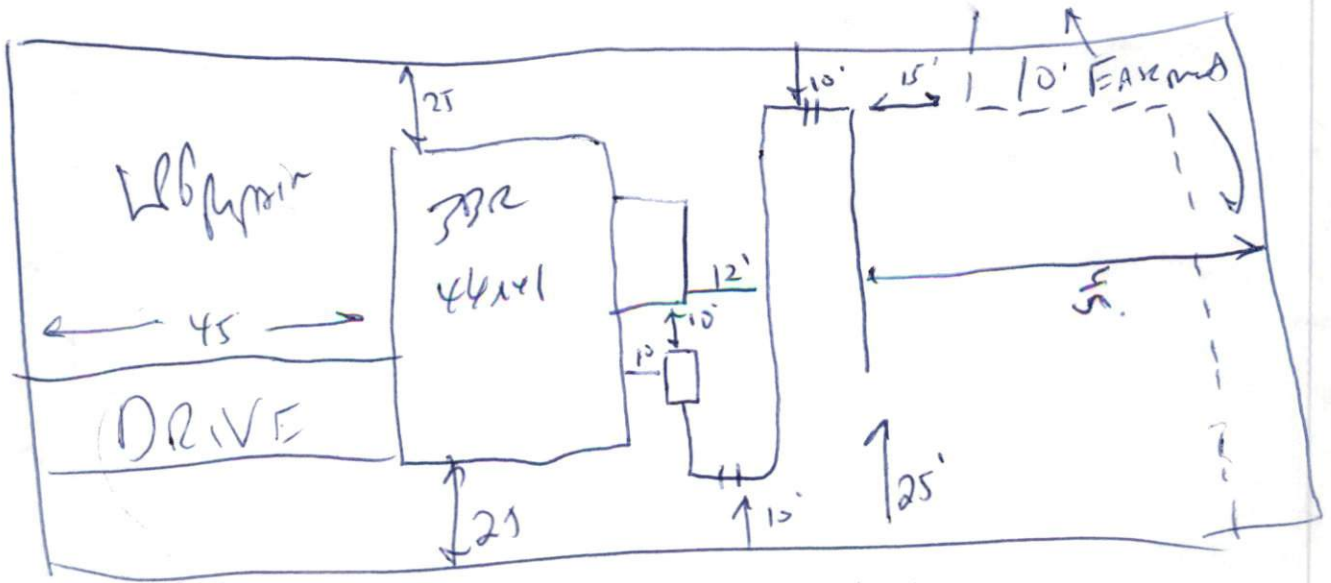

Paper placed along sides of chamber to prevent clogging